

Power Splitter/Combiner

8 Way-0° 50Ω 800 to 2000 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.875W max.
DC Current	1.8A (225mA for each port)

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S
PORT 1,2,3,4,5,6,7,8	1,2,3,4,5,6,7,8

Outline Drawing

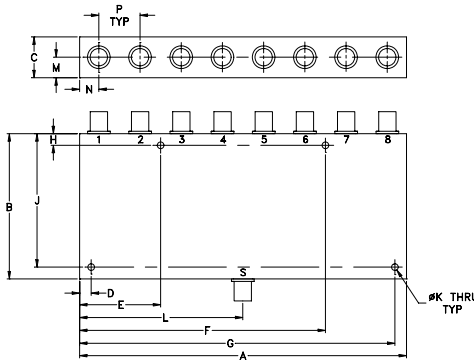


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
7.06	3.13	.88	.250	1.750	5.310	6.810	.250
179.32	79.50	22.35	6.35	44.45	134.87	172.97	6.35

J	K	L	M	N	P	wt
2.875	.144	3.53	.44	.415	.89	grams
73.03	3.66	89.66	11.18	10.54	22.61	800

Electrical Schematic



Features

- wideband, 800 to 2000 MHz
- low insertion loss, 0.8 dB typ.
- good isolation, 26 dB typ.
- up to 10W power input
- rugged, shielded case

Applications

- cellular
- PCS/DCS
- communication systems
- GPS

ZB8PD-2000+



Generic photo used for illustration purposes only

SMA version shown

CASE STYLE: Z41

Connectors	Model
SMA	ZB8PD-2000-S+
N-TYPE	ZB8PD-2000-N+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		800		2000	MHz
Insertion Loss (above theoretical 9.0 dB)	800 - 2000	—	0.8	1.6	dB
Isolation	800 - 2000	20	26	—	dB
Phase Unbalance	800 - 2000	—	3	7	Degree
Amplitude Unbalance	800 - 2000	—	0.3	0.7	dB
VSWR (Port S)	800 - 2000	—	1.25	1.7	:1
VSWR (Port 1-8)	800 - 2000	—	1.1	1.35	:1

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)						Amplitude Unbalance (dB)				Isolation (dB)				Phase Unbalance (deg.)		VSWR		
	S-1	S-2	S-3	S-4	S-6	S-8					1-2	2-3	3-4	5-6			S	1	8
800	9.52	9.56	9.55	9.54	9.49	9.49	0.07	32.53	33.61	32.18	31.04	1.34	1.39	1.09	1.11				
850	9.46	9.50	9.50	9.48	9.44	9.43	0.07	32.07	32.95	31.29	30.12	1.39	1.24	1.09	1.10				
900	9.43	9.48	9.48	9.45	9.42	9.41	0.07	30.29	31.11	29.75	28.56	1.42	1.12	1.08	1.09				
950	9.44	9.49	9.49	9.45	9.43	9.41	0.08	29.09	30.16	29.09	27.59	1.43	1.06	1.08	1.09				
1000	9.45	9.51	9.51	9.46	9.45	9.43	0.08	28.39	29.88	29.07	27.08	1.42	1.08	1.09	1.09				
1100	9.49	9.55	9.55	9.50	9.50	9.47	0.08	26.10	27.60	27.29	25.35	1.40	1.14	1.09	1.08				
1200	9.55	9.63	9.63	9.57	9.58	9.53	0.10	24.83	25.88	25.04	24.21	1.37	1.25	1.07	1.05				
1300	9.56	9.65	9.68	9.60	9.60	9.53	0.14	27.34	27.61	27.22	26.57	1.25	1.24	1.05	1.03				
1400	9.59	9.69	9.74	9.66	9.66	9.56	0.18	31.09	28.70	29.19	31.39	1.10	1.29	1.07	1.04				
1500	9.62	9.73	9.80	9.71	9.72	9.60	0.20	35.80	30.92	31.91	37.65	1.13	1.36	1.06	1.04				
1600	9.55	9.66	9.73	9.63	9.65	9.52	0.22	35.33	47.41	43.64	33.62	1.22	1.12	1.08	1.07				
1700	9.64	9.76	9.83	9.72	9.73	9.59	0.23	26.54	29.26	29.04	26.22	1.47	1.28	1.16	1.15				
1800	9.70	9.82	9.90	9.78	9.80	9.65	0.25	27.41	30.48	30.36	27.09	1.80	1.36	1.16	1.17				
1900	9.60	9.72	9.83	9.69	9.73	9.56	0.27	41.34	45.00	42.05	39.29	2.27	1.07	1.10	1.11				
2000	9.75	9.87	10.01	9.86	9.91	9.69	0.32	32.69	29.55	29.70	35.35					1.42	1.12	1.13	

1. Total Loss = Insertion Loss + 9dB splitter loss.

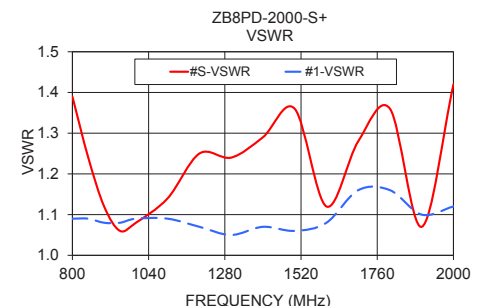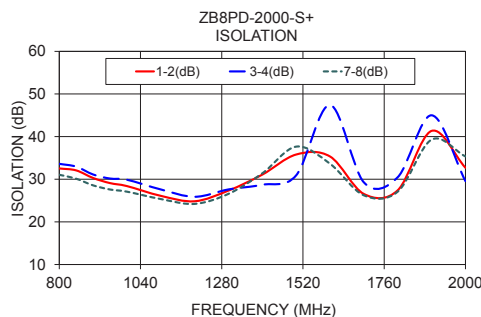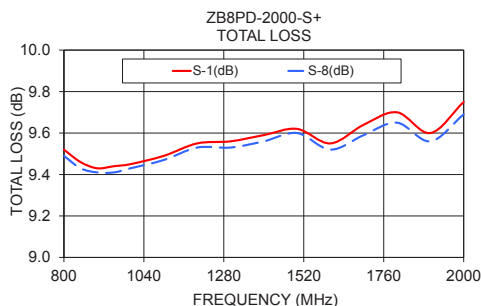

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. F
M156738
ZB8PD-2000+
ED-16064/1
WZ/TD/CP
160707

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZB8PD-2000-S+](#)