

DC Pass, High Power

Power Splitter/Combiner

ZC2PD-K0144+

2 Way-0° 50Ω 1000 to 40000 MHz

The Big Deal

- Super wideband, 1 to 40 GHz
- Low insertion loss, 0.9 dB typ.
- High Isolation, 36 dB typ.
- 20W power handling
- Low amplitude unbalance, 0.05 dB typ.



CASE STYLE: UU2624-2

Product Overview

Mini-Circuits' ZC2PD-K0144+ is a super wideband 2-way 0° splitter/combiner providing coverage from 1 to 40 GHz, supporting a wide range of applications including 5G, Ku-Band, K-Band, instrumentation and many more. This model provides 20W power handling as a splitter and very low insertion loss across the entire operating frequency range, minimizing power dissipation and delivering excellent signal power transmission from input to output. The ZC2PD-K0144+ comes housed in a case measuring 3.75 x 1.02 x 0.5".

Key Features

Feature	Advantages
Ultra-wideband, 1 to 40 GHz	Extremely wide frequency range supports many broadband applications in a single model. Ideal for use in wideband instrumentation
Low insertion loss, 0.9 dB typ. at 13 GHz	The combination of 20W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
High isolation, 36 dB typ. at 13 GHz	Minimizes interference between ports.
High power handling: • 20W as a splitter at 25°C • 0.45W as a combiner	The ZC2PD-K0144+ is suitable for systems with a wide range of power requirements.
Low amplitude unbalance, 0.05 dB at 13 GHz	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
DC Passing, 440mA	Supports applications where DC power is needed to pass through the RF line.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



DC Pass, High Power Power Splitter/Combiner

2 Way-0° 50Ω 1000 to 40000 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	20W* max.
Internal Dissipation	0.45W max.
DC Current	440 mA
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

Sum Port	S
Port 1	1
Port 2	2





Outline Drawing



Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	
3.75	1.02	.50	.750	2.250	.151	.25	
95.25	25.91	12.70	19.05	57.15	3.84	6.35	
H	J	K					wt
.094	.52	.47					grams
2.39	13.21	12					105

Electrical Schematic

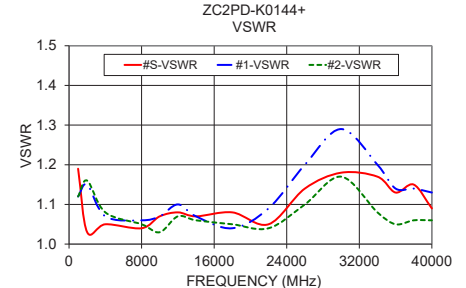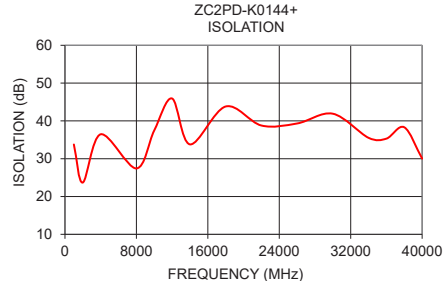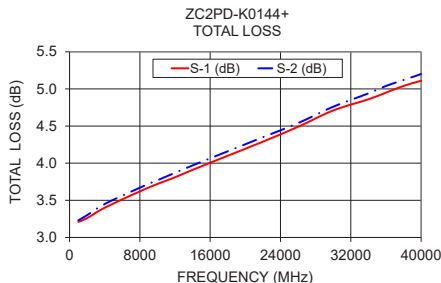

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Features

- Super wideband, 1000 - 40000 MHz
- Low insertion loss, 0.9 dB typ.
- Low amplitude unbalance, 0.05 dB typ.
- Excellent VSWR, 1.06:1 typ.
- High isolation, 36 dB typ.

Applications

- 5G
- Fixed satellite
- Space research
- Mobile

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		1000		40000	MHz
Insertion Loss Above 3.0 dB	1000 - 8000		0.5	0.9	
	8000 - 18000		0.9	1.3	
	18000 - 26500		1.3	1.7	
	26500 - 40000		1.9	2.4	
Isolation	1000 - 8000	17	28		
	8000 - 18000	18	36		
	18000 - 26500	18	37		
	26500 - 40000	18	35		
Phase Unbalance (±)¹	1000 - 8000		0.4	2	
	8000 - 18000		1.1	3	
	18000 - 26500		1.8	4	
	26500 - 40000		2.5	5	
Amplitude Unbalance (±)¹	1000 - 8000		0.03	0.2	
	8000 - 18000		0.05	0.3	
	18000 - 26500		0.07	0.3	
	26500 - 40000		0.11	0.4	
VSWR (Port S)	1000 - 8000		1.05	1.3	
	8000 - 18000		1.06	1.4	
	18000 - 26500		1.07	1.5	
	26500 - 40000		1.11	1.5	
VSWR (Port 1-2)	1000 - 8000		1.08	1.3	
	8000 - 18000		1.05	1.4	
	18000 - 26500		1.07	1.5	
	26500 - 40000		1.08	1.5	

1. With reference to average.

Typical Performance Data

Frequency (MHz)	Total Loss¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1000	3.21	3.23	0.02	33.76	0.04	1.19	1.12	1.12
2000	3.26	3.30	0.04	23.70	0.02	1.03	1.15	1.16
4000	3.40	3.45	0.05	36.46	0.17	1.05	1.07	1.08
8000	3.62	3.67	0.05	27.43	0.55	1.04	1.06	1.05
10000	3.72	3.77	0.06	37.48	0.76	1.07	1.07	1.03
12000	3.81	3.87	0.06	45.92	0.92	1.08	1.10	1.07
14000	3.91	3.97	0.06	33.79	1.10	1.07	1.07	1.06
18000	4.10	4.16	0.07	43.81	1.54	1.08	1.04	1.05
22000	4.29	4.35	0.06	38.78	1.87	1.05	1.09	1.04
26000	4.49	4.54	0.05	39.32	2.19	1.14	1.20	1.10
30000	4.71	4.76	0.05	41.90	2.48	1.18	1.29	1.17
34000	4.86	4.94	0.08	35.52	3.11	1.17	1.20	1.08
36000	4.95	5.04	0.08	35.31	3.47	1.13	1.14	1.05
38000	5.04	5.12	0.08	38.31	3.90	1.15	1.14	1.06
40000	5.11	5.20	0.09	30.03	4.13	1.09	1.13	1.06

1. Total Loss = Insertion Loss + 3dB splitter theoretical

ZC2PD-K0144+



Generic photo used for illustration purposes only

CASE STYLE: UU2624-2

Connectors	Model
2.92mm-Fem	ZC2PD-K0144+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZC2PD-K0144+](#)