

Frequency Mixer WIDE BAND

ZX05-43-S+

Level 7 (LO Power +7 dBm) 750 to 4200 MHz

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

LO	2
RF	3
IF	1

Outline Drawing

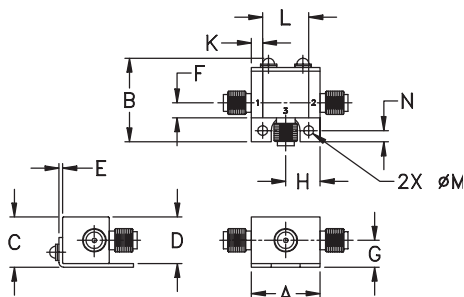

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.74	.90	.54	.50	.04	.16	.29
18.80	22.86	13.72	12.70	1.02	4.06	7.37

H	J	K	L	M	N	wt
.37	--	.122	.496	.106	.122	grams
9.40	--	3.10	12.60	2.69	3.10	20.0

Features

- wide bandwidth, 750 to 4200 MHz
- low conversion loss, 6.1 dB typ.
- excellent L-R isolation, 35 dB typ.
- rugged construction
- small size
- useable as up and down converter
- protected by US patents, 6,790,049 and 7,027,795

Applications

- cellular
- defense and weather radar
- defense communications
- PCN
- WCDMA
- WIFI
- blue tooth
- VSAT
- ISM

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
		Typ.	σ	Max.	Typ.	Min.	Typ.	Min.	
LO/RF $f_c - f_u$	IF								
750-4200	DC-1500								
750-2500		6.3	0.1	8.3	35	29	24	9	12
2500-4200		6.0	0.1	8.9	26	22	20	13	12


1 dB COMP. : +1 dBm typ.

* Conversion loss at 30 MHz IF. σ is a measure of repeatability from unit to unit.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
750.00	780.00	7.32	41.67	24.97	2.28	9.85
950.00	980.00	6.99	39.87	26.96	2.12	3.01
1150.00	1180.00	6.57	41.71	30.28	3.13	1.46
1350.00	1380.00	6.50	35.27	33.17	3.18	1.13
1550.00	1580.00	6.39	33.25	28.75	2.99	1.71
1750.00	1780.00	6.56	35.54	21.12	2.87	2.05
1950.00	1980.00	6.87	33.83	13.03	3.17	1.91
2150.00	2180.00	6.83	34.63	12.22	3.02	1.91
2350.00	2380.00	6.23	32.19	14.93	2.37	2.03
2550.00	2580.00	6.67	30.60	17.84	2.54	1.97
2750.00	2780.00	5.56	29.18	19.08	1.71	1.51
2950.00	2980.00	5.24	28.19	21.52	1.40	1.40
3150.00	3180.00	5.47	26.03	25.95	1.63	1.16
3350.00	3380.00	5.84	26.52	25.86	1.63	1.18
3550.00	3580.00	6.31	25.30	22.00	2.33	1.59
3750.00	3780.00	6.53	25.45	19.15	2.80	2.01
3950.00	3980.00	7.42	26.91	19.85	3.70	2.67
4150.00	4180.00	7.65	26.78	16.35	3.79	3.59
4190.00	4220.00	7.83	27.09	15.96	3.73	3.79
4210.00	4240.00	7.57	27.32	15.67	3.69	3.84

Electrical Schematic

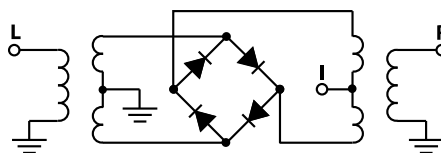

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Generic photo used for illustration purposes only

CASE STYLE: FL905









Connectors	Model
SMA	ZX05-43-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Performance Charts

ZX05-43-S+

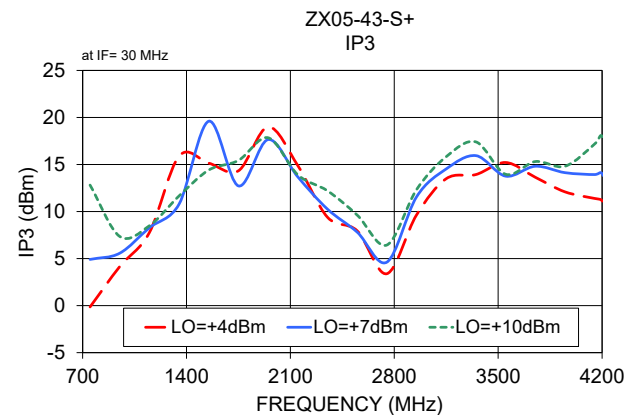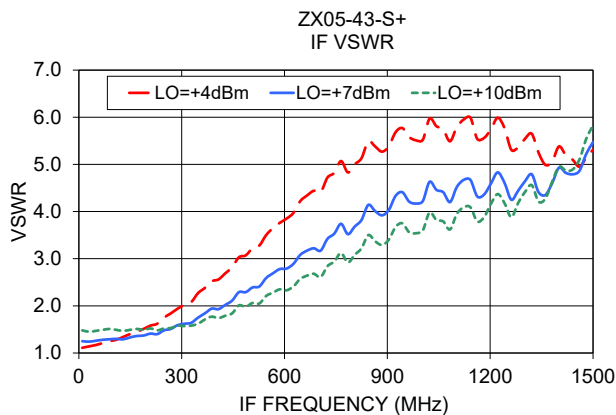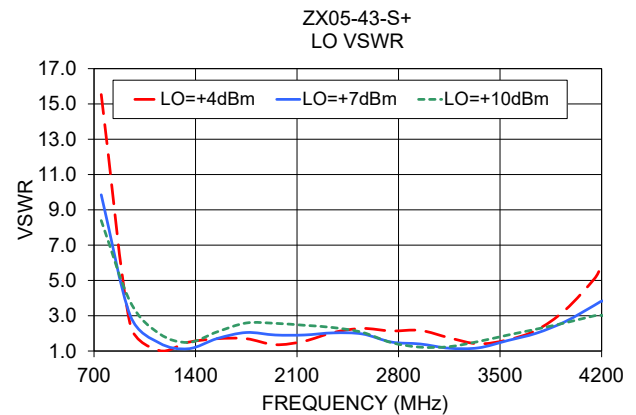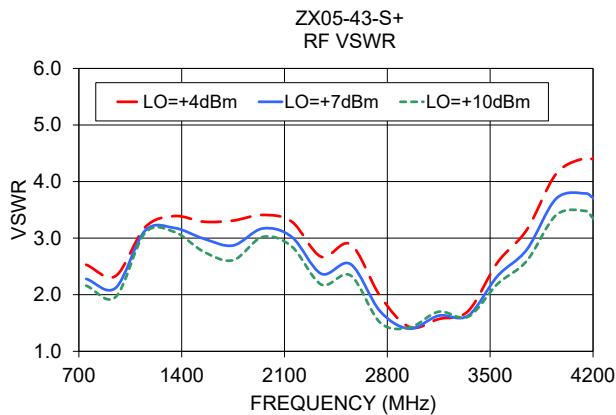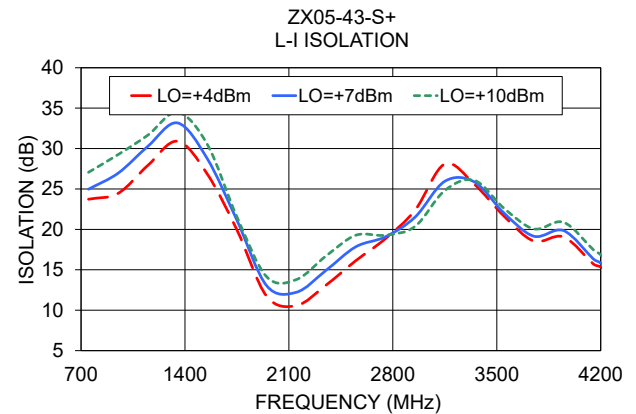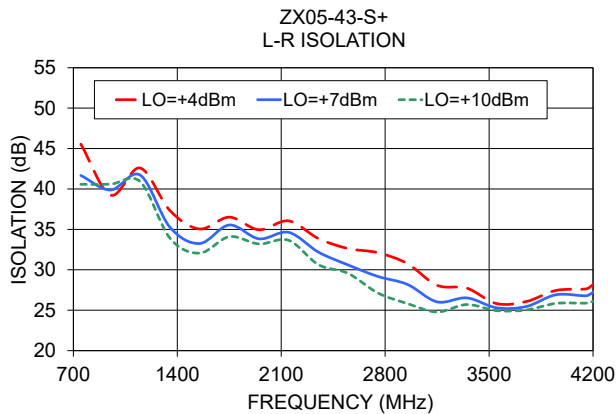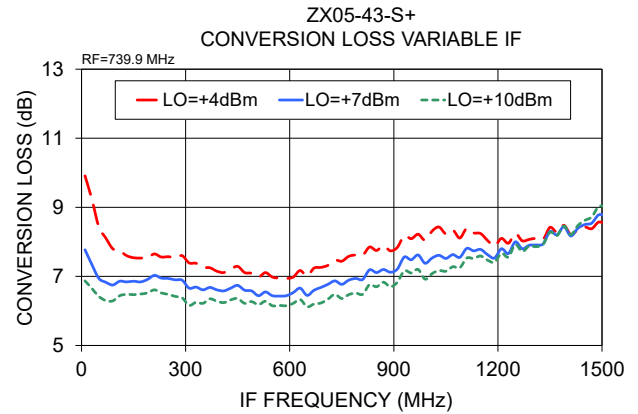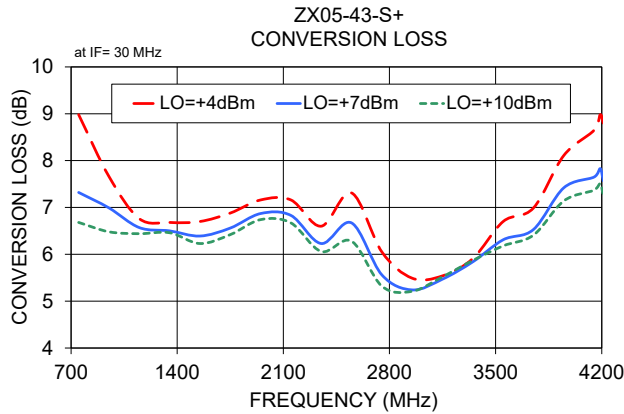

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZX05-43-S+](#)