

Conductive Sensors 2 to 4-point level controller Type CL with potentiometer

CARLO GAVAZZI



- Conductive level controller
- Adjustment of sensitivity – operating resistance from 250Ω to 500KΩ
- Multiple combinations of filling and emptying applications
- Low-voltage AC electrodes
- Easy installation on DIN rails or with 11 pin circular plug
- Rated operational voltage:
24 VAC/DC, 115 VAC or 230 VAC
- Output 2x8A/250 VAC SPDT relay
- LED indication for: Output ON and Power ON



Product Description

μ-Processor based level controller for liquids with a wide sensitivity range (like sewage water, chemicals, salt water etc.). The controller has a separate output for alarm indication in case of a tank

running dry or if an overflow condition occurs.

8A SPDT/SPST relay output, NO/NC.

Sensitivity control by potentiometer level in 3 ranges.

Ordering Key

CLD4MA2DM24

Type _____
DIN rail mounting _____
Inputs _____
Function _____
Adjustment _____
Outputs _____
Relay versions _____
Power supply _____

Type Selection

Mounting	Relay	Ordering no. Supply: 24 VAC/DC	Ordering no. Supply: 115 VAC	Ordering no. Supply: 230 VAC
DIN-rail	SPDT + SPST	CLD4MA2DM24	CLD4MA2D115	CLD4MA2D230
11-p circular plug	2 SPST	CLP4MA2AM24	CLP4MA2A115	CLP4MA2A230

Specifications

Rated operational voltage (U_B)		
Pin 2 & 10	230	195 to 265 VAC, 45 to 65 Hz
	115	98 to 132 VAC, 45 to 65 Hz
Supply class 2	24	19.2 to 28.8 VAC/DC
Rated insulation voltage		<2.0 kVAC (rms)
Rated impulse withstand voltage		4 kV (1.2/50 μs) (line/neutral)
Rated operational power		
AC supply		5 VA
AC/DC supply		5 VA / 5 W
Delay on operate (t_v)		< 300 mS
Outputs		Make or break on rotary-switch
Rated insulation voltage		250 VAC (rms) (cont./elec.)
Relay Rating (AgCdO)		μ (micro gap)
Resistive loads	AC1	8 A / 250 VAC (2500 VA)
	DC1	1 A / 250 VDC (250 W)
		or 10 A / 25 VDC (250 W)
Small induc. Loads	AC15	0,4 A / 250 VAC
	DC13	0,4 A / 30 VDC
Mechanical life (typical)		≥ 30 x 10 ⁶ operations
Electrical life (typical)	AC1	@ 18'000 imp/h
		> 250'000 operations
Level probe supply		Max. 5 VAC
Level probe current		Max. 2 mA
Sensitivity		250Ω to 500KΩ
		Factory settings standard range "S" 100KΩ
Ranges L (Low sensitivity)		250 Ω to 5 KΩ, C _F * = 4.7 nF
Ranges S (Standard sensitivity)		5 KΩ to 100 KΩ, C _F * = 2.2 nF
Ranges H (High sensitivity)		50 KΩ to 500 KΩ, C _F * = 1.0 nF

Dielectric voltage		>2.0 KVAC (rms) (contacts / electronics)
Rated impulse withstand volt.		4 kV (1.2/50 μs) (contacts / electronics) (IEC 664)
Operating frequency (f)		
Relay output		0.5 HZ
Response time		
OFF-ON (t _{on})		1 s
ON-OFF (t _{off})		1 s
Environment		
Overvoltage category		III (IEC 60664)
Degree of protection		IP 20 (IEC 60529, 60947-1)
Pollution degree		2 (IEC 60664/60664A, 60947-1)
Temperature		
Operating		-20° to +50°C (-4° to +122°F)
Storage		-50° to +85°C (-58° to +185°F)
Housing material	CLP	NORYL PPO, light grey
	CLD	ABS VO, light grey
Screw type		M3
Tightening torque min/max		0.4Nm/0.8Nm
Weight		
AC supply		200 g
AC/DC supply		125 g
UL Approvals		cURus
		UL508, UL325, CSA-C22.2 No.247
CE marking		Yes

*C_F = maximum Cable Capacitance

Specifications are subject to change without notice (14.12.2015)




Mode of Operation

Connection cable
2, 3, 4 or 5 conductor PVC cable, normally screened. Cable length: max. 100 m. The resistance between the cores and the ground must be at least 500k. Normally, it is recommended to use a screened cable between probe and controller, e.g. where the cable is placed in parallel to the load cables (mains). The screen has to be connected to Y5 (reference).

Example 1
The diagram shows the level control connected as max. and min. control, i.e. registration of 2 levels + 2 alarm levels. The relays


react to the low current created when the electrodes are in contact with the liquid. The reference (Ref) must be connected to the container or if the container consists of a non-conductive material, to an additional electrode. (To be connected to pin Y5). In the diagram this electrode is shown by the dotted line.)

The alarm outputs utilize alarm - and Y1 for LoLo alarm outputs.

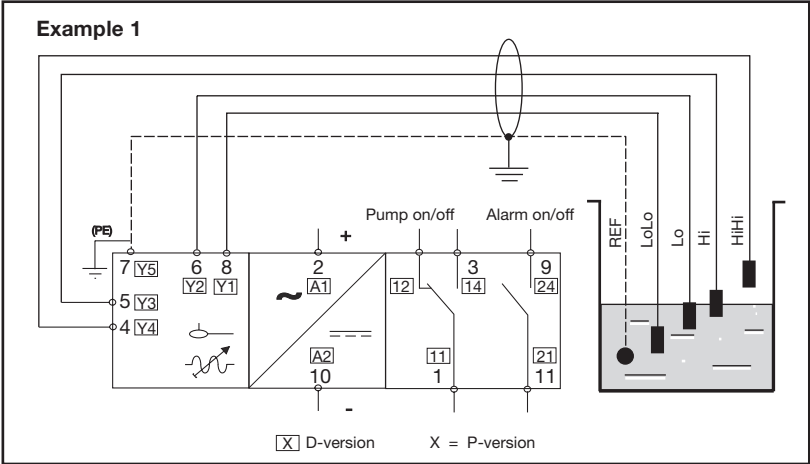


Operation Diagram

Function: Filling or Emptying
The Multifunction Controller can be used as a minimum-maximum control for two systems, a filling system and a emptying system, with the same kind of liquid to be measured and one common pump.

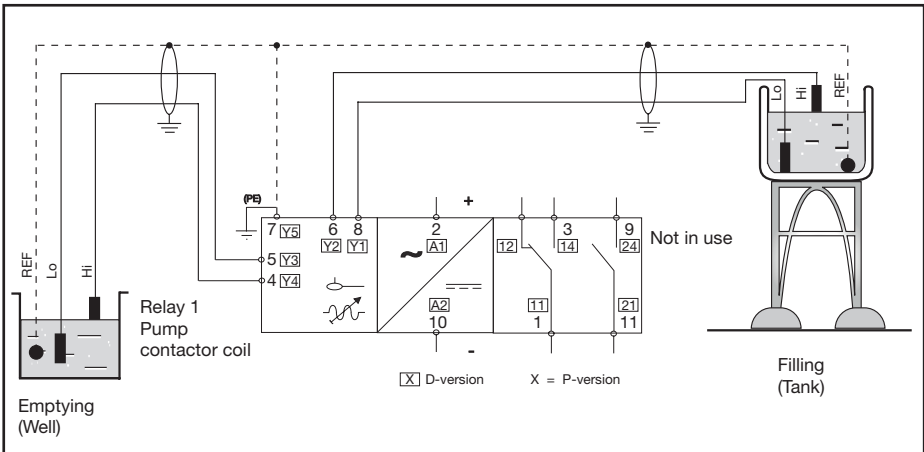


Tank-Well application (Filling and emptying)

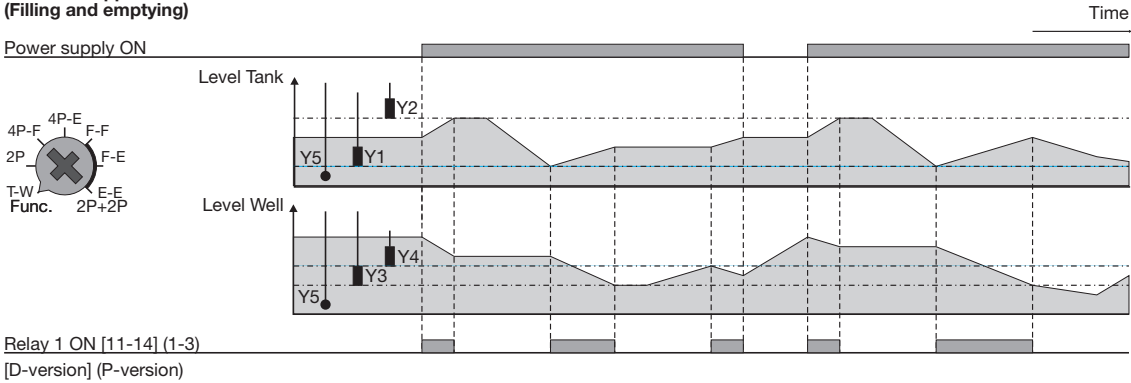

Operation Diagram


Function: Direct input- output

The Multifunction Controller can be used as direct input/ output, where each of the two inputs (electrodes) controls an individual relay output:
Electrode no. 1 = Relay no. 1
Electrode no. 2 = Relay no. 2.

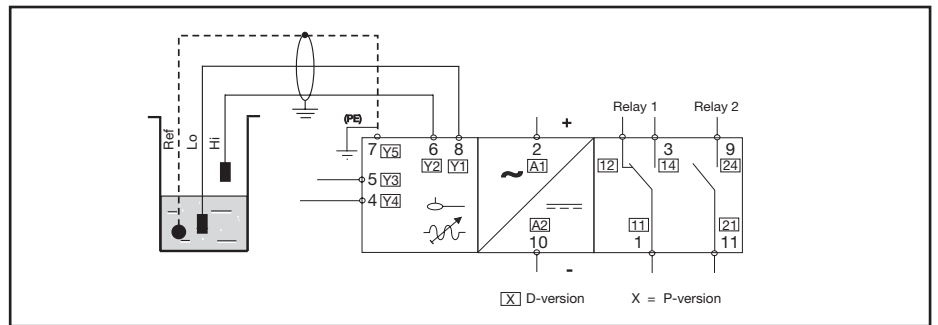


2-Probe (Direct Input to output)

Power supply ON

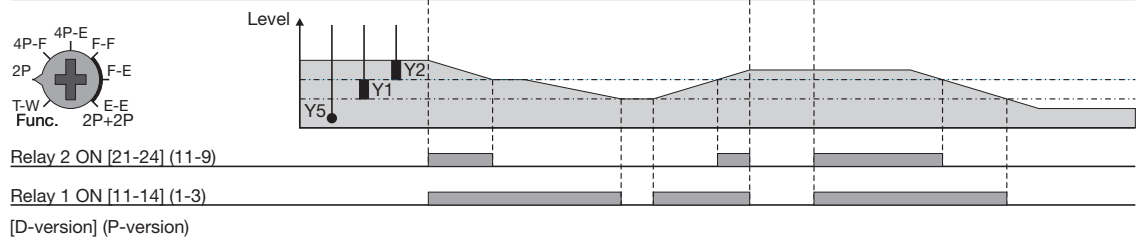


Function: Filling or Emptying with high and low alarms

The Multifunction Controller can be used as a minimum-maximum control filling or emptying system, with HiHi and LoLo Alarm output.

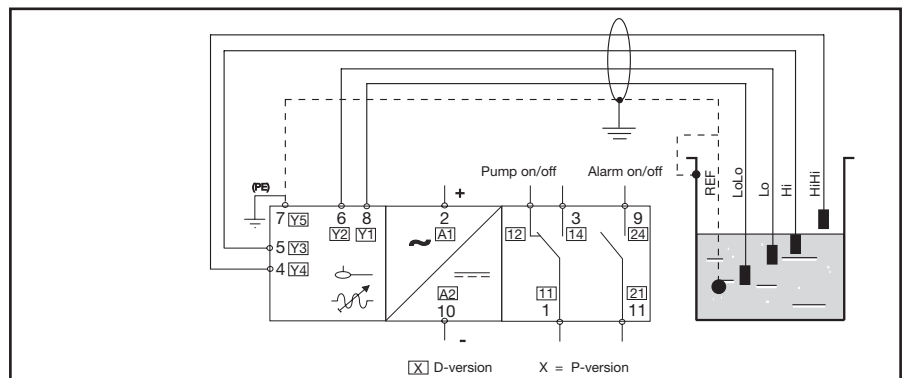


4-Probe Filling (Low and High alarm)

Power supply ON

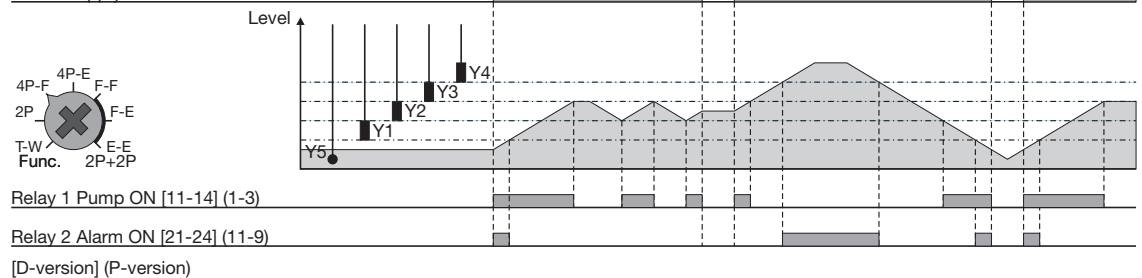

4-Probe Emptying (Low and High alarm)


Power supply ON

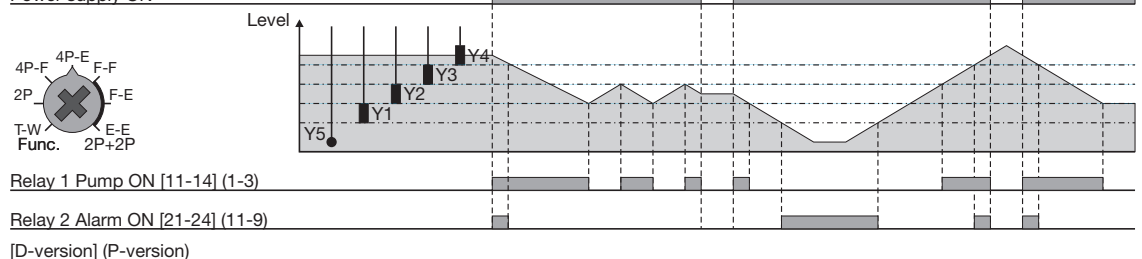




Operation Diagram



Function: Filling or Emptying
The Multifunction Controller can be used as a minimum-maximum control for up to two individual systems, with the same kind of liquid to be measured.

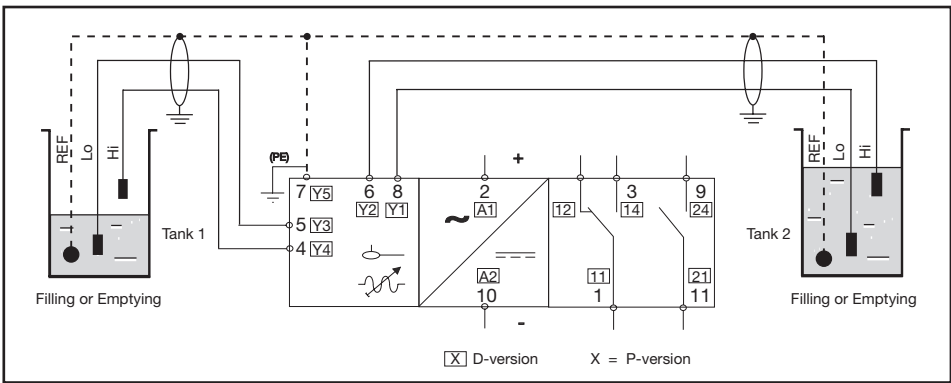


2 Individual systems
(Filling and/or emptying)

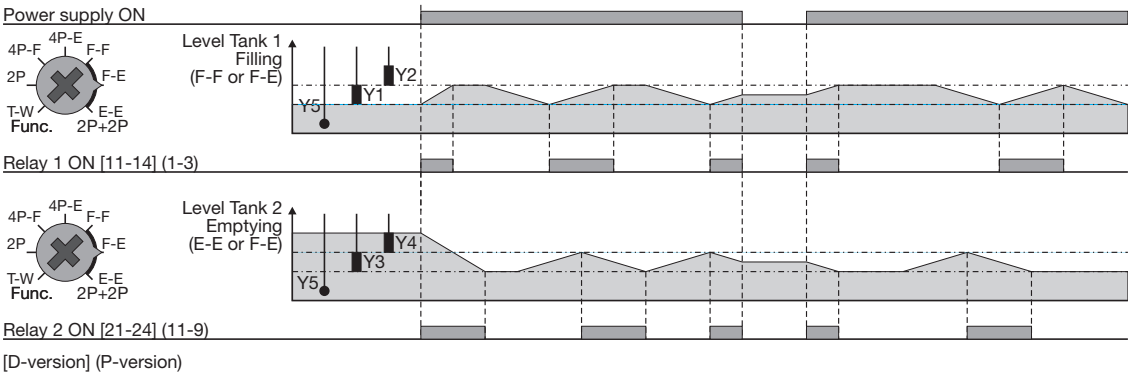

Wiring Diagram

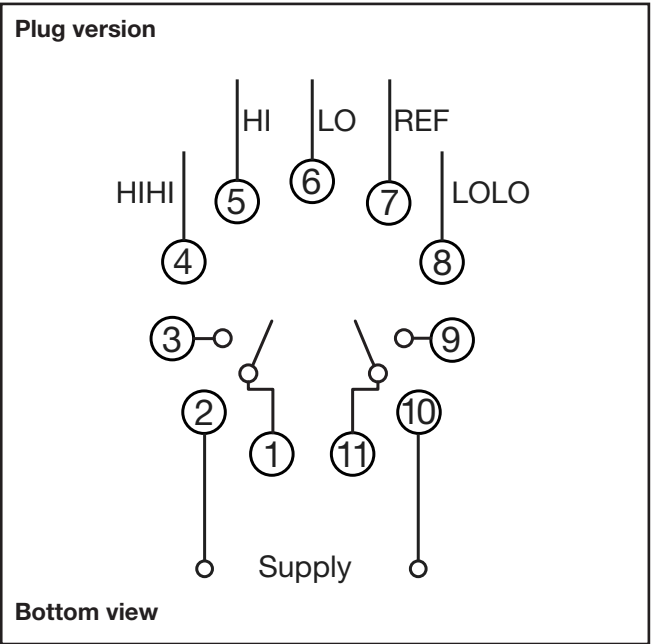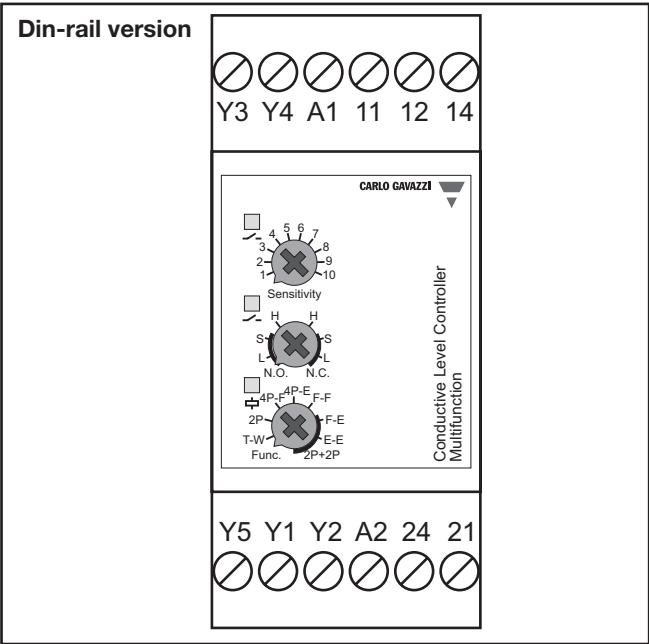

Dimension Drawings

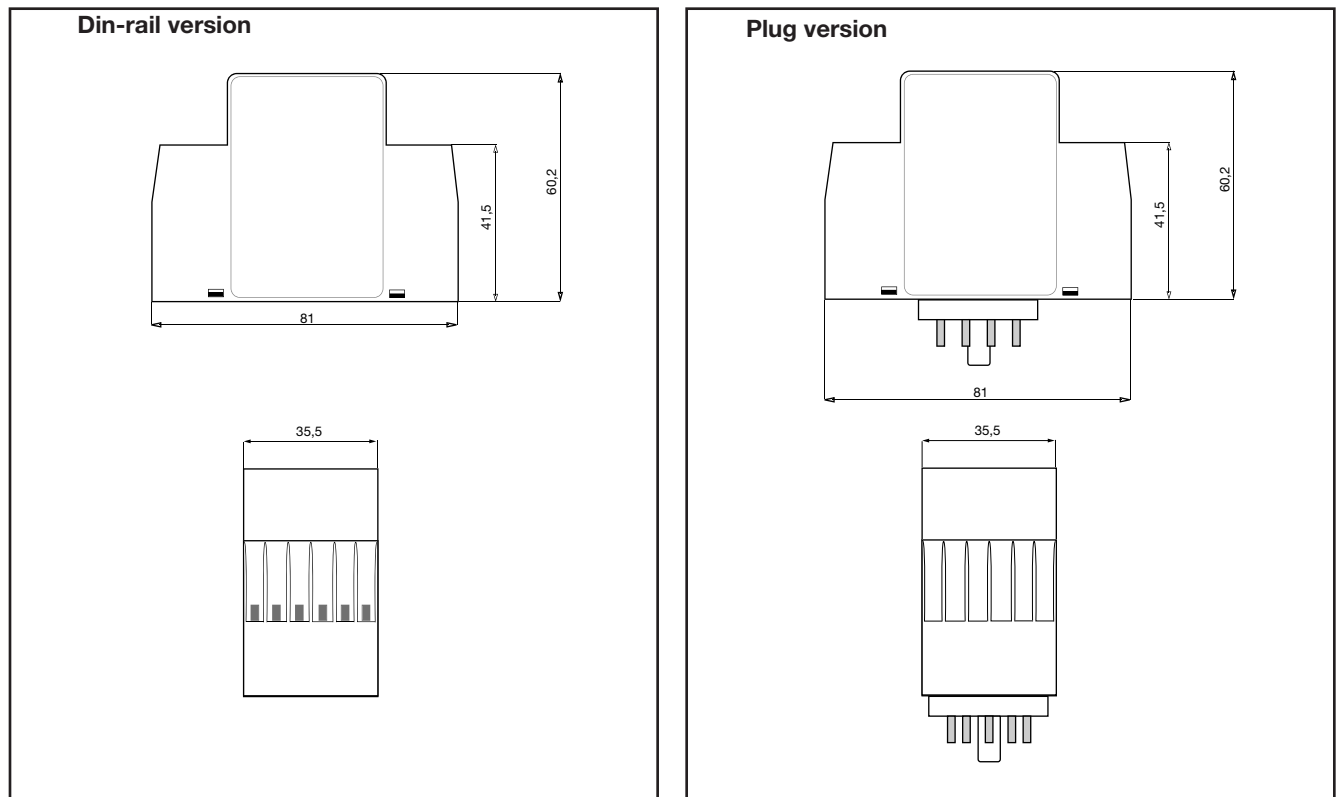

Accessories

- 11 pole circular socket ZPD11
- Retaining spring HF

Delivery Contents

- Amplifier
- Packaging: Carton box
- Manual

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Carlo Gavazzi:](#)

[CLP4MA2A230](#) [CLP4MA2A115](#) [CLD4MA2D230](#) [CLD4MA2D115](#) [CLP4MA2AM24](#) [CLD4MA2DM24](#)