
# Monitoring Relays 1-Phase Voltage selection Type DUA55



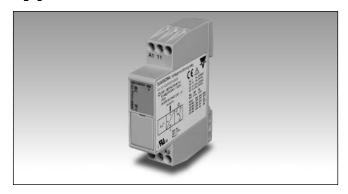

- Detects if voltage is at the desired level (± 10% or ±15%)
- Measures its own power supply
- Wide power supply range: 208 to 480 VAC (±15%)
- Output: 5 A SPDT relay normally energized
- For mounting on DIN-rail in accordance with DIN/EN 50 022
- 17.5 mm DIN-rail housing (DIN 43880)
- LED indication for relay and power supply ON

#### **Product Description**

1-Phase relay for detection of incorrect mains voltage. This unit allows to stop incorrect power supply voltage when different from the desired one.

Power supply range from

208 to 480 VAC plus selection of the different possible nominal voltages. For mounting on DIN-rail. Housing 17.5 mm wide suitable both for back and front panel mounting.

Ordering Key	<b>DUA 55 C M44</b>
Housing	
Function	
Type	
Item number	
Output	
Power supply	

#### **Type Selection**

Mounting	Output		
DIN-rail	SPDT		

#### Supply: 208 to 480 VAC

**DUA 55 C M44** 

#### **Input Specifications**

Input	Terminals A1, A2
L, N	Measures its own supply
Measuring range	177 to 550 VAC

#### **Output Specifications**

Output	SPDT relay, N.E.		
Rated insulation voltage	250 VAC		
Contact ratings (AgSnO <sub>2</sub> ) Resistive loads AC 1 DC 12 Small inductive loads AC 15 DC 13	μ 5 A @ 250 VAC 5 A @ 24 VDC 2.5 A @ 250 VAC 2.5 A @ 24 VDC		
Mechanical life	≥ 30 x 10 <sup>6</sup> operations		
Electrical life	$\geq 10^5$ operations (at 8 A, 250 V, cos $\phi$ = 1)		
Operating frequency	≤ 7200 operations/h		
Dielectric strength Dielectric voltage Rated impulse withstand volt.	≥ 2 kVAC (rms) 4 kV (1.2/50 µs)		

#### **Supply Specifications**

Power supply	Overvoltage cat. III
Rated operational voltage	(IEC 60664, IEC 60038)
through terminals: A1, A2	208 to 480 VAC ± 15%,
	45 to 65 Hz
Rated operational power	6 VA @ 230 VAC, 50 Hz

## **General Specifications**

Reaction time Alarm ON delay Alarm OFF delay	< 100 ms < 300 ms	Environment Degree of protection Pollution degree	IP 20 2
Accuracy Temperature drift Repeatability	(15 min warm-up time) ± 1000 ppm/°C ± 0.5% on full scale	Operating temperature  @ Max. voltage, 50 Hz  @ Max. voltage, 60 Hz	-20 to +60°C, R.H. < 95% -20 to +50°C, R.H. < 95% -30 to +80°C, R.H. < 95%
Indication for Power supply ON Relay ON	LED, green LED, yellow	Storage temperature  Housing Dimensions Material	17.5 x 81 x 67.2 mm PA66 or Noryl
		Weight	Approx. 80 g



## **General Specifications (cont.)**

## **Mode of Operation**

Screw terminals	
Tightening torque	Max. 0.5 Nm
	acc. to IEC 60947
Product standard	EN 60255-6
Approvals	UL, CSA
CE Marking	L.V. Directive 2006/95/EC
	EMC Directive 2004/108/EC
EMC	
Immunity	According to EN 60255-26
•	According to EN 61000-6-2
Emissions	According to EN 60255-26
	According to EN 61000-6-3

DUA55 monitors its own 1- phase power supply. The relay operates when the monitored voltage is within the desired tolerance ( $\pm$  10% or  $\pm$  15%).


Voltage window
ON: ± 15 %

**Example**The relay monitors that the power supply is the correct one for the required equipment

#### Range setting


Select the proper nominal voltage level using DIP-switches as shown below.






Measuring range				
	SW2	SW3	SW4	
208 VAC	OFF	OFF	OFF	
220 VAC	OFF	OFF	ON	
230 VAC	OFF	ON	OFF	
240 VAC	OFF	ON	ON	

## **Operation Diagram**

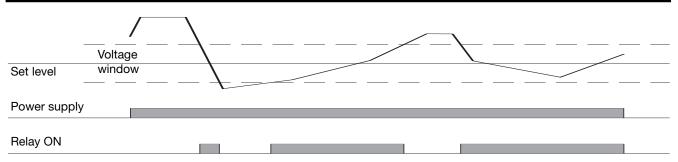




# **Wiring Diagram**

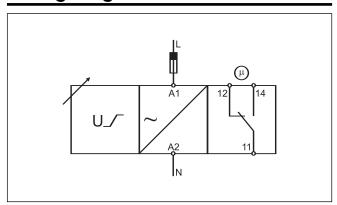

## **Dimensions**

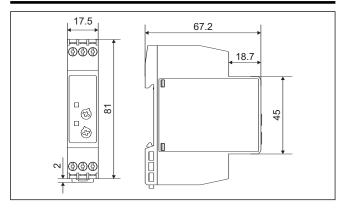

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Carlo Gavazzi: