

DIODE(THREE PHASES BRIDGE TYPE)

DF20AA120/160



UL;E76102 (M)

Power Diode Module **DF20AA** is designed for three phase full wave rectification, which has six diodes connected in a three phase bridge configuration. The mounting base of the module is electrically isolated from semiconductor elements for simple heatsink construction output DC current is 20Amp ($T_c=119^{\circ}\text{C}$) Repetitive peak reverse voltage is up to 1,600V.

- $T_{j\text{Max}}=150^{\circ}\text{C}$
- Isolated Mounting Base
- High reliability by unique glass passivation
- Easy Assemble by the #250 terminal Tab

(Applications)

AC. DC Moter Drive/AVR/Switching
—for three phase rectification

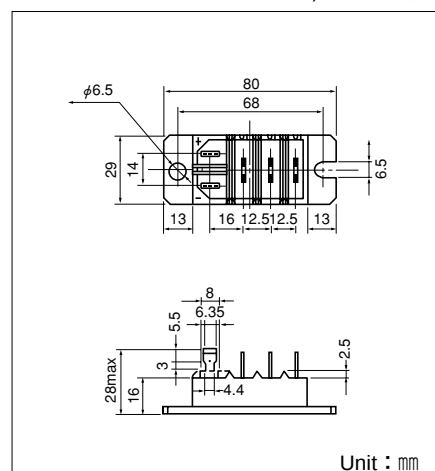

Maximum Ratings






($T_j=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Item	Ratings		Unit
		DF20AA120	DF20AA160	
V_{RRM}	Repetitive Peak Reverse Voltage	1200	1600	V
V_{RSM}	Non-Repetitive Peak Reverse Voltage	1300	1700	V

Symbol	Item		Conditions	Ratings	Unit
I_D	Output current (D.C.)		Three phase. full wave. $T_c=119^{\circ}\text{C}$	20	A
I_{FSM}	Surge Forward Current		1 cycle, 50/60Hz, peak value, non-repetitive	220/240	A
T_j	Junction Temperature			-40 to $+150$	$^{\circ}\text{C}$
T_{stg}	Storage Temperature			-40 to $+125$	$^{\circ}\text{C}$
V_{ISO}	Isolation Breakdown Voltage (R.M.S.)		Main Terminal to case 1minute	2500	V
	Mounting Torque	Mounting (M6)	Recommended Value 2.5-3.9 (25-40)	4.7 (48)	N·m
		Terminal	Tub Terminal # 250	—	(kgf·cm)
	Mass		Typical Value	90	g

Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
I_{RRM}	Repetitive Peak Reverse Current, max.	$T_j=150^{\circ}\text{C}$ at V_{RRM}	3.0	mA
V_{FM}	Forward Voltage Drop, max.	$I_{FM}=20\text{A}$, $T_j=25^{\circ}\text{C}$ Inst. measurement	1.25	V
$R_{th(j-c)}$	Thermal Impedance, max.	Junction to case	0.6	$^{\circ}\text{C/W}$

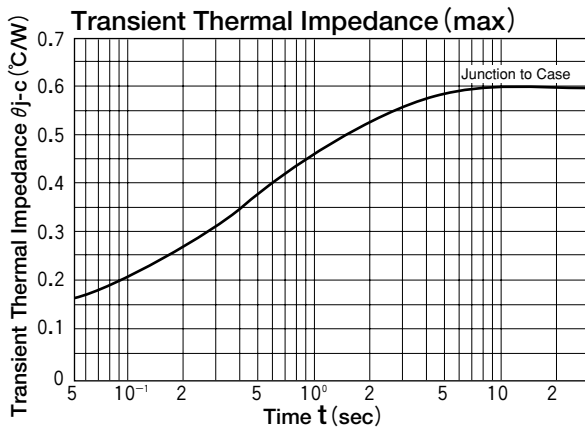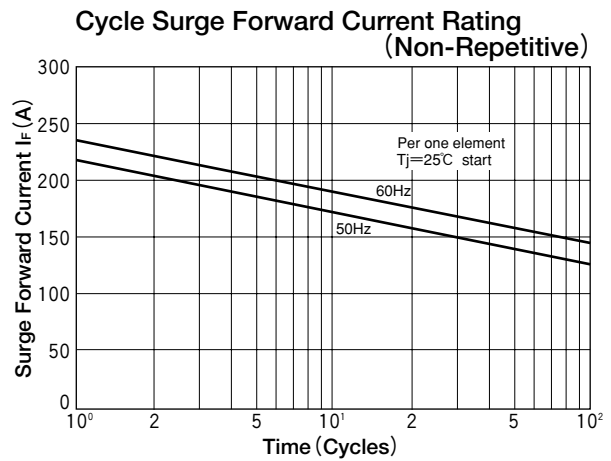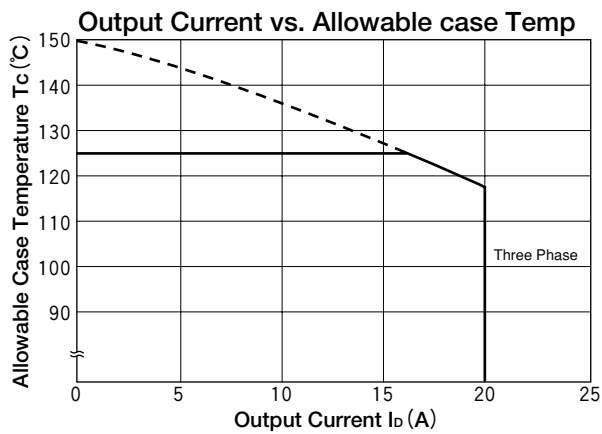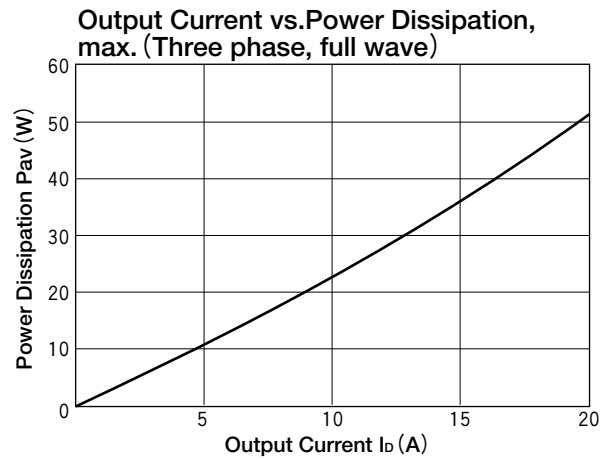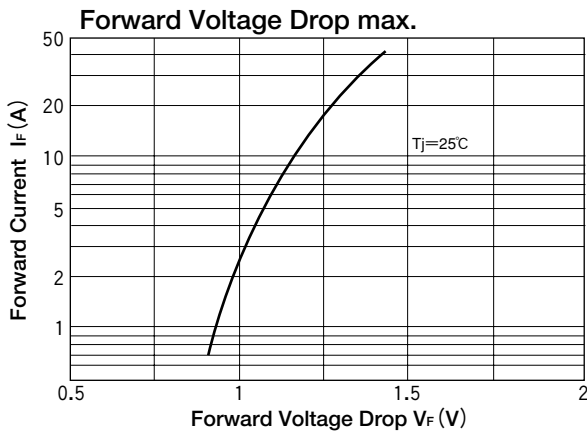

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[SanRex:](#)

[DF20AA120](#) [DF20AA160](#)