

DATA SHEET

BAS19W~BAS21W

SURFACE MOUNT SWITCHING DIODES

VOLTAGE 120-250 Volts **POWER** 200mWatts

SOT-323 Unit : inch(mm)

FEATURES


- Fast switching speed.
 - Surface mount package Ideally Suited for Automatic insertion
 - Electrically Identical to Standard JEDEC
 - High Conductance
 - Lead free in comply with EU RoHS 2002/95/EC directives.
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

Case: SOT-323, Plastic

Terminals: Solderable per MIL-STD-750, Method 2026

Approx. Weight: 0.0002 ounces, 0.005 grams

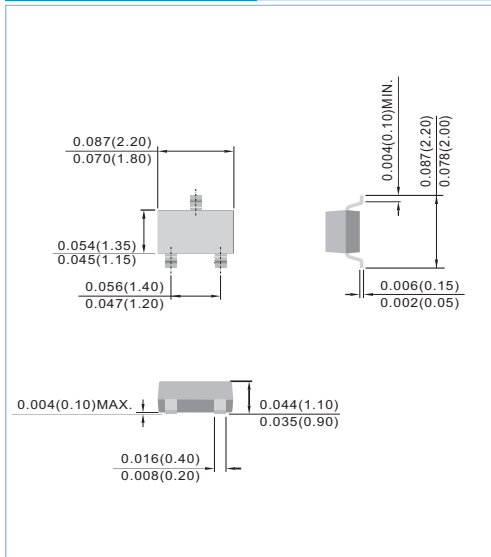

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified. For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	BAS19W	BAS20W	BAS21W	UNITS
Marking Code		A8	A80	A82	
Reverse Voltage	V_R	100	150	200	V
Peak Reverse Voltage	V_{RM}	120	200	250	V
Rectified Current (Average), Half Wave Rectification with Resistive Load and $f \geq 50$ Hz	I_D	200			mA
Peak Forward Surge Current, 1.0us	I_{FSM}	4.0			A
Power Dissipation Derate Above 25°C	P_{TOT}	200			mW
Maximum Forward Voltage at 0.1A	V_F	1.0			V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_J = 25^\circ\text{C}$	I_R	0.1			uA
Typical Junction Capacitance (Notes1)	C_J	5.0			pF
Maximum Reverse Recovery (Notes2)	T_{RR}	50			ns
Typical Thermal Resistance	$R_{\theta JA}$	625			°C / W
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150			°C

NOTE:

1. C_J at $V_R=0$, $f=1\text{MHz}$

2. From $I_F=10\text{mA}$ to $I_R=1\text{mA}$, $V_R=6\text{Volts}$, $R_L=100\Omega$



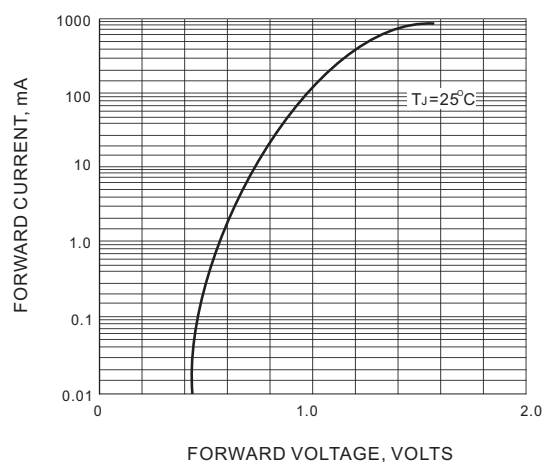


FIG. 1-TYPICAL FORWARD CHARACTERISTIC

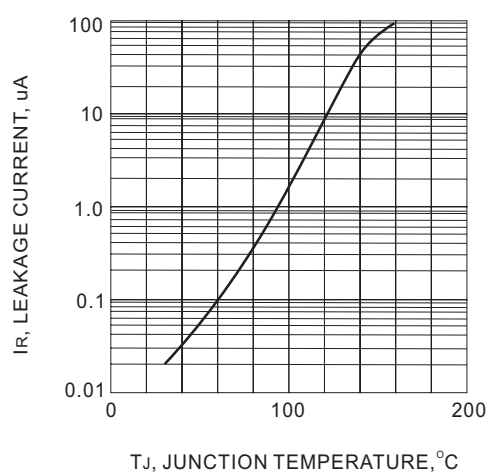


Fig.2 LEAKAGE CURRENT vs JUNCTION TEMPERATURE

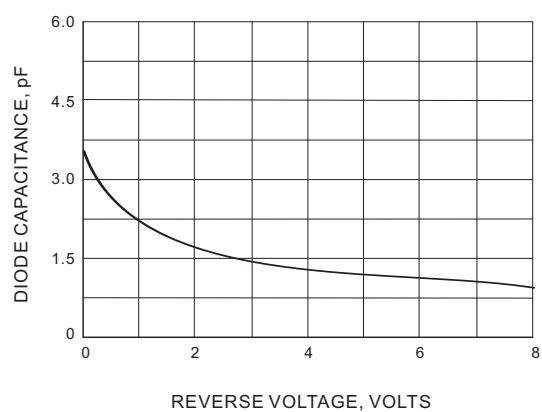


FIG. 3 TYPICAL JUNCTION CAPACITANCE


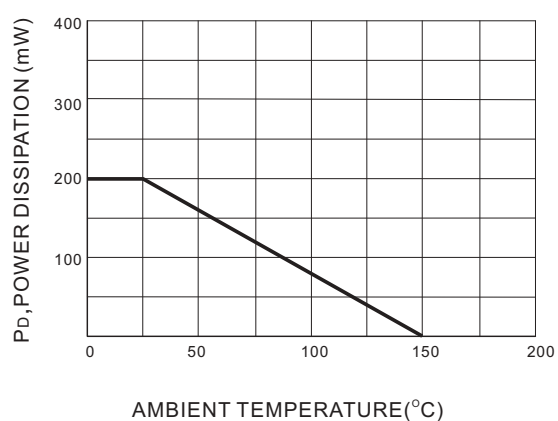


FIG. 4 POWER DERATING CURVE

MOUNTING PAD LAYOUT

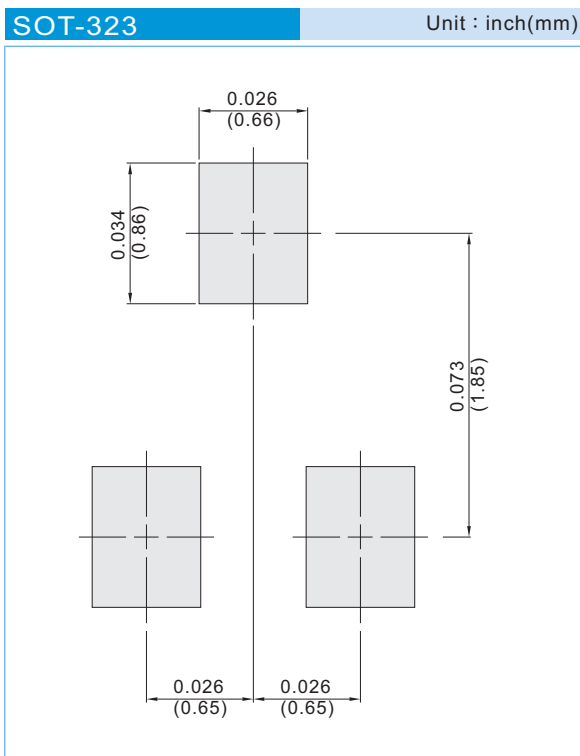

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2012

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panjit:](#)

[BAS21W_R1_00001](#) [BAS21W_R1_10001](#) [BAS21W_R2_00001](#) [BAS21W_R2_10001](#)