



SUPER FAST RECOVERY RECTIFIER

VOLTAGE 50 to 600 Volt CURRENT 3 Ampere

FEATURES

- For surface mounted applications
- High temperature metallurgically bonded-no compression contacts as found in other diode-constructed rectifiers
- · Glass passivated junction
- · Easy pick and place
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

MECHANICAL DATA

• Case: JEDEC DO-214AA molded plastic

• Terminals : Solder plated, solderable per MIL-STD-750, Method 2026


• Polarity: Color band denotes cathode end

• Standard packaging: 12mm tape (EIA-481)

• Weight: 0.0032 ounces, 0.092 grams







MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	ER3AA	ER3BA	ER3CA	ER3DA	ER3EA	ER3GA	ER3JA	UNITS
Maximum Recurrent Peak Reverse Voltage		50	100	150	200	300	400	600	V
Maximum RMS Voltage		35	70	105	140	210	280	420	٧
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	V
Maximum Average Forward Current	I _{F(AV)}	3						А	
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	80						А	
Maximum Forward Voltage at 3A		0.95 1.25 1.7				1.7	٧		
Maximum DC Reverse Current at Rated DC Blocking Voltage		1					μА		
Maximum Reverse Recovery Time (Notes 3)	t _{rr}	35					ns		
Typical Junction Capacitance Measured at 1MHz and applied V _R =4V	C _J	45				pF			
Typical Thermal Resistance (Notes 2) (Notes 1)	R _{eJA} R _{eJC}	135 20					°C / W		
Operating and Storage Temperature Range		-55 to +150						°C	

NOTES:1. Mounted on a FR4 PCB, single-sided copper, with 100cm² copper pad area

- 2. Mounted on a FR4 PCB, single-sided copper, mini pad.
- 3. Reverse Recovery Test Conditions: I_F =0.5A , I_R =-1A I_r =-0.25A








Fig.1 Forward Current Derating Curve




Fig.2 Typical Junction Capacitance




Fig.3 Typical Reverse Characteristics




Fig.4 Typical Reverse Characteristics




Fig.5 Typical Reverse Characteristics




Fig.6 Typical Forward Characteristics








Fig.7 Typical Forward Characteristics





Fig.8 Typical Forward Characteristics





MOUNTING PAD LAYOUT

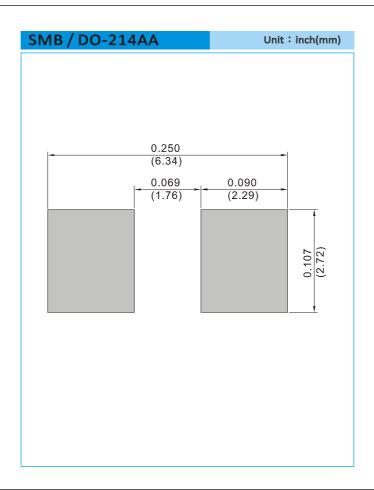

ORDER INFORMATION

• Packing information

T/R - 3K per 13" plastic Reel

T/R - 0.8K per 7" plastic Reel





Part No_packing code_Version

ER3AA_R1_00001 ER3AA_R2_00001

For example:



Packing Code XX					Version Code XXXXX				
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code			
Tape and Ammunition Box (T/B)	Α	N/A	0	HF	0	serial number			
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number			
Bulk Packing (B/P)	В	13"	2						
Tube Packing (T/P)	Т	26mm	X						
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y						
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U						
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D						





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties
 of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
 Customers are responsible in comprehending the suitable use in particular applications.
 Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panjit:

ER3EA_R1_00001