



### SURFACE MOUNT SUPERFAST RECTIFIER

VOLTAGE 50 to 600 Volt CURRENT 1 Ampere


### **FEATURES**


- For surface mounted applications in order to optimize board space
- · Easy pick and place
- Superfast recovery times for high efficiency
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- · Glass passivated junction
- Lead free in compliance with EU RoHS2.0 (2011/65/EU & 2015/865/EU directive)
- Green molding compound as per IEC61249 Std. . (Halogen Free)

#### **MECHANICAL DATA**

- Case: SMA(W) molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Standard packaging: 12mm tape (EIA-481)
- Weight: 0.0023 ounce, 0.0679 gram





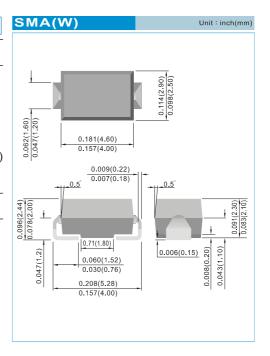

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.


| PARAMETER   | SYMBOL                               | ES1AWG        | ES1BWG | ES1CWG | ES1DWG | ES1EWG | ES1GWG | ES1JWG | UNITS  |
|---|--------------------------------------|---------------|--------|--------|--------|--------|--------|--------|--------|
| Marking   |                                      | ES1A          | ES1B   | ES1C   | ES1D   | ES1E   | ES1G   | ES1J   |        |
| Maximum Recurrent Peak Reverse Voltage  | V <sub>RRM</sub>                     | 50            | 100    | 150    | 200    | 300    | 400    | 600    | V      |
| Maximum RMS Voltage   | V <sub>RMS</sub>                     | 35            | 70     | 105    | 140    | 210    | 280    | 420    | V      |
| Maximum DC Blocking Voltage   | V <sub>DC</sub>                      | 50            | 100    | 150    | 200    | 300    | 400    | 600    | V      |
| Maximum Average Forward Current   | I <sub>F(AV)</sub>                   | 1             |        |        |        |        |        |        | А      |
| Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load | I <sub>FSM</sub>                     | 30            |        |        |        |        |        |        | А      |
| Maximum Forward Voltage at 1A   | V <sub>F</sub>                       | 0.95 1.25 1.7 |        |        |        |        | 1.7    | V      |        |
| Maximum DC Reverse Current at Rated DC Blocking<br>Voltage                          | I <sub>R</sub>                       | 1             |        |        |        |        |        |        | μΑ     |
| Typical Junction Capacitance  | C <sub>J</sub>                       | 18            |        |        |        |        |        |        | pF     |
| Typical Thermal Resistance (Note 1) (Note 2)  | R <sub>eja</sub><br>R <sub>ejl</sub> | 150<br>22     |        |        |        |        |        |        | °C / W |
| Maximum Reverse Recovery Time (Note 3)  | t <sub>rr</sub>                      | 35            |        |        |        |        |        | ns     |        |
| Operating Junction and Storage Temperature Range                                    | T <sub>J</sub> ,T <sub>STG</sub>     | -55 to +150   |        |        |        |        | °C     |        |        |

#### NOTES


- 1. Mounted on a FR4 PCB, single-sided copper, mini pad.
- 2. Mounted on a FR4 PCB, single-sided copper, with 76.2 x 114.3mm copper pad area.
- 3.Reverse Recovery Tset Conditions: I<sub>F</sub>=0.5A,I<sub>R</sub>=-1A,Irr=-0.25A.






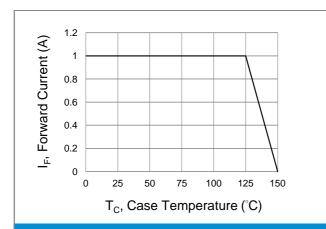


**Fig.1 Forward Current Derating Curve** 

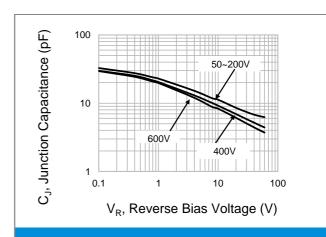

**Fig.2 Typical Junction Capacitance** 

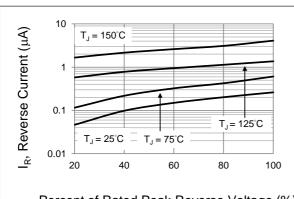

Percent of Rated Peak Reverse Voltage (%)

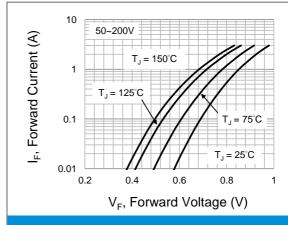

**Fig.4 Typical Forward Characteristics** 




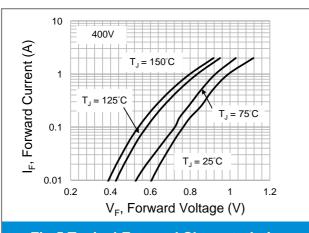


Fig.5 Typical Forward Characteristics




**Fig.6 Typical Forward Characteristics** 



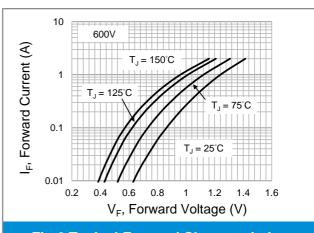

### MOUNTING PAD LAYOUT

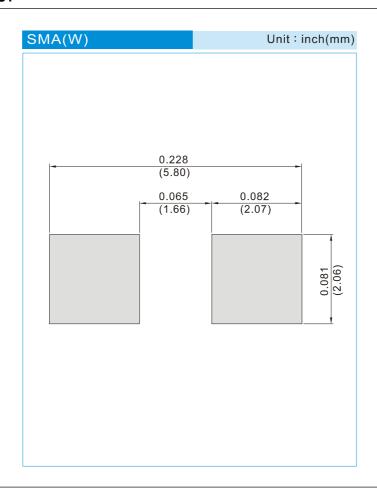

### **ORDER INFORMATION**

• Packing information

T/R - 7.5K per 13" plastic Reel

T/R - 1.8K per 7" plastic Reel






### Part No\_packing code\_Version

ES1AWG\_R1\_00001 ES1AWG\_R1\_10001 ES1AWG\_R2\_00001 ES1AWG\_R2\_10001

### For example:

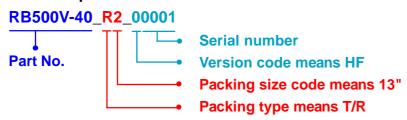

| Packing Code XX                      |                      |                                   |                      |            | Version Code XXXXX   |                                       |  |  |
|--------------------------------------|----------------------|-----------------------------------|----------------------|------------|----------------------|---------------------------------------|--|--|
| Packing type                         | 1 <sup>st</sup> Code | Packing size code                 | 2 <sup>nd</sup> Code | HF or RoHS | 1 <sup>st</sup> Code | 2 <sup>nd</sup> ~5 <sup>th</sup> Code |  |  |
| Tape and Ammunition Box (T/B)        | Α                    | N/A                               | 0                    | HF         | 0                    | serial number                         |  |  |
| Tape and Reel<br>(T/R)               | R                    | 7"                                | 1                    | RoHS       | 1                    | serial number                         |  |  |
| Bulk Packing<br>(B/P)                | В                    | 13"                               | 2                    |            |                      |                                       |  |  |
| Tube Packing<br>(T/P)                | Т                    | 26mm                              | X                    |            |                      |                                       |  |  |
| Tape and Reel (Right Oriented) (TRR) | Ø                    | 52mm                              | Y                    |            |                      |                                       |  |  |
| Tape and Reel (Left Oriented) (TRL)  | Ш                    | PANASERT T/B CATHODE UP<br>(PBCU) | U                    |            |                      |                                       |  |  |
| FORMING                              | F                    | PANASERT T/B CATHODE DOWN (PBCD)  | D                    |            |                      |                                       |  |  |





### **Disclaimer**

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties
  of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
   Customers are responsible in comprehending the suitable use in particular applications.
   Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panjit:

ES1JWG\_R1\_00001 ES1JWG\_R2\_00001