

MMBTA42W

NPN HIGH VOLTAGE TRANSISTOR

VOLTAGE 300 Volt **POWER** 150 mWatt

FEATURES

- NPN silicon, planar design
- Collector-emitter voltage $V_{CE} = 300V$
- Collector current $I_C = 500mA$
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

MECHANICAL DATA



Case: SOT-323, Plastic

Terminals: Solderable per MIL-STD-750, Method 2026

Approx. Weight: 0.005 gram

Marking: A4W

SOT-323 Unit : inch(mm)

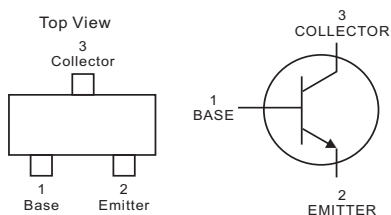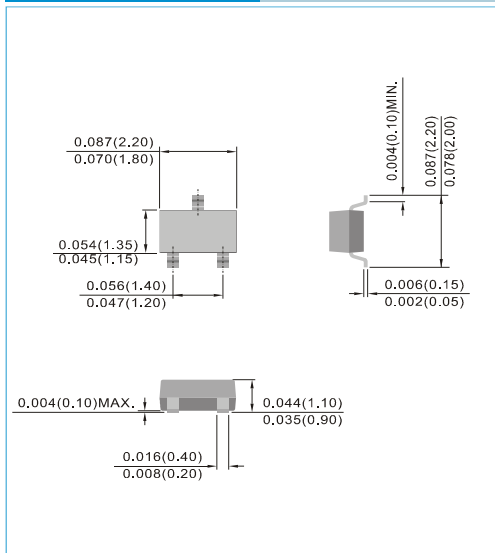

ABSOLUTE RATINGS

PARAMETER	SYMBOL	LIMIT	UNIT
Collector-base voltage	V_{CBO}	300	V
Collector-emitter voltage	V_{CEO}	300	V
Emitter-base voltage	V_{EBO}	6	V
Collector current (DC)	I_C	500	mA
Maximum power dissipation (note1)	P_D	150	mW
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150	°C

Note : 1.Mounted on an FR4 PCB, single-sided copper, mini pad.



MMBTA42W

THERMAL CHARACTERISTICS

PARAMETER	CONDITIONS	SYMBOL	VALUE	UNIT
Thermal resistance from junction to ambient	note 1	$R_{\theta JA}$	550	$^{\circ}\text{C/W}$





Note : 1. Mounted on an FR4 PCB, single-sided copper, mini pad.

CHARACTERISTICS

$T_{AMB}=25^{\circ}\text{C}$ unless otherwise specified

PARAMETER	CONDITIONS	SYMBOL	MIN.	MAX.	UNIT
Collector-emitter breakdown voltage	$I_C=1\text{mA}; I_B=0$	$V_{(BR)CEO}$	300	-	V
Collector-base breakdown voltage	$I_C=100\mu\text{A}; I_E=0$	$V_{(BR)CBO}$	300	-	V
Emitter-base breakdown voltage	$I_E=100\mu\text{A}; I_C=0$	$V_{(BR)EBO}$	6	-	V
Collector cut-off current	$I_E=0; V_{CB}=300\text{V}$	I_{CBO}	-	100	nA
Emitter cut-off current	$I_C=0; V_{EB}=6\text{V}$	I_{EBO}	-	100	nA
DC current gain	$V_{CE}=10\text{V};$ $I_C=1\text{mA}$	h_{FE}	25	-	-
	$I_C=10\text{mA}$		40	-	-
	$I_C=30\text{mA}$		40	-	-
Collector-emitter saturation voltage	$I_C=20\text{mA}; I_B=2\text{mA}$	$V_{CE(SAT)}$	-	0.5	V
Base-emitter saturation voltage	$I_C=20\text{mA}; I_B=2\text{mA}$	$V_{BE(SAT)}$	-	0.9	V
Collector capacitance	$I_E=0; V_{CB}=20\text{V};$ $f=1\text{MHz}$	C_{CB}	-	3	pF
Transition frequency	$I_C=10\text{mA}; V_{CE}=20\text{V};$ $f=100\text{MHz}$	f_T	50	-	MHz

MMBTA42W

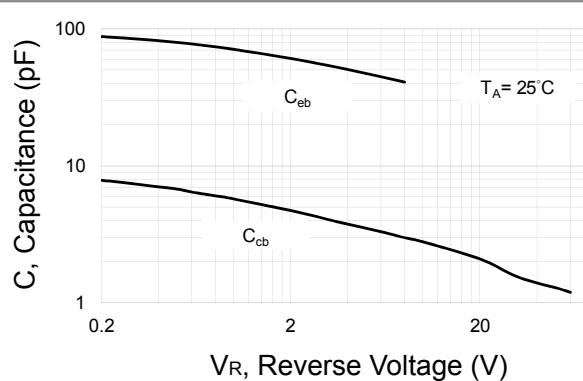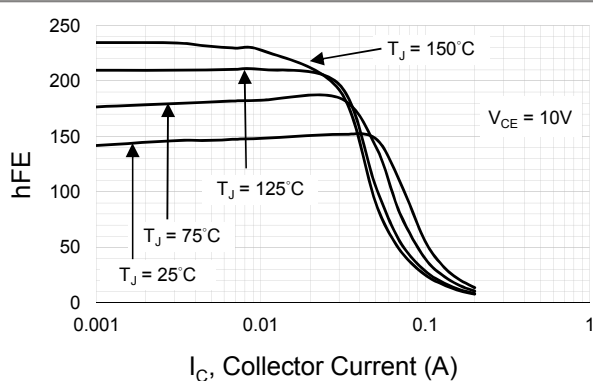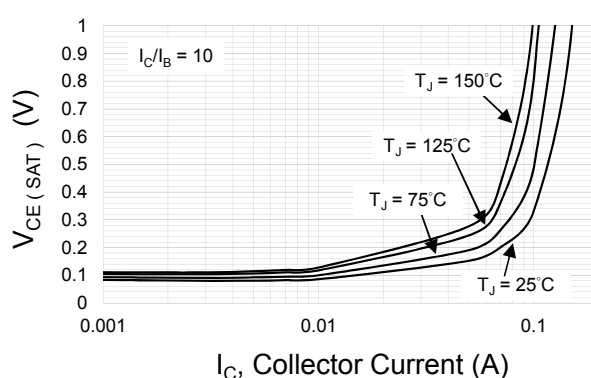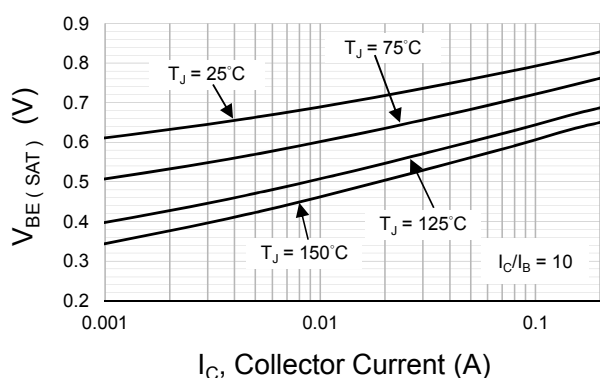


MMBTA42W

MOUNTING PAD LAYOUT

SOT-323

Unit : inch(mm)

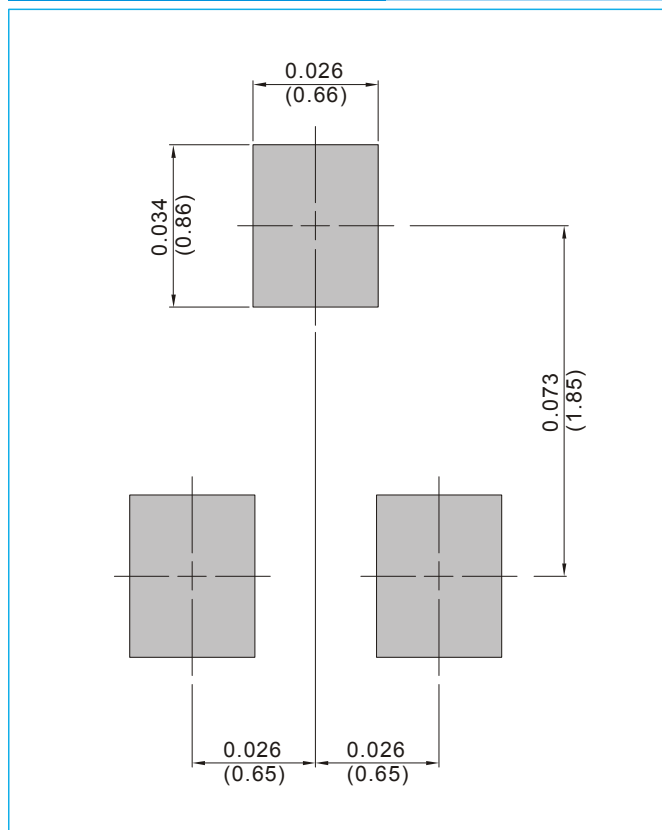

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel

MMBTA42W

Part No_packing code_Version

MMBTA42W_R1_00001

MMBTA42W_R2_00001

For example :

RB500V-40_R2_00001



Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



MMBTA42W

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panjit:

[MMBTA42W_R2_00001](#) [MMBTA42W_R1_00001](#)