

PJA138L

60V N-Channel Enhancement Mode MOSFET

Voltage	60 V	Current	250mA
----------------	-------------	----------------	--------------

Features


- $R_{DS(ON)}$, $V_{GS}@10V$, $I_D@250mA < 4.2\Omega$
- $R_{DS(ON)}$, $V_{GS}@4.5V$, $I_D@100mA < 5\Omega$
- $R_{DS(ON)}$, $V_{GS}@2.5V$, $I_D@50mA < 7\Omega$
- Advanced Trench Process Technology
- ESD Protected
- Specially Designed for Relay driver, Speed line drive, etc.
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case : SOT-23 Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.0003 ounces, 0.0084 grams
- Marking: A8L

SOT-23

Unit : inch(mm)

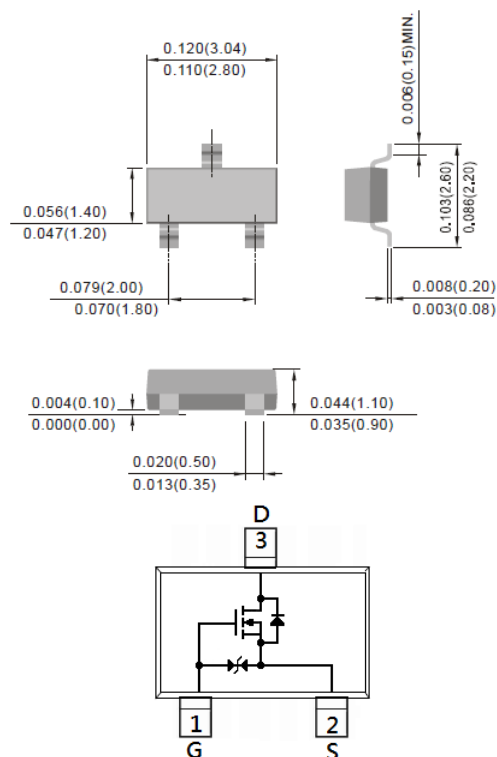

Maximum Ratings and Thermal Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER		SYMBOL	LIMIT	UNITS
Drain-Source Voltage		V _{DS}	60	V
Gate-Source Voltage		V _{GS}	±20	V
Continuous Drain Current		I _D	250	mA
Pulsed Drain Current		I _{DM}	1000	mA
Power Dissipation	T _A =25°C	P _D	500	mW
	Derate above 25°C		4	mW/°C
Operating Junction and Storage Temperature Range		T _J , T _{STG}	-55~150	°C
Typical Thermal resistance		R _{θJA}	250	°C/W
- Junction to Ambient (Note 3)				

PJA138L

Electrical Characteristics (T_A=25°C unless otherwise noted)







PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Static						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250uA	60	-	-	V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250uA	0.8	1.2	1.5	V
Drain-Source On-State Resistance	R _{DS(on)}	V _{GS} =10V, I _D =250mA	-	2.5	4.2	Ω
		V _{GS} =4.5V, I _D =100mA	-	2.8	5	
		V _{GS} =2.5V, I _D =50mA	-	3.7	7	
		V _{GS} =1.8V, I _D =10mA	-	12	-	
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =60V, V _{GS} =0V	-	0.01	1	uA
Gate-Source Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	-	±1.0	±10	uA
Dynamic (Note 4)						
Total Gate Charge	Q _g	V _{DS} =15V, I _D =250mA, V _{GS} =4.5V (Note 1,2)	-	0.7	-	nC
Gate-Source Charge	Q _{gs}		-	0.33	-	
Gate-Drain Charge	Q _{gd}		-	0.2	-	
Input Capacitance	C _{iss}	V _{DS} =15V, V _{GS} =0V, f=1.0MHZ	-	15	-	pF
Output Capacitance	C _{oss}		-	8.4	-	
Reverse Transfer Capacitance	C _{rss}		-	4.2	-	
Turn-On Delay Time	t _{d(on)}	V _{DD} =10V, I _D =250mA, V _{GS} =10V, R _G =6Ω (Note 1,2)	-	7	-	ns
Turn-On Rise Time	t _r		-	22	-	
Turn-Off Delay Time	t _{d(off)}		-	21	-	
Turn-Off Fall Time	t _f		-	25	-	
Drain-Source Diode						
Maximum Continuous Drain-Source Diode Forward Current	I _S	---	-	-	250	mA
Diode Forward Voltage	V _{SD}	I _S =250mA, V _{GS} =0V	-	0.8	1.1	V

NOTES :

1. Pulse width ≤ 300us, Duty cycle ≤ 2%
2. Essentially independent of operating temperature typical characteristics.
3. R_{ΘJA} is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. mounted on a 1 inch square pad of copper
4. Guaranteed by design, not subject to production testing.

PJA138L

TYPICAL CHARACTERISTIC CURVES

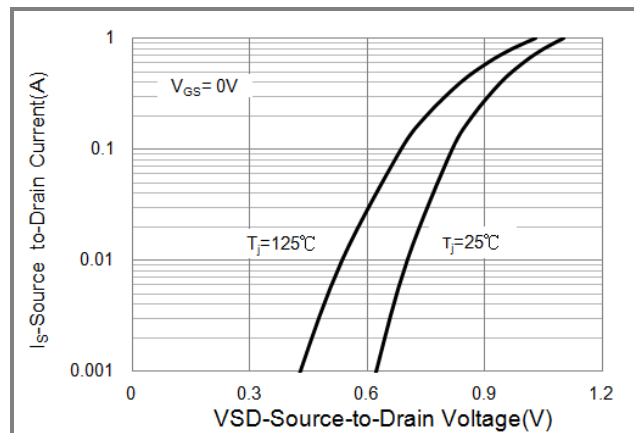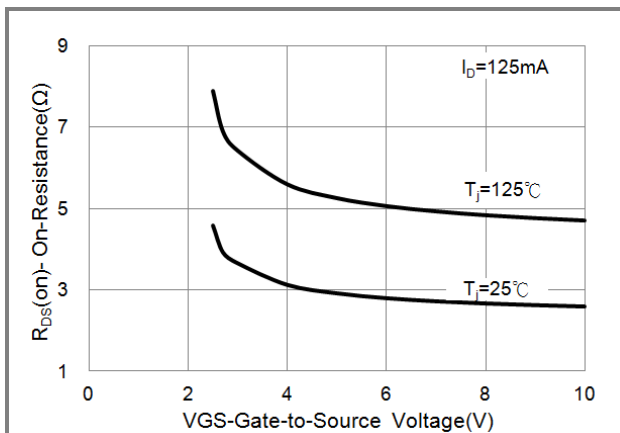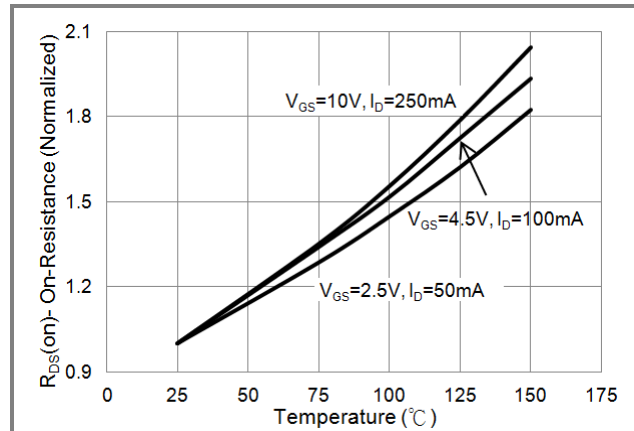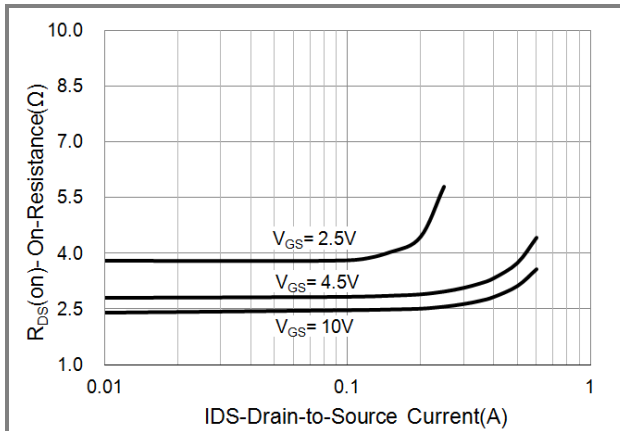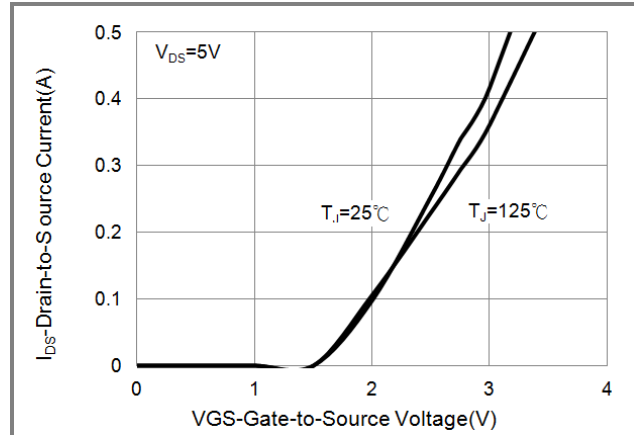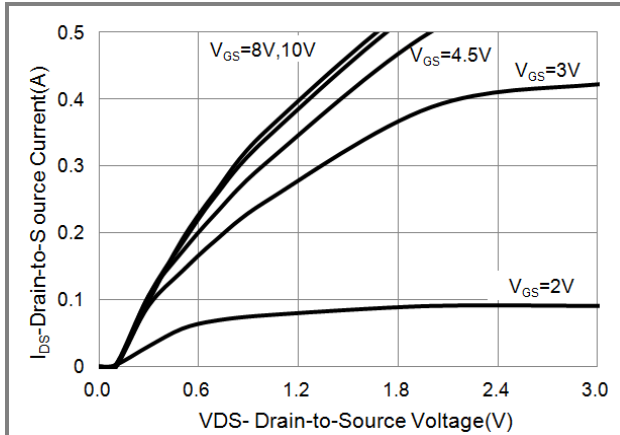

PJA138L

TYPICAL CHARACTERISTIC CURVES

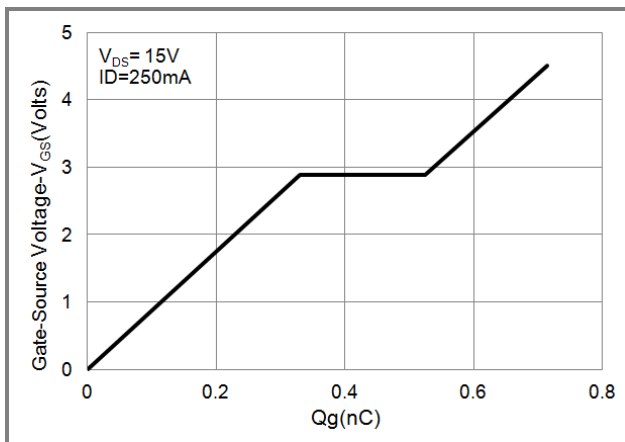


Fig.7 Gate-Charge Characteristics

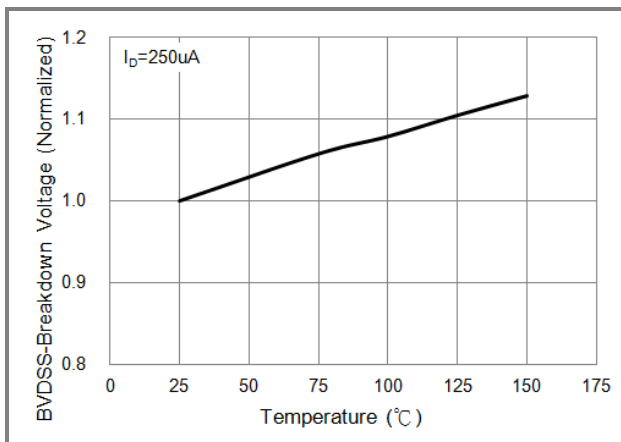


Fig.8 Breakdown Voltage Variation vs. Temperature

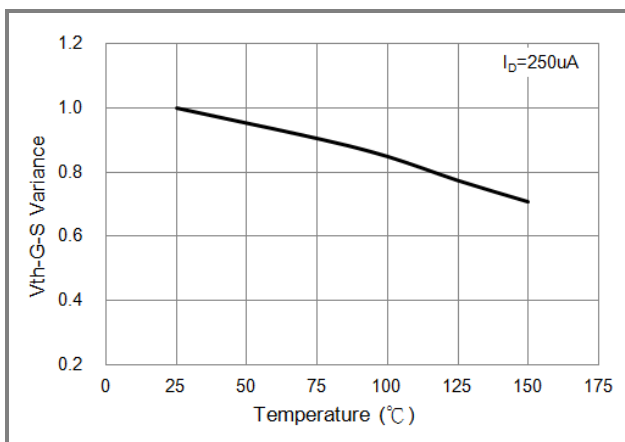


Fig.9 Threshold Voltage Variation with Temperature.

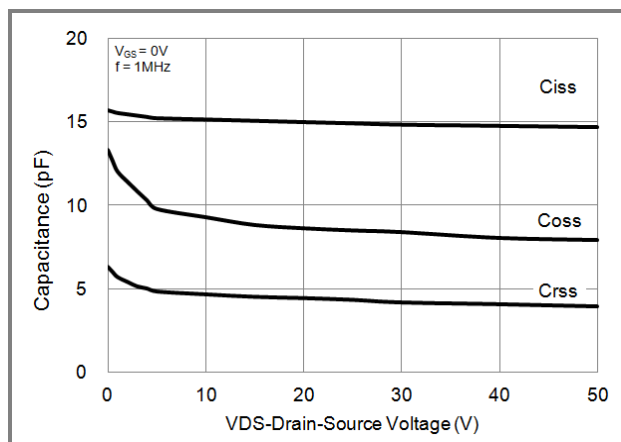



Fig.10 Capacitance vs. Drain-Source Voltage.

PJA138L

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
PJA138L	SOT-23	3K pcs / 7" reel	A8L
PJA138L	SOT-23	12K pcs / 13" reel	A8L

Mounting Pad Layout

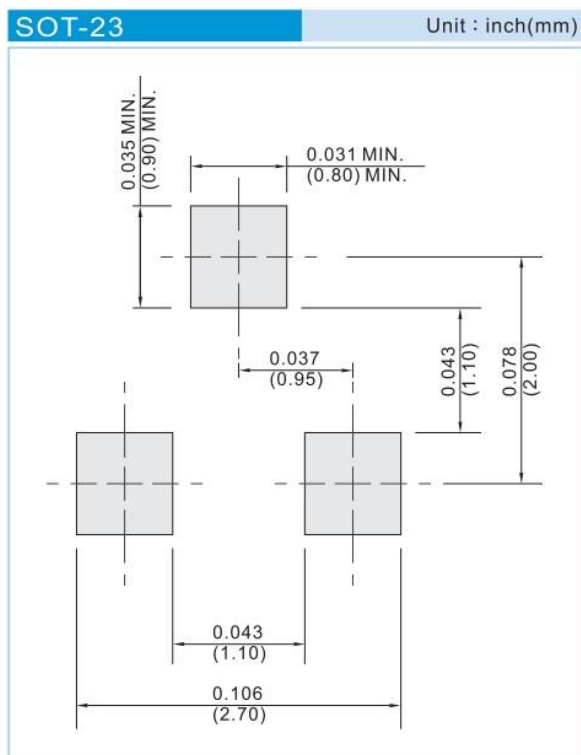

PJA138L

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panjit:](#)

[PJA138L_R1_00001](#) [PJA138L_R2_00001](#)