



### 30V P-Channel Enhancement Mode MOSFET


Voltage -30 V Current

#### **Features**

- RDS(ON) , VGS@-10V, ID@-2.6A<115mΩ</li>
- RDS(ON) , VGS@-4.5V, ID@-1.7A<150mΩ</li>
- Advanced Trench Process Technology
- Specially Designed for Switch Load, PWM Application, etc.
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

#### **Mechanical Data**

- Case: SOT-23 6L Package
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0005 ounces, 0.014 grams
- Marking: ST9

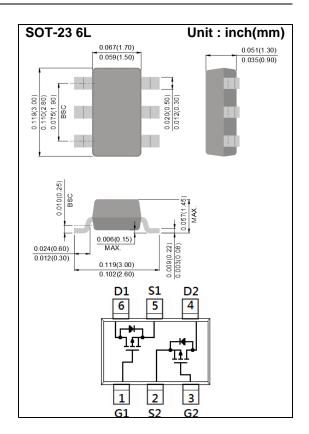

### Maximum Ratings and Thermal Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

-2.6A

PARAMETER		SYMBOL	LIMIT	UNITS
Drain-Source Voltage		V <sub>DS</sub>	-30	V
Gate-Source Voltage		V <sub>GS</sub>	<u>+</u> 20	V
Continuous Drain Current		I <sub>D</sub>	-2.6	Α
Pulsed Drain Current		I <sub>DM</sub>	-10.4	Α
Power Dissipation	T <sub>a</sub> =25°C	P <sub>D</sub>	1.25	W
	Derate above 25°C		10	mW/°C
Operating Junction and Storage Temperature Range		T <sub>J</sub> ,T <sub>STG</sub>	-55~150	°C
Typical Thermal Resistance - Junction to Ambient <sup>(Note 3)</sup>		ReJA	100	°C/W





# **Electrical Characteristics** (T<sub>A</sub>=25°C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Static			_			
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	V <sub>GS</sub> =0V, I <sub>D</sub> =-250uA	-30	-	-	V
Gate Threshold Voltage	$V_{GS(th)}$	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =-250uA	-1	-1.31	-2.1	V
Drain-Source On-State Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> =-10V, I <sub>D</sub> =-2.6A	-	93	115	mΩ
		V <sub>GS</sub> =-4.5V, I <sub>D</sub> =-1.7A	-	116	150	
Zero Gate Voltage Drain Current	IDSS	V <sub>DS</sub> =-30V, V <sub>GS</sub> =0V	-	-0.01	-1	uA
Gate-Source Leakage Current	Igss	V <sub>GS</sub> = <u>+</u> 20V, V <sub>DS</sub> =0V	-	<u>+</u> 10	<u>+</u> 100	nA
Dynamic						
Total Gate Charge	$Q_g$	V <sub>DS</sub> =-15V, I <sub>D</sub> =-2.6A, V <sub>GS</sub> =-10V <sup>(Note 1,2)</sup>	-	9.8	-	nC
Gate-Source Charge	$Q_{gs}$		-	1.5	-	
Gate-Drain Charge	$Q_{gd}$		-	2.2	-	
Input Capacitance	Ciss	V <sub>DS</sub> =-15V, V <sub>GS</sub> =0V, f=1.0MHZ	-	396	-	pF
Output Capacitance	Coss		-	47	-	
Reverse Transfer Capacitance	Crss	I=1.0WITZ	-	36	-	
Switching						
Turn-On Delay Time	td <sub>(on)</sub>	$V_{DD}$ =-15V, $I_{D}$ =-2.6A, $V_{GS}$ =-10V, $R_{G}$ =6 $\Omega^{(Note\ 1,2)}$	-	5	-	
Turn-On Rise Time	tr		-	30	-	ns
Turn-Off Delay Time	td <sub>(off)</sub>		-	25	-	
Turn-Off Fall Time	tf	KG=012(1000 1)=7	-	8	-	
Drain-Source Diode						
Maximum Continuous Drain-Source	l <sub>a</sub>		_	-	-1.5	А
Diode Forward Current	ls		-			
Diode Forward Voltage	V <sub>SD</sub>	Is=-1.0A, V <sub>G</sub> s=0V	-	-0.77	-1.2	V

#### NOTES:

- 1. Pulse width<a></a>300us, Duty cycle<a></a>2%
- 2. Essentially independent of operating temperature typical characteristics.
- 3. Rejah is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins mounted on a 1 inch FR-4 with 2oz. square pad of copper
- 4. The maximum current rating is package limited





#### TYPICAL CHARACTERISTIC CURVES


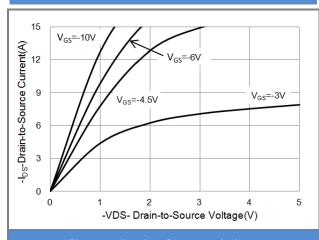


Fig.1 On-Region Characteristics

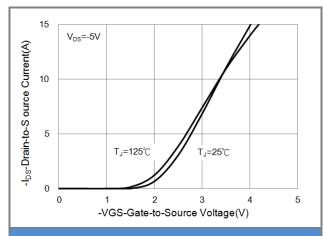

**Fig.2 Transfer Characteristics** 

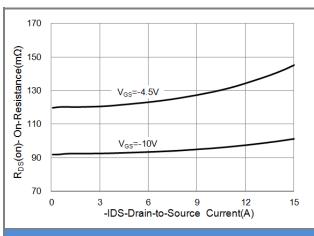


Fig.3 On-Resistance vs. Drain Current

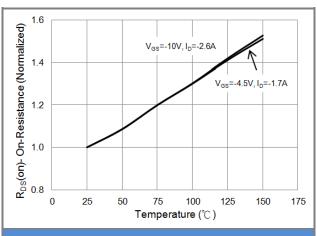


Fig.4 On-Resistance vs. Junction temperature


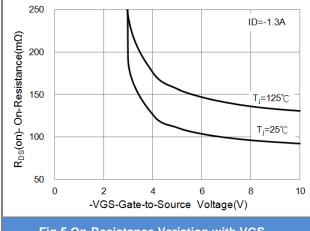



Fig.5 On-Resistance Variation with VGS.





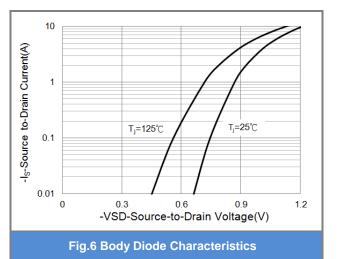

### **TYPICAL CHARACTERISTIC CURVES**

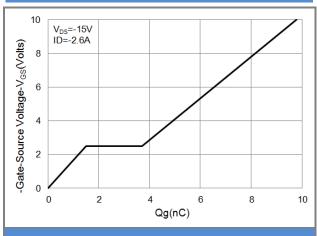

**Fig.7 Gate-Charge Characteristics** 

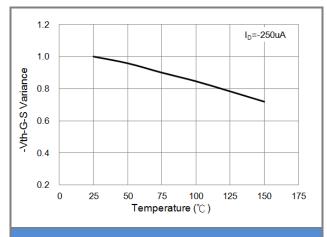


Fig.8 Threshold Voltage Variation with Temperature

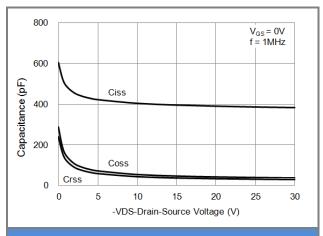


Fig.9 Capacitance vs. Drain-Source Voltage






### PART NO. PACKING CODE VERSION

Part No. Packing Code	Package Type	Packing Type	Marking	Version
PJS6809_S1_00001	SOT-23 6L	3K pcs / 7" reel	ST9	Halogen free RoHS compliant
PJS6809_S2_00001	SOT-23 6L	10K pcs / 13" reel	ST9	Halogen free RoHS compliant

### **MOUNTING PAD LAYOUT**

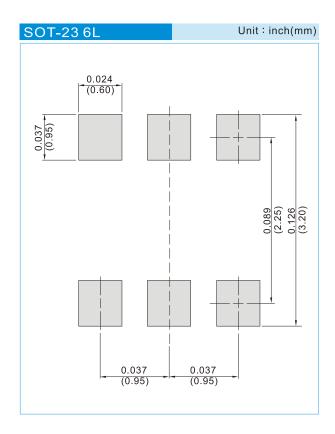





### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are
  responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no
  representation or warranty that such applications will be suitable for the specified use without further testing or
  modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# Panjit:

PJS6809\_S1\_00001