PJS68			
V P-Chan /oltage	nel Enhand -20 V	cement Mode	MOSFET
eatures	<u> </u>		
RDS(ON) . V(GS@-4.5V. ID@	@-2.7A<105mΩ	
		@-2.0A<135mΩ	
RDS(ON), V	GS@-1.8V, ID@	@-1.1A<190mΩ	
Advanced T	rench Process	s Technology	
Specially De	esigned for Sw	vitch Load, PWN	1 Application, et
Lead free in	compliance w	vith EU RoHS 2.0	0
Green mold	ing compound	as per IEC 612	49 standard
Mechanica	l Data		
Case: SOT-	23 6L Packag	e	
Terminals: S	Solderable per	MIL-STD-750, N	Method 2026
Approx. We	ight: 0.0005 o	unces, 0.014 gra	ams

0.020(0.50) 0.012(0.30) --+ BSC 0.057(1.45) MAX. 0.006(0.15) MAX. 0.009(0.22) 0.003(0.08) 0.119(3.00) S1 5 D1 D2 6 4 lfΙ 1 2 3 G1 G2 **S**2

0.067(1.70)

Unit : inch(mm)

0.051(1.30)

Maximum Ratings and Thermal Characteristics (T_A=25°C unless otherwise noted)

PARAMETER		SYMBOL	LIMIT	UNITS
Drain-Source Voltage		V _{DS}	-20	V
Gate-Source Voltage		V _{GS}	<u>+</u> 12	V
Continuous Drain Current	nuous Drain Current		-2.7	А
Pulsed Drain Current	ulsed Drain Current		-11	А
	T _a =25°C	P	1.25	W
Power Dissipation	Derate above 25°C	PD	10	mW/°C
Operating Junction and Storage	Temperature Range	TJ,TSTG	rg -55~150	
Typical Thermal Resistance - Junction to Ambient ^(Note 3)		R _{θJA}	100	°C/W




Electrical Characteristics (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Static			·			
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =-250uA	-20	-	-	V
Gate Threshold Voltage	$V_{\text{GS(th)}}$	V _{DS} =V _{GS} , I _D =-250uA	-0.4	-0.69	-1.2	V
Drain-Source On-State Resistance	R _{DS(on)}	V _{GS} =-4.5V, I _D =-2.7A	-	84	105	mΩ
		V _{GS} =-2.5V, I _D =-2.0A	-	104	135	
		V _{GS} =-1.8V, I _D =-1.1A	-	134	190	
Zero Gate Voltage Drain Current	IDSS	V _{DS} =-20V, V _{GS} =0V	-	-0.01	-1	uA
Gate-Source Leakage Current	lgss	V _{GS} = <u>+</u> 12V, V _{DS} =0V	-	<u>+</u> 10	<u>+</u> 100	nA
Dynamic						
Total Gate Charge	Q_{g}		-	5.4	-	nC
Gate-Source Charge	Q_{gs}	$V_{DS}=-10V, I_{D}=-2.7A,$	-	0.7	-	
Gate-Drain Charge	Q_gd	V _{GS} =-4.5V ^(Note 1,2)	-	1.4	-	
Input Capacitance	Ciss		-	416	-	pF
Output Capacitance	Coss	V _{DS} =-10V, V _{GS} =0V, f=1.0MHZ	-	43	-	
Reverse Transfer Capacitance	Crss	I=1.0IVIHZ	-	32	-	
Switching						
Turn-On Delay Time	td _(on)		-	4	-	
Turn-On Rise Time	tr	V_{DD} =-10V, I _D =-2.7A,		27	-	ns
Turn-Off Delay Time	td _(off)	$V_{GS}=-4.5V$,		78	-	
Turn-Off Fall Time	tf	$R_G=6\Omega^{(Note 1,2)}$	-	45	-	
Drain-Source Diode						
Maximum Continuous Drain-Source	1-				-1.5	А
Diode Forward Current	ls				-1.5	A
Diode Forward Voltage	V _{SD}	Is=-1.0A, V _{GS} =0V	-	-0.8	-1.2	V

NOTES :

- 1. Pulse width</br>
- 2. Essentially independent of operating temperature typical characteristics.
- 3. R_{®JA} is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins mounted on a 1 inch FR-4 with 2oz. square pad of copper
- 4. The maximum current rating is package limited



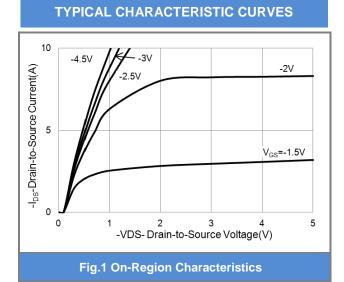

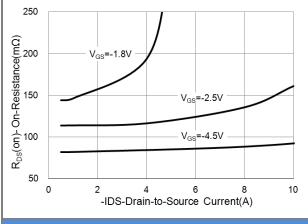
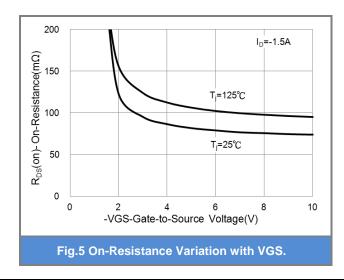


Fig.3 On-Resistance vs. Drain Current



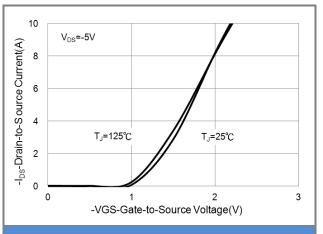


Fig.2 Transfer Characteristics

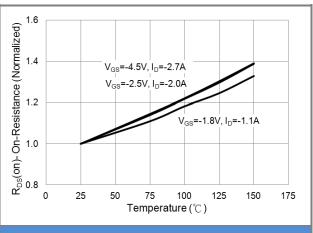
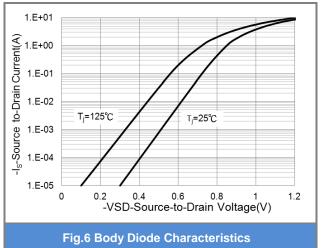


Fig.4 On-Resistance vs. Junction temperature





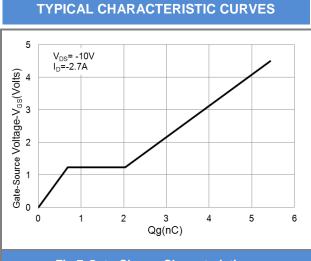


Fig.7 Gate-Charge Characteristics

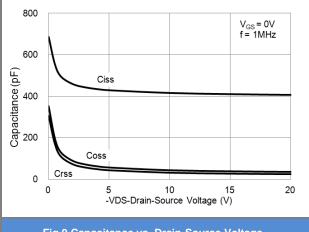


Fig.9 Capacitance vs. Drain-Source Voltage

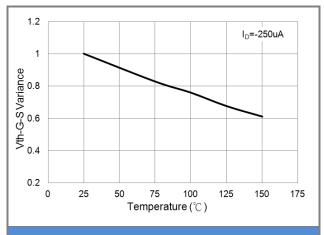



Fig.8 Threshold Voltage Variation with Temperature.



PART NO. PACKING CODE VERSION

Part No. Packing Code	Package Type	Packing Type	Marking	Version
PJS6811_S1_00001	SOT-23 6L	3K pcs / 7" reel	SE1	Halogen free RoHS compliant
PJS6811_S2_00001	SOT-23 6L	10K pcs / 13" reel	SE1	Halogen free RoHS compliant

MOUNTING PAD LAYOUT

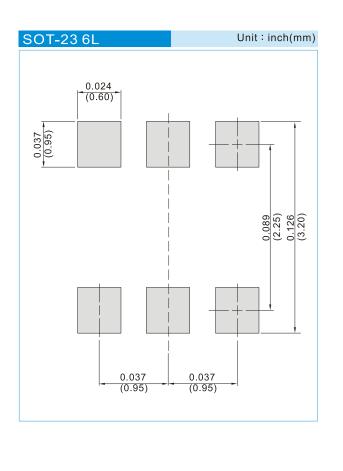





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panjit: PJS6811_S1_00001