



SURFACE MOUNT SUPERFAST RECTIFIER

VOLTAGE 50 to 600 Volt CURRENT 2 Ampere

FEATURES


- For surface mounted applications in order to optimize board space
- · Easy pick and place
- · Superfast recovery times for high efficiency.
- · Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- · Glass passivated junction
- Lead free in compliance with EU RoHS 2.0
- · Green molding compound as per IEC 61249 standard
- · AEC-Q101 qualified

MECHANICAL DATA

- · Case: JEDEC DO-214AC molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- · Polarity: Color band denotes cathode end
- Standard packaging: 12mm tape (EIA-481)
- · Weight: 0.0023 ounce, 0.0679 gram







MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

PARAMETER		SYMBOL	ES2A- AU	ES2B- AU	ES2C- AU	ES2D- AU	ES2E- AU	ES2G- AU	ES2J- AU	UNITS
Maximum Recurrent Peak Reverse Voltage		$V_{_{RRM}}$	50	100	150	200	300	400	600	٧
Maximum RMS Voltage		V _{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage		V _{DC}	50	100	150	200	300	400	600	٧
Maximum Average Forward Current		I _{F(AV)}	2					Α		
Peak Forward Surge Current : 8.3ms single half sine- superimposed on rated load	-wave	I _{FSM}	50					Α		
Maximum Forward Voltage at 2A		V _F	0.95 1.25 1.7			1.7	٧			
Maximum DC Reverse Current at Rated DC Blocking Voltage		I _R				1	1			μΑ
Maximum Reverse Recovery Time (Not	te 3)	t _{rr}	35						ns	
Typical Junction Capacitance Measured at 1MHz and applied V _R =4V		CJ	25				pF			
	te 2) te 1)	$R_{_{ heta JA}}$ $R_{_{ heta JC}}$	150 30						°C / W	
Operating Junction and Storage Temperature Range		T_J, T_{STG}	-55 to +150						°С	

- 1. Mounted on a FR4 PCB, single-sided copper, with 100cm² copper pad area.
- 2. Mounted on a FR4 PCB, single-sided copper, mini pad.
- 3. Reverse Recovery Test Conditions: I_F =0.5A , I_R =1A I_R =1.25A.








Fig.1 Forward Current Derating Curve




Fig.2 Typical Junction Capacitance




Fig.3 Typical Reverse Characteristics





Fig.4 Typical Reverse Characteristics








Fig.6 Typical Forward Characteristics






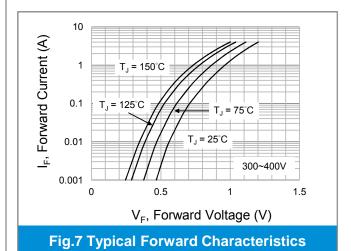


Fig.8 Typical Forward Characteristics





MOUNTING PAD LAYOUT

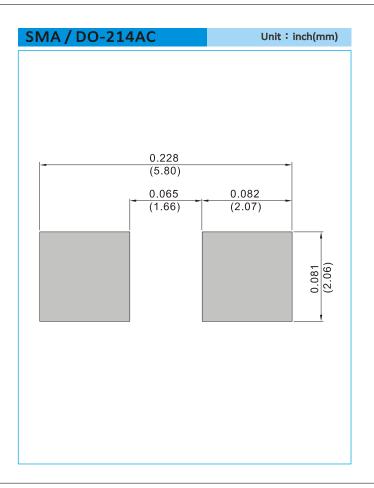

ORDER INFORMATION

· Packing information

T/R - 7.5K per 13" plastic Reel

T/R - 1.8K per 7" plastic Reel





Part No_packing code_Version

ES2A-AU_R1_000A1 ES2A-AU_R2_000A1

For example:



Packing Code XX					Version Code XXXXX				
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code			
Tape and Ammunition Box (T/B)	Α	N/A	0	HF	0	serial number			
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number			
Bulk Packing (B/P)	В	13"	2						
Tube Packing (T/P)	Т	26mm	X						
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y						
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U						
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D						





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
 Customers are responsible in comprehending the suitable use in particular applications.
 Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such æ medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panjit:

ES2A-AU_R1_000A1