



#### Surface Mount Extreme Low Vf Schottky Barrier Rectifier


Voltage 20~40 V Current 5 A

#### **Features**

- Extreme low forward voltage drop
- Low power loss, high efficiency
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

#### **Mechanical Data**

- Case : Molded plastic, SMAF-C
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0012 ounces, 0.034 grams

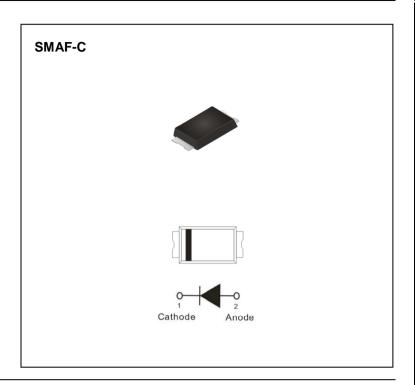

#### **Maximum Ratings** (T<sub>A</sub> = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	SBA520AFC	SBA530AFC	SBA540AFC	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	V
Maximum RMS Voltage	V <sub>RMS</sub>	14 21		28	V
Maximum DC Blocking Voltage	VR	20	30	40	V
Maximum Average Forward Rectified Current	I <sub>F(AV)</sub>		Α		
Peak Forward Surge Current : 8.3 ms Single Half Sine-Wave Superimposed On Rated Load	Ігэм	80			
Typical Thermal Resistance (Note 2) (Note 1)	Rejc Reja	15 150			°C/W
Operating Junction Temperature Range	TJ	-55 to +150			°C
Storage Temperature Range	$T_{STG}$	-55 to +150			°C

#### **Electrical Characteristics**

DADAMETED	CVMDOL TEST CO		NDITION	SBA520AFC		SBA530AFC		SBA540AFC		ште
PARAMETER	SYMBOL	TEST CONDITION		TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	UNITS
Forward Voltage	VF	I <sub>F</sub> = 10mA	T <sub>J</sub> =25 °C	0.17	-	0.17	-	0.17	-	V
		I <sub>F</sub> = 2A		0.34	-	0.35	-	0.36	-	
		I <sub>F</sub> = 5A		-	0.45	-	0.46	-	0.49	
		I <sub>F</sub> = 10mA	T <sub>J</sub> =125 °C	0.04	-	0.04	-	0.05	-	V
		I <sub>F</sub> = 2A		0.25	-	0.27	-	0.29	-	
Reverse Current <sup>(Note 3)</sup>	I <sub>R</sub>	V <sub>R</sub> = 10V	T <sub>J</sub> =25°C	47	-	33	-	25	-	μА
		V <sub>R</sub> = 20V		-	300	51	-	32	-	
		$V_R = 30V$		-	-	-	300	55	-	
		V <sub>R</sub> = 40V		-	-	-	-	-	250	
		V <sub>R</sub> = 20V	T <sub>J</sub> =125 °C	21	-	11	-	8	-	mA
		$V_R = 30V$		-	-	19	-	12	-	
		V <sub>R</sub> = 40V		-	-	-	-	19	-	


Note: 1. Mounted on a FR4 PCB, single-sided copper, standard footprint

- 2. Mounted on a FR4 PCB, single-sided copper, with 100cm² copper pad area
- 3. Short duration pulse test used to minimize self-heating effect





#### TYPICAL CHARACTERISTIC CURVES

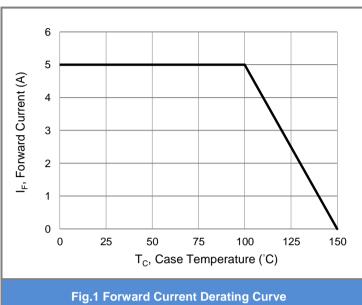

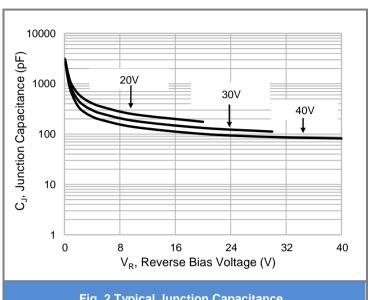


Fig. 2 Typical Junction Capacitance




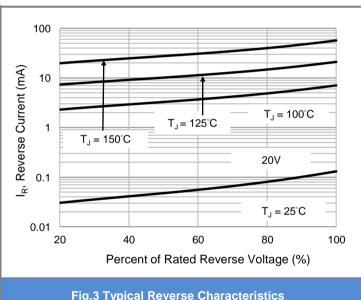


Fig.3 Typical Reverse Characteristics



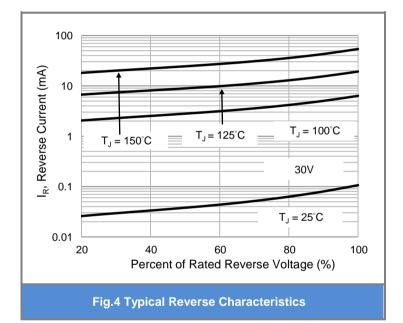


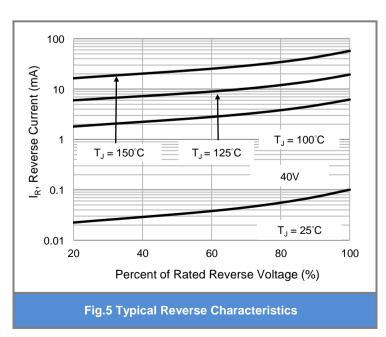


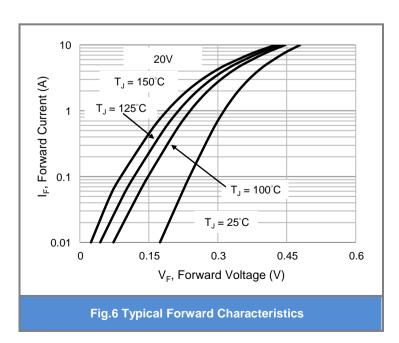




#### TYPICAL CHARACTERISTIC CURVES

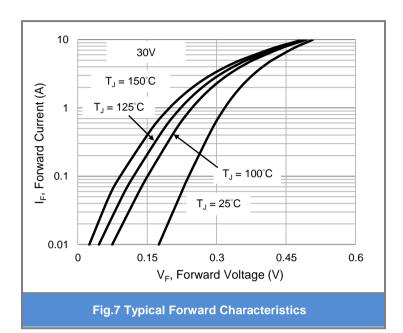

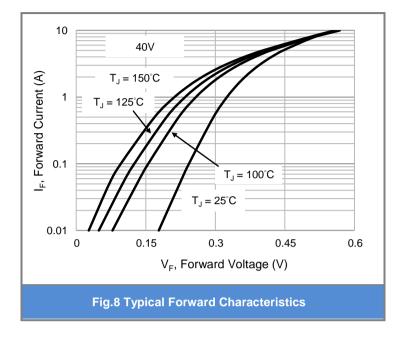

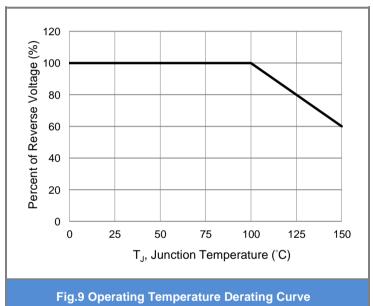







### Part No. Packing Code Version

Part No. Packing Code	Package Type	Packing Type	Marking	Version
SBA520AFC_R1_00001	SMAF-C	3K pcs / 7" reel	SBA520	Halogen free
SBA530AFC_R1_00001	SMAF-C	3K pcs / 7" reel	SBA530	Halogen free
SBA540AFC_R1_00001	SMAF-C	3K pcs / 7" reel	SBA540	Halogen free

## **Packaging Information & Mounting Pad Layout**

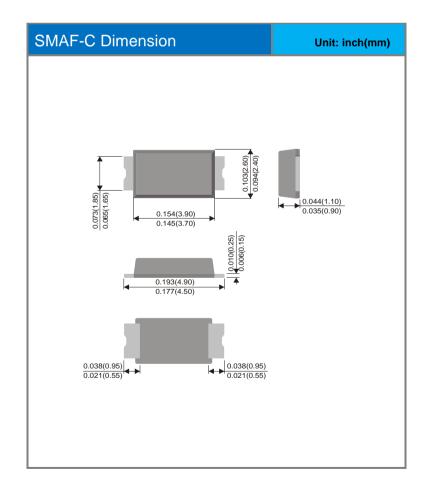

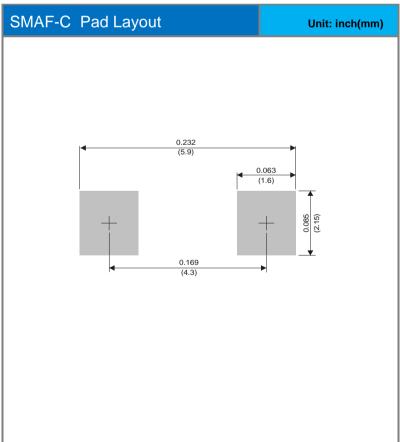





#### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panjit:

<u>SBA520AFC\_R1\_00001</u> <u>SBA530AFC\_R1\_00001</u> <u>SBA540AFC\_R1\_00001</u> <u>SBA540AFC\_R1\_00601</u> SBA530AFC\_R1\_00601