



AEC-Q200
This component was
always RoHS compliant
from the first date of
manufacture.

- **Ideal Front-End Filter for European Wireless Receivers**
- **Low-Loss, Coupled-Resonator Quartz Design**
- **Simple External Impedance Matching**
- **Complies with Directive 2002/95/EC (RoHS)**
- **Tape & Reel Standard ANSI/EIA481**




The RF1172C is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 433.92 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen. Typical applications of these receivers are wireless remote-control and security devices operating in Europe under ETSI I-ETS 300 220.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. RFMi's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching.

RF1172C

**433.92 MHz
SAW Filter**



**SM5050-8 Case
5 x 5**

Characteristic		Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency at 25°C	Absolute Frequency	f _c			433.92		MHz
	Tolerance from 433.92 MHz	Δf _C				±160	kHz
Insertion Loss		IL			3.0	5.0	dB
3 dB Bandwidth		BW ₃		500	600	800	kHz
Rejection	at f _c - 21.4 MHz (Image)			40	50		dB
	at f _c - 10.7 MHz (LO)			30	40		
	Ultimate				80		
Temperature	Operating Case Temp.	T _C		-40		+85	°C
	Turnover Temperature	T _O		15	25	35	°C
	Turnover Frequency	f _O			f _c		MHz
	Freq. Temp. Coefficient	FTC			0.032		ppm/°C ²
Frequency Aging	Absolute Value during the First Year	fA			≤10		ppm/yr
Impedance @ fc	Input Z _{IN} = R _{IN} C _{IN}	Z _{IN}		212 Ω 3.1 pF			
	Output Z _{OUT} = R _{OUT} C _{OUT}	Z _{OUT}		212 Ω 3.1 pF			
Lid Symbolization (Y=year WW=week S=shift)		409, YWWS					
Standard Reel Quantity	Reel Size 7 Inch			500 Pieces/Reel			
	Reel Size 13 Inch			3000 Pieces/Reel			



CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.



NOTES:

1. The design, manufacturing process, and specifications of this device are subject to change.
2. US or International patents may apply.

Rating	Value	Units
Input Power Level	10	dBm
DC Voltage	12	VDC
Storage Temperature	-40 to +85	°C
Soldering Temperature (10 seconds / 5 cycles max.)	260	°C


Typical Filter Response

Typical filter responses are shown below. The actual response is dependent on external impedance matching and circuit layout.

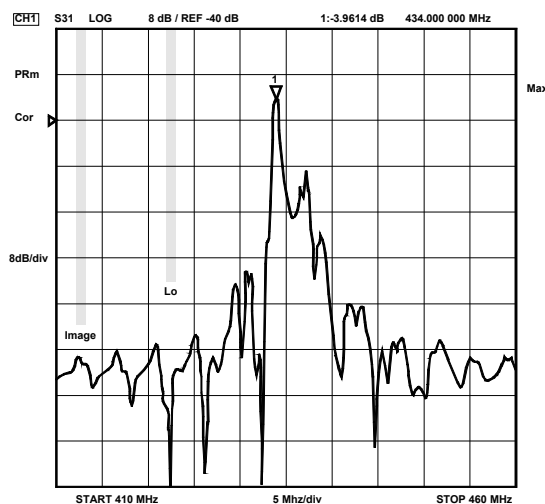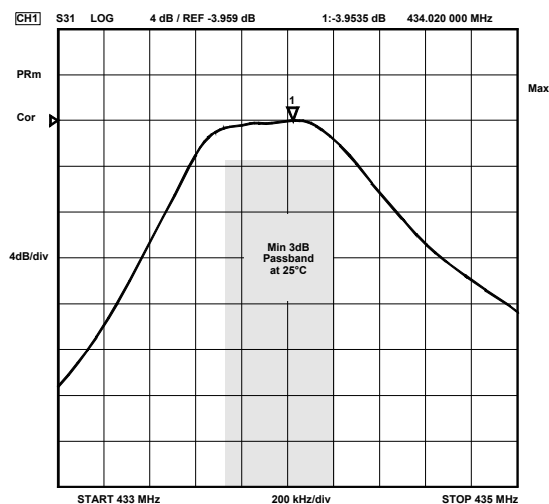


Electrical Connections

Pin	Connection
1	Input Ground
2	Input
3	to be Grounded
4	Case Ground
5	Output
6	Output Ground
7	to be Grounded
8	Case Ground

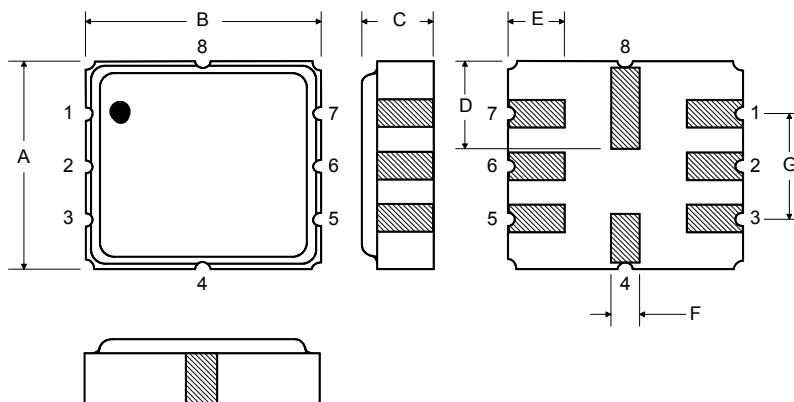

Matching Circuit to 50Ω

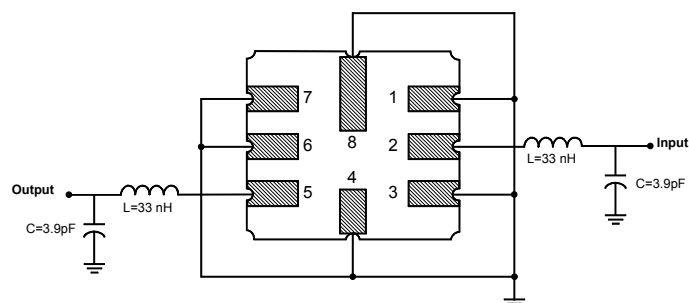


Case Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	4.8	5.0	5.2	0.189	0.197	0.205
B	4.8	5.0	5.2	0.189	0.197	0.205
C			1.7			0.067
D		2.08			0.082	
E		1.17			0.046	
F		0.64			0.025	
G	2.39	2.54	2.69	0.094	0.100	0.106

Recommended Reflow Profile

1. Preheating shall be fixed at 150~180° for 60~90 seconds.
2. Ascending time to preheating temperature 150° shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C peak (10 seconds.)
4. Time: 5 times maximum

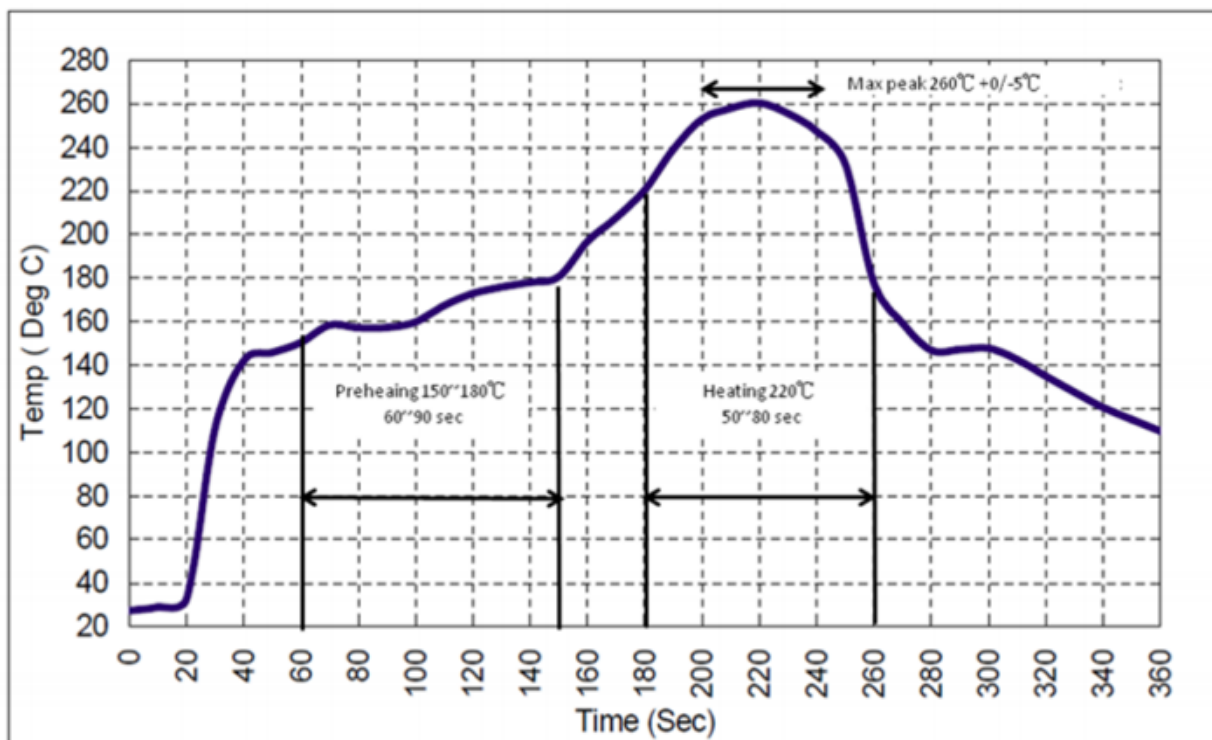

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[RFMi:](#)

[RF1172C](#)