

DIGI XBEE 3 ZIGBEE 3.0

Easy-to-add connectivity in a compact, low-power, low-profile footprint

Digi XBee® 3 modules accelerate time to market for designers, OEMs and solution providers by quickly enabling wireless connectivity and easy-to-add functionality. Building on industry-leading technology, pre-certified Digi XBee 3 modules offer the flexibility to switch between multiple frequencies and wireless protocols as needed.

Digi XBee 3 Zigbee 3.0 offers a fully interoperable ecosystem covering all vertical markets including building automation, smart energy, digital health, intelligent lighting, and others.

With Digi Remote Manager®, Digi XBee 3 modules can be easily configured and controlled from a simple, central platform. Built-in Digi TrustFence® security, identity and

data privacy features use more than 175 controls to protect against new and evolving cyber threats. MicroPython and Digi XCTU® software tools simplify adding functionality, configuration and testing.

From edge computing to future migration, Digi XBee modules offer size, weight, power and performance advantages ideal for scalable device connectivity. A versatile addition to the expanding Digi XBee Ecosystem of wireless modules, adapters and software, the Digi XBee 3 Series is engineered to accelerate development and deployment.

SIZE AND FLEXIBILITY

- At 13 mm x 19 mm, the new Digi XBee® 3 micro form factor allows for more compact and portable applications
- Digi XBee 3 is one module for all protocols including: Zigbee, 802.15.4, DigiMesh® and BLE, all configurable via Digi XCTU®

PROGRAMMABILITY

- Eliminate the need for an external microcontroller and create smart end nodes using MicroPython
- Bluetooth® Low Energy for beaconing, connecting to Bluetooth sensors and local configuration using the Digi XBee Mobile app


SECURITY

- Intrinsic IoT security with Digi TrustFence®, a layered approach securing the edge device, through the gateway, into and out of the IoT

RELATED PRODUCTS AND SERVICES



APPLICATION EXAMPLE

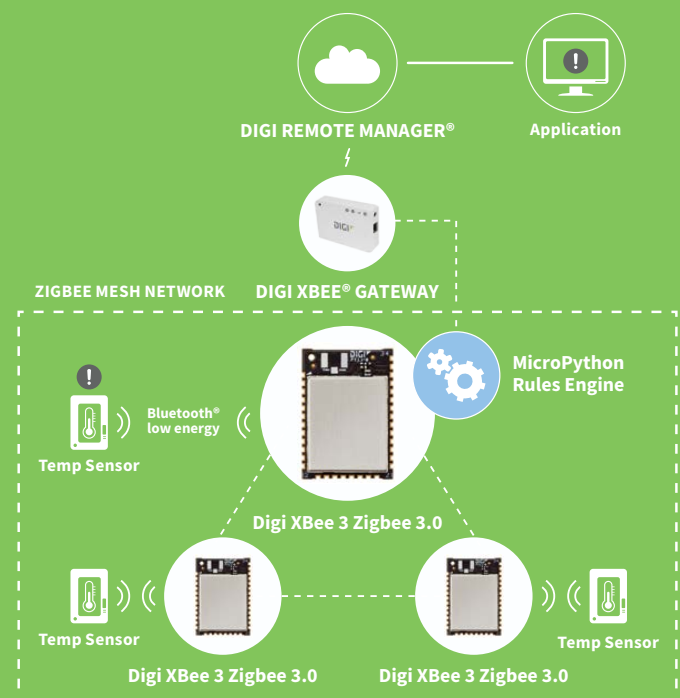

SPECIFICATIONS	Digi XBee® 3 Zigbee 3.0		Digi XBee® 3 PRO Zigbee 3.0
PERFORMANCE			
TRANSCIVER CHIPSET	Silicon Labs EFR32MG SoC		
DATA RATE	RF 250 Kbps, serial up to 1 Mbps		
INDOOR/URBAN RANGE*	Up to 60 m (200 ft)	Up to 90 m (300 ft)	
OUTDOOR/RF LINE-OF-SIGHT RANGE*	Up to 1200 m (4000 ft)	Up to 3200 m (2 miles)	
TRANSMIT POWER	+8 dBm	+19 dBm	
RECEIVER SENSITIVITY (1% PER)	-103 dBm Normal Mode		
FEATURES			
SERIAL DATA INTERFACE	UART, SPI, I²C		
CONFIGURATION METHOD	API or AT commands, local or over-the-air (OTA)		
FREQUENCY BAND	ISM 2.4 GHz		
FORM FACTOR	Micro, through-hole, surface mount		
INTERFERENCE IMMUNITY	DSSS (Direct Sequence Spread Spectrum)		
ADC INPUTS	(4) 10-bit ADC inputs		
DIGITAL I/O	15		
ANTENNA OPTIONS	Through-hole: PCB Antenna, U.FL Connector, RPSMA Connector SMT: RF Pad, PCB Antenna, or U.FL Connector Micro: U.FL Antenna, RF Pad, Chip Antenna		
OPERATING TEMPERATURE	-40° C to 85° C (-40° F to 185° F)		
DIMENSIONS (L X W X H)	Through-hole: 2.438 x 2.761 cm (0.960 x 1.087 in) SMT: 2.199 x 3.4 x 0.305 cm (0.866 x 1.33 x 0.120 in) Micro: 13 x 19 x 2 mm (0.533 x 0.76 x 0.087 in)		
PROGRAMMABILITY			
MEMORY	1 MB / 128 KB RAM (32KB are available for MicroPython)		
NETWORKING AND SECURITY			
PROTOCOL	Zigbee® 3.0		
ENCRYPTION	128/256 bit AES		
RELIABLE PACKET DELIVERY	Retries/acknowledgements		
IDS	PAN ID and addresses, cluster IDs and endpoints (optional)		
CHANNELS	16 channels		
POWER REQUIREMENTS			
SUPPLY VOLTAGE	2.1 to 3.6 V		
TRANSMIT CURRENT	40 mA @ 8 dBm	135 mA @ 19 dBm	
RECEIVE CURRENT	17 mA		
POWER-DOWN CURRENT	2 micro Amp @ 25° C (77° F)		
REGULATORY APPROVALS			
FCC, IC (NORTH AMERICA)	Yes	Yes	
ETSI (EUROPE)	Yes	No	
RCM (AUSTRALIA)	Yes	Yes	
ANATEL (BRAZIL)	Yes	Yes	
TELECK MIC (JAPAN)	Yes	No	
KCC (SOUTH KOREA)	Yes	No	

*Range figure estimates are based on free-air terrain with limited sources of interference. Actual range will vary based on transmitting power, orientation of transmitter and receiver, height of transmitting antenna, height of receiving antenna, weather conditions, interference sources in the area, and terrain between receiver and transmitter, including indoor and outdoor structures such as walls, trees, buildings, hills, and mountains.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Digi International:](#)

[XB3-24DMST](#) [XB3-24DMST-J](#) [XB3-24DMUS](#) [XB3-24DMUS-J](#) [XB3-24DMUT](#) [XB3-24DMUT-J](#) [XB3-24DMPS](#) [XB3-24DMPS-J](#) [XB3-24DMPT](#) [XB3-24DMPT-J](#) [XB3-24DMRS](#)