



- MICRO FORM FACTOR
- DIGI TRUSTFENCE® SECURED
- MICROPYTHON PROGRAMMABLE

1/3 THE SIZE  
OF CURRENT  
DIGI XBEE SMT



# DIGI XBEE 3 DIGIMESH 2.4

Wireless connectivity using the innovative and easy-to-deploy DigiMesh® protocol

Digi XBee® 3 modules accelerate time to market for designers, OEMs and solution providers by quickly enabling wireless connectivity and easy-to-add functionality. Building on industry-leading technology, pre-certified Digi XBee 3 modules offer the flexibility to switch between multiple frequencies and wireless protocols as needed.

These modules use the DigiMesh® networking protocol using a globally deployable 2.4 GHz transceiver. This peer-to-peer mesh network offers users added network stability through self-healing, dense network operation, extending the operational life of battery dependent networks and provides an upgrade path to IEEE 802.15.4 or Zigbee mesh protocols, if desired.

With Digi Remote Manager®, Digi XBee 3 modules can be easily configured and controlled from a simple, central platform. Built-in Digi TrustFence® security, identity and data privacy features use more than 175 controls to protect against new and evolving cyber threats. MicroPython and Digi XCTU® software tools simplify adding functionality, configuration and testing.

From edge computing to future migration, Digi XBee modules offer size, weight, power and performance advantages ideal for scalable device connectivity. A versatile addition to the expanding Digi XBee Ecosystem of wireless modules, adapters and software, the Digi XBee 3 series is engineered to accelerate development and deployment.

## SIZE AND FLEXIBILITY

- At 13 mm x 19 mm, the new Digi XBee® 3 micro form factor allows for more compact and portable applications
- Digi XBee 3 is one module for all protocols including: Zigbee, 802.15.4, DigiMesh®, and BLE, all configurable via Digi XCTU®

## PROGRAMMABILITY

- Eliminate the need for an external microcontroller and create smart end nodes using MicroPython
- Bluetooth® Low Energy for beaconing, connecting to Bluetooth sensors and local configuration using the Digi XBee Mobile app

## SECURITY

- Intrinsic IoT security with Digi TrustFence®, a layered approach securing the edge device, through the gateway, into and out of the IoT

## RELATED PRODUCTS AND SERVICES



Development  
Kits



Digi XCTU®



Digi  
TrustFence®




Digi Remote  
Manager®



Digi Design  
Services

## APPLICATION EXAMPLE

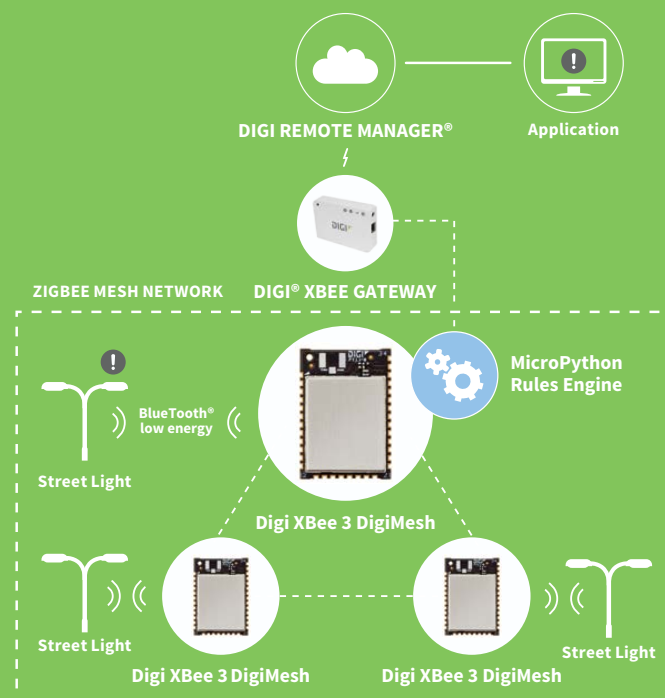


| SPECIFICATIONS                  | Digi XBee 3 DigiMesh®                                      | Digi XBee 3 DigiMesh® PRO |
|---------------------------------|--|---------------------------|
| PERFORMANCE                     |  |                           |
| DATA RATE                       | RF 250 Kbps, serial up to 1 Mbps                           |                           |
| INDOOR/URBAN RANGE*             | Up to 60 m (200 ft)  | Up to 90 m (300 ft)       |
| OUTDOOR/RF LINE-OF-SIGHT RANGE* | Up to 1200 m (4000 ft)                                     | Up to 3200 m (2 miles)    |
| TRANSMIT POWER                  | +8 dBm   | +19 dBm                   |
| RECEIVER SENSITIVITY (1% PER)   | -103 dBm normal mode                                       |                           |
| FEATURES                        |  |                           |
| SERIAL DATA INTERFACE           | UART, SPI, I²C   |                           |
| CONFIGURATION METHOD            | API or AT commands, local or over-the-air (OTA)            |                           |
| FREQUENCY BAND                  | ISM 2.4 GHz  |                           |
| FORM FACTOR                     | Micro  |                           |
| INTERFERENCE IMMUNITY           | DSSS (Direct Sequence Spread Spectrum)                     |                           |
| ADC INPUTS                      | (4) 10-bit ADC inputs                                      |                           |
| DIGITAL I/O                     | 15   |                           |
| ANTENNA OPTIONS                 | Micro: U.FL Antenna, RF Pad, Chip Antenna                  |                           |
| OPERATING TEMPERATURE           | -40° C to 85° C (-40° F to 185° F)                         |                           |
| DIMENSIONS (L X W X H)          | Micro: 13 x 19 x 2 mm (0.533 x 0.76 x 0.087 in)            |                           |
| PROGRAMMABILITY                 |  |                           |
| MEMORY                          | 1 MB / 128 KB RAM  |                           |
| CPU/CLOCK SPEED                 | HCS08 / up to 50.33 MHz                                    |                           |
| NETWORKING AND SECURITY         |  |                           |
| PROTOCOL                        | 802.15.4   |                           |
| ENCRYPTION                      | 128/256 bit AES  |                           |
| RELIABLE PACKET DELIVERY        | Retries/acknowledgements                                   |                           |
| IDS                             | PAN ID and addresses, cluster IDs and endpoints (optional) |                           |
| CHANNELS                        | 16 channels  |                           |
| POWER REQUIREMENTS              |  |                           |
| SUPPLY VOLTAGE                  | 2.1 to 3.6 V   |                           |
| TRANSMIT CURRENT                | 135 mA @ 19 dBm  |                           |
| RECEIVE CURRENT                 | 17 mA  |                           |
| POWER-DOWN CURRENT              | 2 micro Amp @ 25° C (77° F)                                |                           |
| REGULATORY APPROVALS            |  |                           |
| FCC, IC (NORTH AMERICA)         | Yes  | Yes                       |
| ETSI (EUROPE)                   | Yes  | No                        |
| RCM (AUSTRALIA)                 | Yes  | Yes                       |
| ANATEL (BRAZIL)                 | Yes  | Yes                       |
| TELECK MIC (JAPAN)              | Yes  | No                        |
| KCC (SOUTH KOREA)               | Yes  | Yes                       |

\*Range figure estimates are based on free-air terrain with limited sources of interference. Actual range will vary based on transmitting power, orientation of transmitter and receiver, height of transmitting antenna, height of receiving antenna, weather conditions, interference sources in the area, and terrain between receiver and transmitter, including indoor and outdoor structures such as walls, trees, buildings, hills, and mountains.

| PART NUMBERS  | DESCRIPTION   |
|---------------|---|
| XB3-24DMRM-J  | Digi XBee 3, 2.4 Ghz, DigiMesh, Micro, RF Pad Ant, MMT                  |
| XB3-24DMUM-J  | Digi XBee 3, 2.4 Ghz, DigiMesh, Micro, U.FL Ant, MMT                    |
| XB3-24DMCM-J  | Digi XBee 3, 2.4 Ghz, DigiMesh, Micro, Chip Ant, MMT                    |
| XB3-24DMRM    | Digi XBee 3 PRO, 2.4 Ghz, DigiMesh, Micro, RF Pad Ant, MMT              |
| XB3-24DMUM    | Digi XBee 3 PRO, 2.4 Ghz, DigiMesh, Micro, U.FL Ant, MMT                |
| XB3-24DMCM    | Digi XBee 3 PRO, 2.4 Ghz, DigiMesh, Micro, Chip Ant, MMT                |
| A24-HABUF-P5I | Antenna - 2.4 GHz, half wave dipole, 2.1 dBi, U.FL female, articulating |
| A24-HASM-450  | Antenna - 2.4 GHz, half wave dipole, 2.1 dBi, RPSMA male, articulating  |
| A24-HASM-525  | Antenna - 2.4 GHz, half wave dipole, 2.1 dBi, RPSMA male, articulating  |
| DC-ANT-24DT   | Antenna - Wi-Fi, table-top mount, 2450 Mhz, 0.5 m cable                 |

## PRODUCT DIMENSIONS

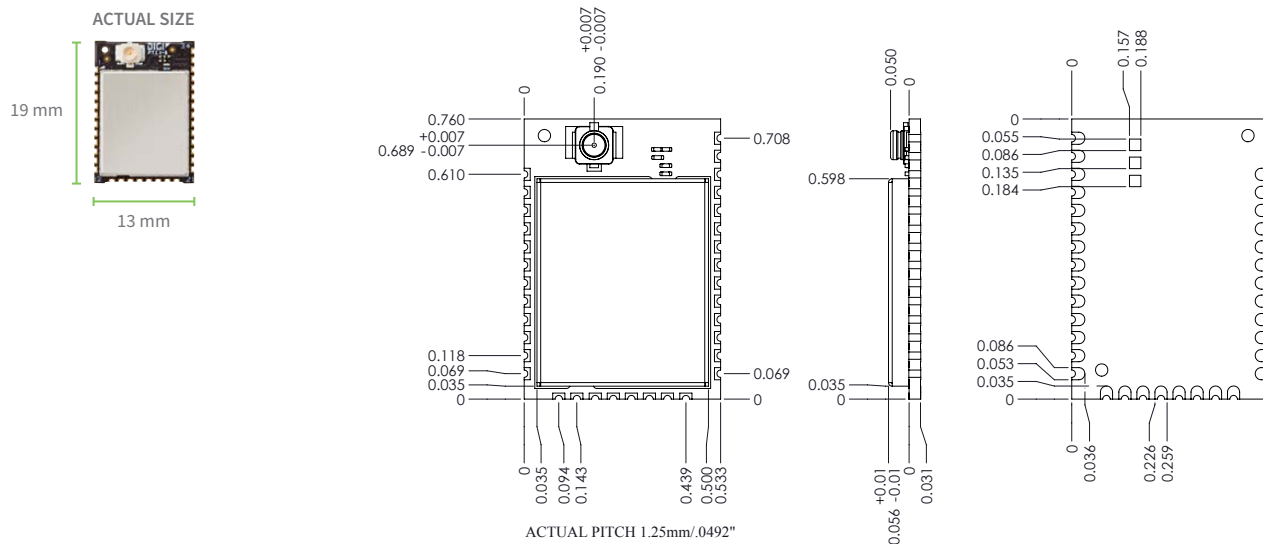

FOR MORE INFORMATION  
PLEASE VISIT **DIGI.COM**

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2020 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91004233  
A8/1120

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL GERMANY**  
+49-89-540-428-0

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Digi International:](#)

[XB3-24DMRS-J](#)