

Digi XBee Smart Plug™

ZigBee® Energy Manager

The Digi XBee Smart Plug is an easy-to-deploy, plug-in ZigBee energy management device and network extender.



Overview

The Digi XBee Smart Plug is an intelligent power outlet and ZigBee network extender. It enables users to measure and control connected electrical devices, maximizing energy efficiency and reducing cost, as well as extending the range of a wireless ZigBee network. The integrated ambient light sensor on the Digi XBee Smart Plug provides real-time environmental data within the deployment area.


Simply plug the Digi XBee Smart Plug into a standard power outlet and add the device to your ZigBee network. The unit integrates with ConnectPort® X gateways to centralize input from multiple Digi XBee Smart Plugs into an energy management solution. Appliance performance data, such as load consumption, power status, operating range, and erratic behavior is communicated over the network. Users are able to manage and control their devices from a central location, ensuring peak performance and efficiency.

The XBee® product family is part of Digi's unsurpassed offering of Drop-in Networking solutions, providing users with seamless, end-to-end communication between devices. XBee device adapters provide wireless connectivity to electronic devices in wired networks. ConnectPort X gateways enable users to access and configure remote XBee devices in a ZigBee network.

Related Products



Gateways



Modules



Adapters



Dev Kits




Network Extenders



Sensors

Application Highlight

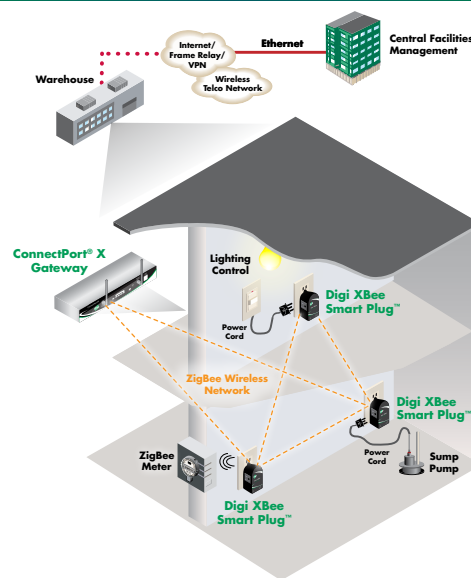

Features/Benefits

- Wireless energy management device
- Extends the range and strength of a ZigBee network
- Creates additional network pathways for more reliable mesh networking
- Plugs into a standard power outlet for easy set up
- Small form factor for unobtrusive deployment
- Secure mounting tab prevents accidental unplugging and theft
- 120VAC, 8A rated socket for appliances
- Integrated current and ambient light sensors



Platform		Digi XBee Smart Plug™	
Performance			
RF Data Rate		250 Kbps	
Indoor/Urban Range		Up to 400 ft (120 m)	
Transmit Power		63 mW (18 dBm), 100 mW EIRP	
Receiver Sensitivity (1% PER)		-102 dBm	
Features			
Interfaces		ZigBee Pro Feature Set, Digi XBee ZB	
Frequency Band		2.4 GHz (ISM)	
LEDs		Outlet (Yellow): Solid when user AC socket is powered; Associate (Green): Solid when external power is supplied, blinks when unit is connected and associated to an RF network	
Controls		Push Button - Device reset, Configuration reset to factory defaults, Identification/Commissioning mode	
Antenna Options		Internal	
Locking Mechanism		Unit secures to electrical outlet using center outlet screw (U.S. model only)	
Integrated Sensors			
Current Sensor		Detects current draw from user AC socket, Range: 0A to 8A	
Ambient Light Sensor		Range of spectral bandwidth: 360 to 970 nm (similar to human eye) Wavelength of peak sensitivity: 570 nm	
Networking & Security			
Networking Topologies		Mesh	
Number of Channels		12 - 5 MHz channels (Direct Sequence Spread Spectrum)	
General			
Dimensions (L x W x H)		3.07 in x 2.42 in x 1.47 in (9.40 cm x 6.14 cm x 3.73 cm)	
Weight		2.50 oz (70.87 g)	
Power Input		120VAC, 60 Hz	
Load Rating		Resistive: 120VAC, 8A; Inductive (0.75 pf): 120VAC, 960VA Motor: 1/3 HP (7.2 FLA)	
Operating Temperature		0° C to 40° C (32° F to 104° F)	
Relative Humidity		5% to 95% (non-condensing)	
Regulatory Approvals			
FCC Class B (USA)		Yes	
IC Class B (Canada)		Yes	
UL		UL listed 40HP, Category Code: ATNZ/7 - Appliance Controls, File: E321891	

Visit www.digi.com for part numbers.

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

Digi International
877-912-3444
952-912-3444
info@digi.com

**Digi International
France**
+33-1-55-61-98-98
www.digi.fr

**Digi International
KK**
+81-3-5428-0261
www.digi-intl.co.jp

**Digi International
(HK) Limited**
+852-2833-1008
www.digi.cn



91001469
B2/510

BUY ONLINE • www.digi.com

© 2008-2010 Digi International Inc.
All rights reserved. Digi, Digi International, the Digi logo, the Making Wireless M2M Easy logo, ConnectPort, Digi XBee Smart Plug and XBee are either trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective holders. All information provided is subject to change without notice.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Digi International:](#)

[XR-Z14-CW2P6](#)