




PHYSICAL DIMENSIONS

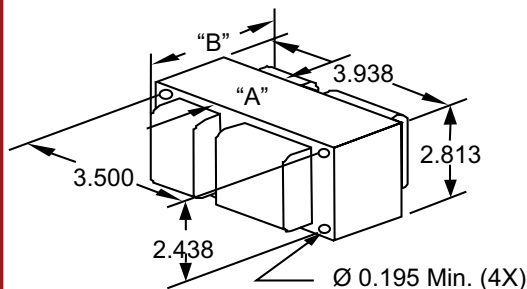

WIRING DIAGRAM

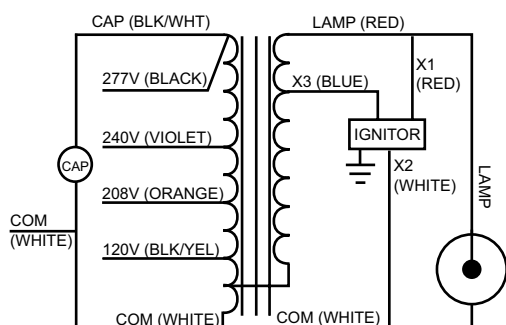


CAPACITOR

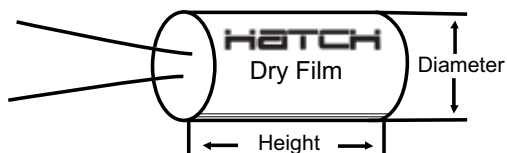

Diameter: 1.38"

Height: 3.17"

IGNITOR

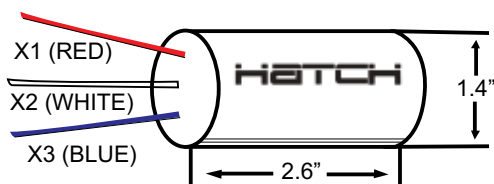

Pulse Height (kV): 2.5 ~ 4.0

Pulse Width ($\geq \mu$ s): 1.0 @ 2.3kV

**2 YEAR WARRANTY FROM
DATE OF MANUFACTURE**

MAGNETIC HID BALLAST

Ballast Type	High Pressure Sodium	Circuit Type	HX-HPF
Lamp	150W S55	Frequency	60Hz

ELECTRICAL SPECIFICATIONS

		Quad Tap			
Input Voltage (V)		120	208	240	277
Line Current (A)	Operating	1.6	0.9	0.8	0.7
	Open Circuit	3.0	1.7	1.5	1.3
	Starting	1.6	0.9	0.8	0.7
Recommended Fuse		5	3	3	3
Input Voltage At Lamp Dropout		85	140	160	185
UL Class H 180°C Temp. Code		D	C	B	B
UL Class N 200°C Temp. Code		A	A	A	A
Nom. Open Circuit Voltage		121			
Input Power (W)		182			
Power Factor ($\geq$ %)		90			
Regulation ($\pm$ %)	Line Volts	5			
	Lamp Watts	10			
Min. Starting Temp		-40°F / -40°C			
Ballast Dimensions (inches)	A	2.56			
	B	4.05			
Ballast Net Weight (lbs)		7.4			
Lead Length (inches)		12			
Capacitor	Capacitance (μ F)	14			
	Min VAC Rating (V)	280			
Requires Ignitor Model		GHPSR1			
Coil Material (Pri./ Sec.)		Cu / Al			

60 HZ. TEST PROCEDURES

Short Circuit Current (A)	Secondary	Min	3.5			
		Max	5.4			
	Input	Min	0.8	0.5	0.4	0.3
		Max	2.3	1.4	1.1	1.0
Open Circuit Voltage (V)	Min	110				
	Max	140				
High Potential Test (V)	1 Minute	1600				
	1 Second	1900				

REFERENCE LAMP DATA

	Test Range	ANSI Standard
Starting Current (A)		3.5 ~ 5.4
CCF	1.6	≤ 1.8
OCV (V)	110 ~ 140	
Lamp Watts	WITHIN TRAPEZOID	

OPTIONAL FEATURES

(ADD SUFFIX FOR OPTIONS)

-WB	With welded bracket
-I	With ignitor
-DC	With dry film capacitor
-OC	With oil filled capacitor
-K	With distributor replacement kit (includes bracket, capacitor and ignitor as necessary)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hatch Lighting:](#)

[GS150-MLT-HXCA-K](#)