



#### SURFACE-MOUNT FAST SWITCHING DIODE

#### **Features**

- · Fast Switching Speed
- Low-Forward Voltage: maximum of 0.715V at 1mA
- Fast Reverse Recovery: maximum of 4ns
- Low Capacitance: maximum of 2pF
- Surface-Mount Package Ideally Suited for Automated Insertion
- For General Purpose Switching Applications
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- The 1N4148WQ is suitable for automotive applications requiring specific change control; this part is AEC-Q101 qualified, PPAP capable, and manufactured in IATF 16949 certified facilities.

https://www.diodes.com/quality/product-definitions/

### **Mechanical Data**

- Package: SOD123
- Package Material: Molded Plastic, "Green" Molding Compound.
   UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Matte Tin Finish Annealed over Alloy 42 Leadframe
   (Lead-Free Plating). Solderable per MIL-STD-202, Method 208 @3
- Polarity: Cathode Band
- Weight: 0.01 grams (Approximate)



Top View

#### **Ordering Information** (Note 4)


Orderable Part Number	Doolsons	Pa	cking
Orderable Part Nulliber	Package	Qty.	Carrier
BAV16W-7-F	SOD123	3,000	Tape & Reel
1N4148W-7-F	SOD123	3,000	Tape & Reel
1N4148WQ-7-F	SOD123	3,000	Tape & Reel
1N4148W-13-F	SOD123	10,000	Tape & Reel
1N4148WQ-13-F	SOD123	10,000	Tape & Reel

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
- 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 4. For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/.

### **Marking Information**

SOD123



xx = Product Type Marking Code (T4)

YM = Date Code Marking Y = Year (ex: L = 2024)

M = Month (ex: 9 = September)

A Bar around the Date Code Marking Denotes Assembly Site

Date Code Key

Year	2001	-	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033
Code	М	-	L	М	N	Р	R	S	Т	U	V	W
Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec



### Maximum Ratings (@ T<sub>A</sub> = +25°C, unless otherwise specified.)

Characteristic		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	Vrrm Vrwm Vr	100	٧	
RMS Reverse Voltage		V <sub>R</sub> (RMS)	71	V
Forward Continuous Current		I <sub>FM</sub>	300	mA
Non-Repetitive Peak Forward Surge Current	@ t = 1.0μs @ t = 1.0s	IFSM	2.0 1.0	А

## **Thermal Characteristics**


Characteristic	Symbol	Value	Unit
Power Dissipation (Note 5)	P <sub>D</sub>	400	mW
Thermal Resistance Junction to Ambient Air (Note 5)	$R_{ heta JA}$	315	°C/W
Operating and Storage Temperature Range	TJ, TSTG	-55 to +150	°C


# **Electrical Characteristics** (@ T<sub>A</sub> = +25°C, unless otherwise specified.)


Characteristic	Symbol	Min	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 6)	V <sub>(BR)R</sub>	100	_	V	I <sub>R</sub> = 1.0μA
Forward Voltage	V <sub>FM</sub>		0.715 0.855 1.0 1.25	٧	IF = 1.0mA IF = 10mA IF = 50mA IF = 150mA
Peak Reverse Current (Note 6)	I <sub>RM</sub>		1.0 50 30 25	μΑ μΑ μΑ nA	$V_R = 75V$ $V_R = 75V$ , $T_J = +150^{\circ}C$ $V_R = 25V$ , $T_J = +150^{\circ}C$ $V_R = 20V$
Total Capacitance	Ст	_	2.0	pF	$V_R = 0, f = 1.0MHz$
Reverse Recovery Time	t <sub>RR</sub>	_	4.0	ns	$\begin{split} I_F &= I_R = 10 mA, \\ I_{RR} &= 0.1 \text{ x } I_R,  R_L = 100 \Omega \end{split}$


5. Part mounted on FR-4 PC board, double-sided, with 3oz copper plating and with anode and cathode terminal pad dimensions of 2" x 2". 6. Short duration pulse test used to minimize self-heating effect. Notes:







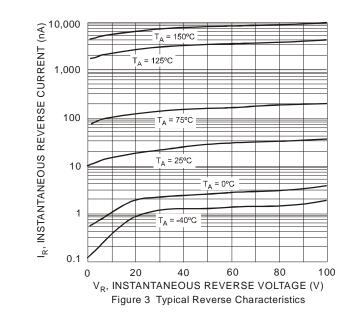






## **Package Outline Dimensions**

 $\label{please} Please see \ http://www.diodes.com/package-outlines.html for the latest version.$ 

#### **SOD123**

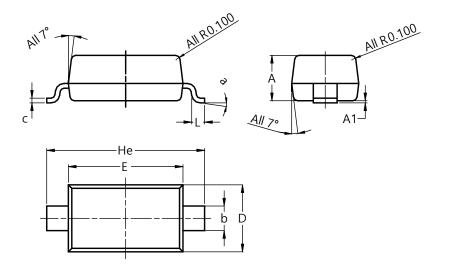


SOD123						
Dim	Min	Max	Тур			
Α	1.00	1.35	1.05			
A1	0.00	0.10	0.05			
b	0.52	0.62	0.57			
C	0.10	0.15	0.11			
D	1.40	1.70	1.55			
Е	2.55	2.85	2.65			
He	3.55	3.85	3.65			
L	0.25	0.40	0.30			
а	00	8°				
All Dimensions in mm						

## **Suggested Pad Layout**

Please see http://www.diodes.com/package-outlines.html for the latest version.

#### SOD123



Dimensions	Value (in mm)		
Х	0.900		
X1	4.050		
Υ	0.950		



#### **IMPORTANT NOTICE**

- 1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
- 2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
- 3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
- 4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
- 5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
- 6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
- 7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
- 8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
- 9. This Notice may be periodically updated with the most recent version available at <a href="https://www.diodes.com/about/company/terms-and-conditions/important-notice">https://www.diodes.com/about/company/terms-and-conditions/important-notice</a>

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries. All other trademarks are the property of their respective owners.

© 2024 Diodes Incorporated. All Rights Reserved.

www.diodes.com

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# **Diodes Incorporated:**

BAV16W-7-F 1N4148W-7-F BAV16W-13-F 1N4148W-13-F 1N4148WQ-7-F