



## Delta 12B

868/869MHZ 130mm Flexy Rubber 1/4 Wave Whip Antenna



### **Key Features**

- Range of ISM frequency bands available
- 3dBi gain
- 130mm whip antenna

### **General Description**

The Delta 12 antenna range are ½ wave ISM whip antennas. This style of antenna is offered in a number of different frequencies covering the popular ISM bands.

This antenna is perfect for high volume ISM applications within the mobile applications world.

The Delta 12A is tuned to the ISM (Industrial, Scientific and Medical) radio frequency bands of 868 and 869MHz.

#### **Additional Considerations**

- 1/4 wave radiating element
- Ideal for high volume ISM applications









## Delta 12B

868/869MHZ 130mm Flexy Rubber 1/4 Wave Whip Antenna


## **Key Specifications - Electrical**

Frequency:	
Operating Temperature range:	-30°C - +75°C
Impedance:	50 Ohm
VSWR:	<2
Gain:	3dBi
High Gain:	5dBi
Polarization:	Vertical
Radiation:	1/4 Wave whip
Max input power:	50W

## **Key Specifications - Mechanical**

Dimensions:	L130mm
Connector:	SMA Male / BNC Male
Mounting Method:	Direct connect

#### Return Loss - 869MHz

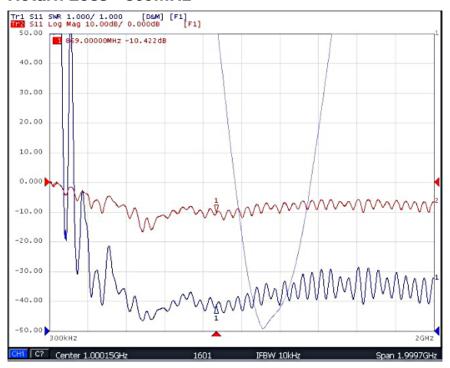






# Delta 12B

868/869MHZ 130mm Flexy Rubber 1/4 Wave Whip Antenna

#### VSWR - 869MHz

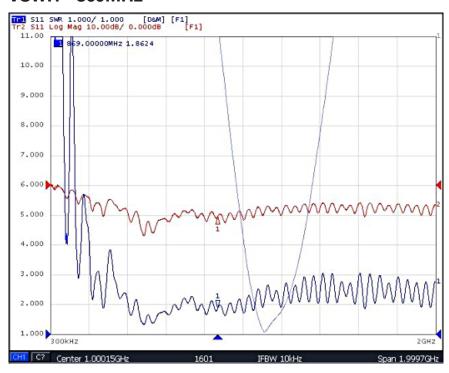

## **Ordering Details**

Part Number	Description
DELTA12B/X/SMAM/S/S/17	869MHZ 130mm Flexy Rubber 1/4 Wave Whip Antenna 3dBi Gain SMA Male Connector
DELTA12B/X/BNCM/S/S/17	869MHZ 130mm Flexy Rubber 1/4 Wave Whip Antenna 3dBi Gain BNC Male Connector

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Siretta:

DELTA12B/X/SMAM/S/S/17