


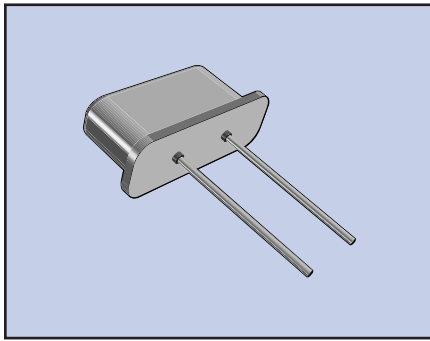

This product represents our selection of low profile resistance weld type quartz crystals.

OPTIONS:

- extended temperature range
- tighter tolerances
- mylar spacer
- 3rd in line lead base
- radial tape and reel (1,000 pcs)

FEATURES

- Cost effective
- Excellent aging
- Wide frequency range
- Low profile
- Excellent reliability
- "AT strip" blank technology

PART NUMBERING GUIDE "EXAMPLE"

	FREQUENCY (16.0000 MHz)	LOAD CAPACITANCE*	PACKAGE TYPE**
ECS	- 160 -	20	- 4

* Load capacitance (xx=xx pF, S= series resonance), ** Package Type examples (4= 3.5mm max. height, 4L= 2.5mm max. height)
For extended temp range of -40 to +85°C ad -DN suffix for example ECS-160-20-4-DN
Note: See Product Selection Guide for additional options.

OPERATING CONDITIONS/ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	MINIMUM	MAXIMUM	UNITS
FREQUENCY RANGE	f_0	3.57	70.000	MHz
FREQUENCY TOLERANCE	@ +25°C		±30	PPM
FREQUENCY STABILITY, ref @ 25°C	Standard -10 ~ +70°C		±50	PPM
	"DN" Option -40 ~ +85°C		±100	PPM
OPERATING TEMPERATURE	Standard	-10	+70	°C
	DN option	-40	+85	°C
STORAGE TEMPERATURE		-40	+105	°C
SHUNT CAPACITANCE	C_0		7.0	pF
LOAD CAPACITANCE	C_L (Customer Specified)	10.0	Series	pF
DRIVE LEVEL	3.57 ~ 70.000MHz		0.5	mW
AGING (FIRST YEAR)	@ +25°C		±5.0	PPM

EQUIVALENT SERIES RESISTANCE / MODE OF OSCILLATION

FREQUENCY RANGE (MHz)	MODE	MAX ESR Ω	FREQUENCY RANGE (MHz)	MODE	MAX ESR Ω
3.570 ~ 3.999	Fundamental	200	9.000 ~ 12.999	Fundamental	60
4.000 ~ 4.999	Fundamental	150	13.000 ~ 19.999	Fundamental	40
5.000 ~ 5.999	Fundamental	120	20.000 ~ 30.000	Fundamental	30
6.000 ~ 6.999	Fundamental	100	27.000 ~ 70.000	3rd O/T	100
7.000 ~ 8.999	Fundamental	80			

PACKAGE DIMENSIONS (mm)

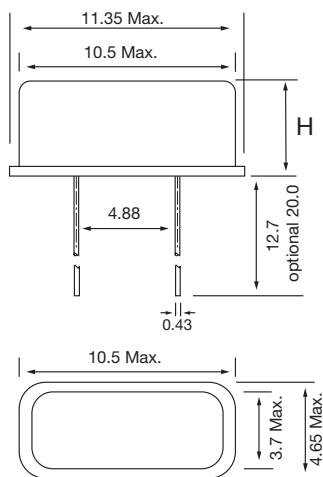


Figure 1) HC-49US - Top and Side views

Height "H" (max.)	
-4	3.5 mm
-4L	2.5 mm

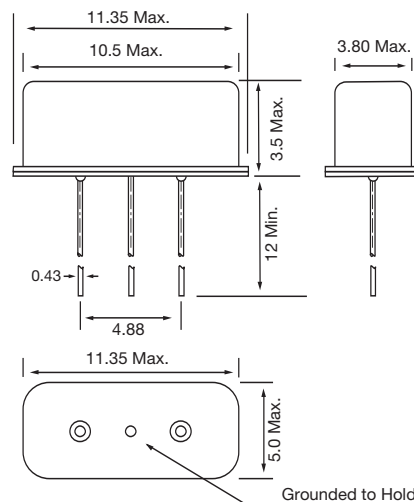


Figure 2) HC-49US - 3rd In Line Lead Base - Side & Bottom View

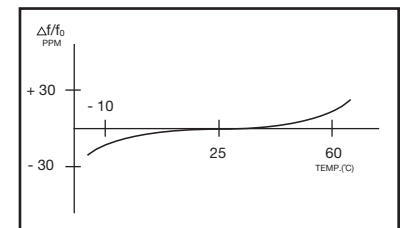


Figure 3) Frequency vs Temperature Curve

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ECS:

[ECS-80-18-4](#) [ECS-40.3-S-4](#) [ECS-250-18-4-F](#) [ECS-121-S-4](#) [ECS-160-S-4](#) [ECS-35-17-4](#) [ECS-49-20-4](#) [ECS-90-S-4](#)
[ECS-240-16-4](#) [ECS-44-20-4](#) [ECS-85-S-4](#) [ECS-52-S-4](#) [ECS-150-S-4](#) [ECS-98.3-S-4](#) [ECS-60-32-4](#) [ECS-61-32-4](#)
[ECS-40-20-4](#) [ECS-480-20-4](#) [ECS-49-S-4](#) [ECS-80-32-4](#) [ECS-36-18-4](#) [ECS-52-32-4](#) [ECS-110-S-4](#) [ECS-80-S-4](#)
[ECS-73-S-4](#) [ECS-40.3-20-4](#) [ECS-42-16-4](#) [ECS-120-20-4](#) [ECS-36-S-4](#) [ECS-120-S-4](#) [ECS-240-20-4](#) [ECS-180-S-4](#)
[ECS-184-20-4](#) [ECS-120-32-4](#) [ECS-100-S-4](#) [ECS-143-S-4](#) [ECS-51-S-4](#) [ECS-200-S-4](#) [ECS-80-20-4](#) [ECS-240-S-4](#)
[ECS-42-12-4](#) [ECS-50-20-4](#) [ECS-153-20-4](#) [ECS-51-20-4](#) [ECS-92.1-S-4](#) [ECS-160-20-4](#) [ECS-40-S-4](#) [ECS-41-20-4](#)
[ECS-200-20-4](#) [ECS-60-S-4](#) [ECS-50-S-4](#) [ECS-73-20-4](#) [ECS-35-S-4](#) [ECS-65-20-4](#)