Mounting Option
04-.156 (3.96) Dia. Mounting Holes

Contact Detail
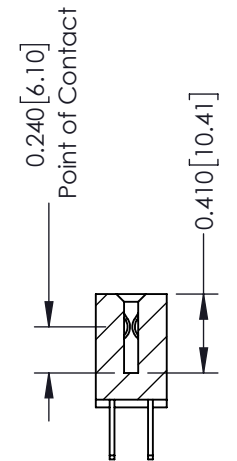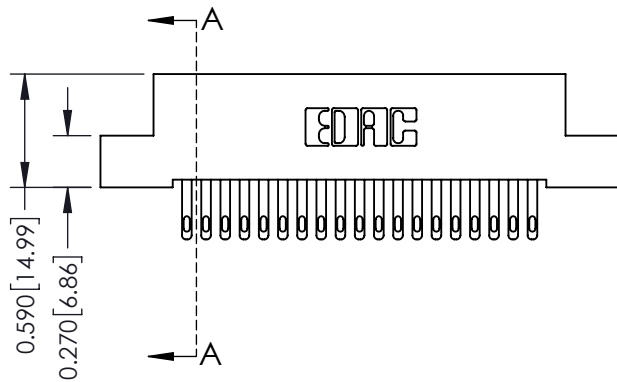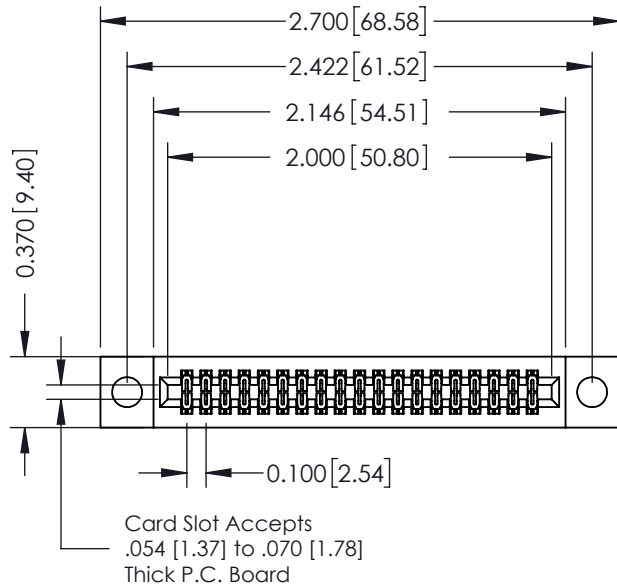500-Wire Hole .050x.025(1.27x0.64) - Tail LG=.270(6.86)
.100 [2.54] Contact Spacing x .200 [5.08] Row Spacing

2.700 [68.58]
2.422 [61.52]
2.146 [54.51]
2.000 [50.80]

0.370 [9.40]

0.100 [2.54]

Card Slot Accepts
.054 [1.37] to .070 [1.78]
Thick P.C. Board

A

A

0.590 [14.99]
0.270 [6.86]

0.240 [6.10]
Point of Contact

0.410 [10.41]

SECTION A-A

EDAC

See Accompanying Pages for:
• **Contact Bend Details**
• **Mounting Options**

342 / 392 Card Edge Connector
Part Number: 342-038-500-204

0.120 [3.05]
0.255 [6.48]

.125 [3.18] to .210 [5.33]
Outside Tails

.045 [1.14] to .060 [1.52]
Between Tails

555 Contact Code

0.095 [2.41]
0.180 [4.57]

.125 [3.18] to .185 [4.70]
Outside Tails

.045 [1.14] to .060 [1.52]
Between Tails

556 Contact Code

0.645 [16.38]
0.245 [6.22]

0.200 [5.08]
0.060 [1.52]

558 Contact Code

0.645 [16.38]
0.295 [7.49]

0.150 [3.81]
0.060 [1.52]

559 Contact Code

0.165 [4.19]
0.385 [9.78]

.125 [3.18] to .210 [5.33]
Outside Tails

.045 [1.14] to .060 [1.52]
Between Tails

560 Contact Code

342 / 392 Series Card Edge Connector
Contact Bend Detail

EDAC INC
TORONTO, ONTARIO
CANADA

YOUR CONNECTION TO QUALITY & SERVICE

ISSUE NUMBER

ORIGINAL

.010 [0.25]
Radial Float

0.116 [2.95] I.D.
Floating Eyelets

0.250 [6.35] Dia.

.128 [3.25] x
.146 [3.71] Slot

.156 [3.96] Dia
Through Holes

M3-0.5 Metric
Threaded Insert

#4-40 UNC
Threaded Insert

0.135 [3.43]

0.005 [0.13]

0.348 [8.84]

.128 [3.25] Dia
Through Holes

Code x01   Code x02   Code x03   Code x04   Code x07   Code x08   Code x12

342 / 392 Card Edge Connector
Mounting Options

EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[EDAC](#):
  [342-038-500-204](#)