


Card Edge Connector 0.156" (3.96mm) Pitch

Features:

- 0.156" (3.96mm) contact spacing x 0.200" (5.08mm) row spacing
- Accepts 0.062" (1.57mm) nominal thickness P.C. board
- Low profile insulator body, 0.473" (12.01mm)
- Contact termination 0.045" (1.14mm) square wire wrap
- Single or dual row configurations
- Large variety of mounting options
- Pre-assembled card guides available
- Accepts between contact and in-contact polarizing keys
- RoHS Compliant



Specifications:

Insulator Material	UL 94V-0 DAP(Diallyl Phthalate), Green Color
Contact Material	Copper Alloy
Contact Plating	Gold plating all over with Nickel underplating
Current Rating	5 amps
Contact Resistance	10 milliohms maximum
Dielectric Withstanding Voltage	1800 V AC rms at sea level between adjacent contacts
Insulation Resistance	5000 megaohms minimum
Operating Temperature	-65°C to +125°C
Insertion Force	16 oz (4.45 N) maximum per contact pair when tested with .070" (1.78mm) thick gauge
Withdrawal Force	1 oz (0.28 N) minimum per contact pair when tested with .054" (1.37mm) thick gauge

Example Part Number: 338-044-541-208

Series

Total Number of Contacts

Contact Code

Contact Rows

Mounting Options

Series:
338

Total Number of Contacts:
010, 015, 018, 022 or 028
020, 030, 036, 044 or 056

Contact Rows:
Single Row
Dual Row

Contact Code:
541

Tail Description:
Wire Wrap

Tail Size:
.045 Square (1.14 Square)

Tail Length "G":
.730 (18.54)

Contact Rows:
1
2


Description:
Single Row
Dual Row

Mounting Options:
01
02
03
04
07
08
58
68
78


Description:
No Mounting Lug
Ø.128" (Ø3.25mm) Mounting Holes
Ø.116" (Ø2.95mm) I.D. Floating Eyelets
Ø.156" (Ø3.96mm) Mounting Holes
M3-0.5 Metric Threaded Inserts
#4-40 Unified Threaded Inserts
.468" (11.89mm) Offset Card Guides
.344 (8.74) Offset Card Guides
In-Line Card Guides

Ordering Code Notes:
For details of the mounting options refer to page 3.






Card Edge Connectors 0.156" (3.96mm) Pitch

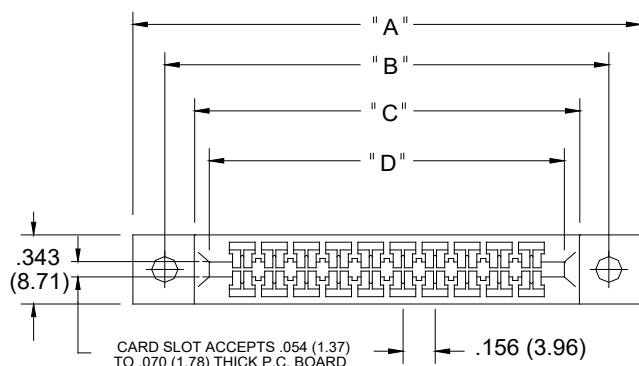


IN-CONTACT
POLARIZING KEY
P/N 338-240-328



BETWEEN CONTACT
POLARIZING KEY
P/N 306-240-318

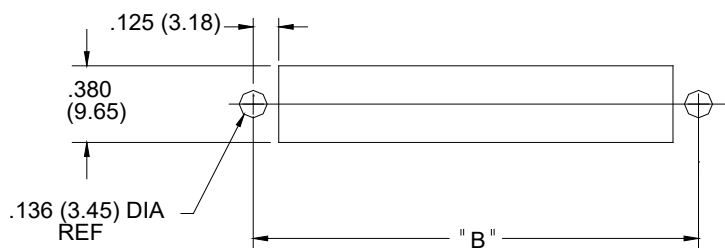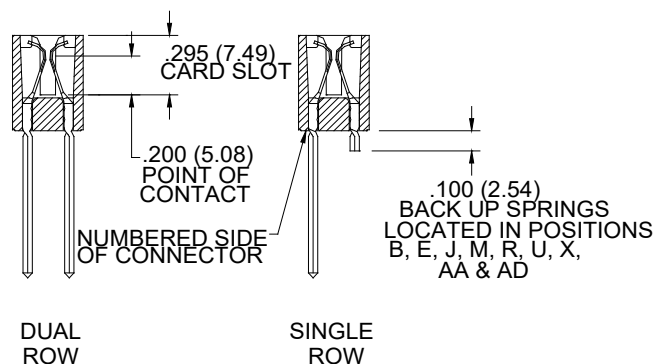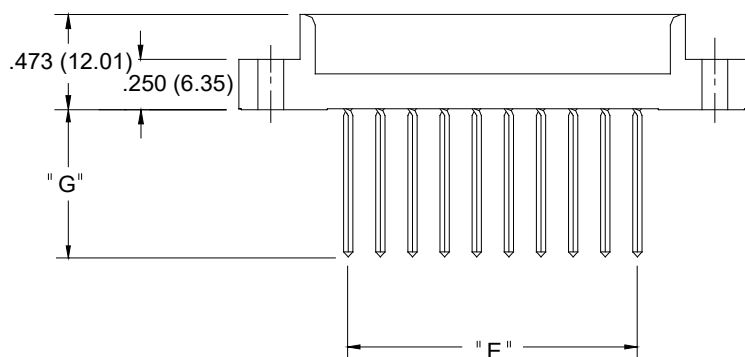



CONNECTOR MOUNTING PATTERN
PANEL MOUNT CUT OUT

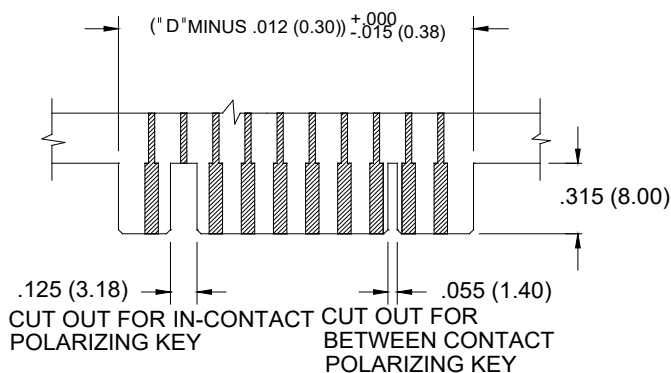

RECOMMENDED DAUGHTER BOARD

NUMBER OF CONTACTS		"A"		"B"		"C"		"D"		"E"	
Single	Double	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm
10	20	2.466	62.64	2.156	54.76	1.870	47.50	1.724	43.79	1.404	35.66
15	30	3.246	82.45	2.936	74.57	2.650	67.31	2.504	63.60	2.184	55.47
18	36	3.714	94.34	3.404	86.46	3.118	79.20	2.972	75.49	2.652	67.36
22	44	4.338	110.19	4.028	102.31	3.742	95.05	3.596	91.34	3.276	83.21
28	56	5.274	133.96	4.964	126.09	4.678	118.82	4.532	115.11	4.212	106.98

Card Edge Connectors 0.156" (3.96mm) Pitch

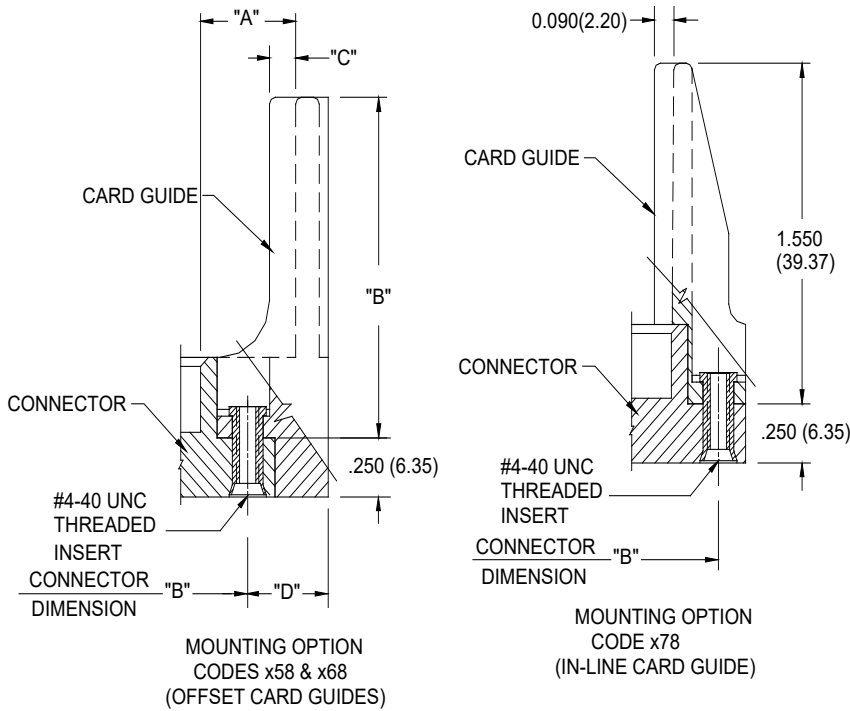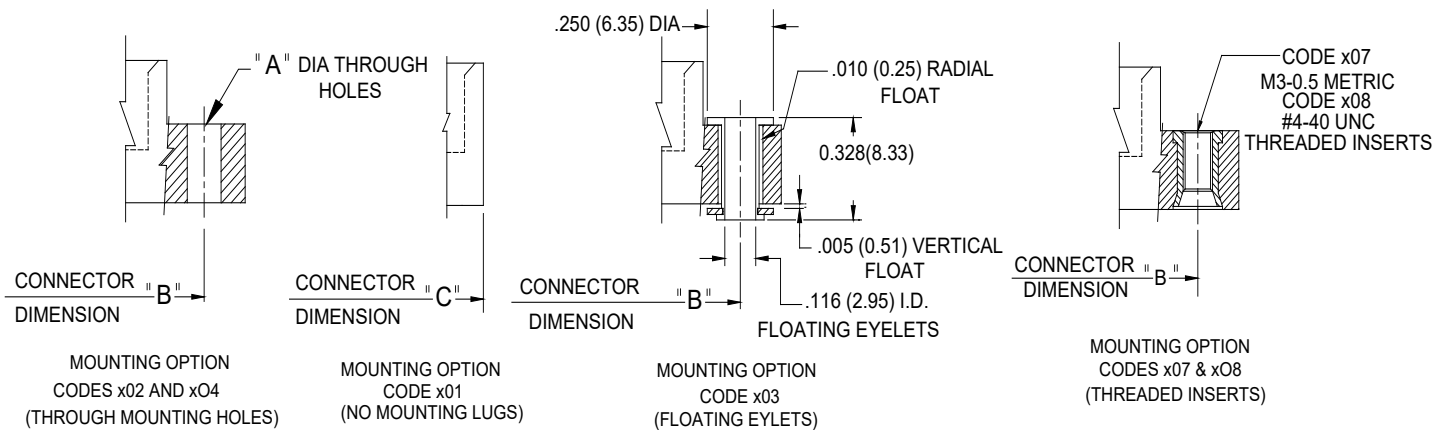

CODE X02 AND X04- THROUGH MTG. HOLES			CODES X58 AND X68- OFFSET CARD GUIDES		
	CODE X02	CODE X04		CODE X58	CODE X68
"A" DIA.	0.128(3.25)	0.156(3.96)	"A"	0.468(11.89)	0.344(8.74)
CODE X07 AND X08- THREADED INSERTS			"B"	2.755(69.98)	2.505(63.63)
	CODE X07	CODE X08	"C"	0.125(3.18)	0.060(1.52)
INSERT	M3-0.5(METRIC)	#4-40 UNC	"D"	0.423(10.74)	0.242(6.15)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

[338-020-541-278](#) [338-018-541-158](#) [338-010-541-103](#) [338-020-541-201](#) [338-028-541-168](#) [338-030-541-201](#) [338-036-541-204](#) [338-036-541-278](#) [338-022-541-108](#) [338-015-541-107](#) [338-028-541-178](#) [338-018-541-104](#) [338-020-541-204](#) [338-044-541-201](#) [338-030-541-204](#) [338-010-541-108](#) [338-056-541-268](#) [338-015-541-101](#) [338-044-541-278](#) [338-056-541-204](#) [338-030-541-278](#) [338-022-541-103](#) [338-028-541-104](#) [338-010-541-168](#) [338-020-541-258](#) [338-036-541-201](#) [338-015-541-158](#) [338-015-541-103](#) [338-056-541-258](#) [338-036-541-258](#) [338-030-541-258](#) [338-010-541-158](#) [338-020-541-268](#) [338-018-541-178](#) [338-010-541-178](#) [338-056-541-201](#) [338-022-541-104](#) [338-018-541-101](#) [338-022-541-158](#) [338-018-541-103](#) [338-036-541-268](#) [338-030-541-268](#) [338-056-541-278](#) [338-015-541-168](#) [338-044-541-204](#) [338-044-541-258](#) [338-010-541-104](#) [338-018-541-168](#) [338-028-541-108](#) [338-022-541-178](#) [338-044-541-268](#) [338-022-541-101](#) [338-028-541-101](#) [338-018-541-108](#) [338-010-541-107](#) [338-028-541-158](#)