


627C/628C SERIES



Power Combo D-Sub Connectors: Vertical

Features:

- Signal, along with power or coaxial contacts within one connector
- Space saving on the PCB and I/O designs
- Available in various pin out configurations
- Pin and socket contact mating design with P.C. tail and solder cup termination
- Metal shell provides EMI/RFI shielding, plug shell indents provide grounding and additional mating retention
- Mounting options for panel mount or connector mating include through hole, threaded hole and threaded standoffs
- D-shaped connector mating outline provides polarization



Specifications:

	Power/Coaxial Only	Combination
Insulator Material	Thermoplastic Polyester, UL 94V-0, Color: Black	
Contact Material	Copper Alloy	
Contact Plating	Selective Gold (See Ordering Code) over Nickel for the Mating Area, Tin Plating for Tail Area	
Shell Material and Plating	Steel, Sn or Ni Plated	
Shell Material	Nickel Plated Steel	
Current Rating (Power Contacts)	10 amps, 20 amps, 30 amps, 40 amps	
Current Rating (Signal Contacts)		5 amps
Voltage Rating	125 V	
Contact Resistance (Power Contacts)	1 Milliohms maximum	
Contact Resistance (Signal Contacts)		10 Milliohms maximum
Insulation Resistance	5000 megaohms minimum	
Dielectric Withstanding Voltage	1000 V AC rms at Sea Level	
Operating Temperature	-55°C To +125°C	
Mating Cycle	500 For 30 Microinches Gold Plating, 50 For Gold Flash Plating	

Ordering Code:

627-2W2-220-1N2

SERIES: _____
627: PLUG (PIN)
628: RECEPTACLE (SOCKET)

LAYOUT: _____

	POWER/CO-AX ONLY		COMBINATION			
SIZE 9 CONTACT SHELL	2W2	2WK2	5W1			
SIZE 15 CONTACT SHELL	3W3	3WK3	7W2	11W1		
SIZE 25 CONTACT SHELL	5W5		9W4	13W3	17W2	21W1
SIZE 37 CONTACT SHELL	8W8		13W6	17W5	25W3	27W2 21W4
SIZE 50 CONTACT SHELL			24W7	36W4	43W2	47W1

8W8 2WK2
└─ TOTAL NO. OF POWER OR CO-AX CONTACT ─┐
└─ TOTAL NO. OF CONTACT ─┐ └─ MALE FEMALE COMBINATION























CONTACT PLATING THICKNESS: _____
2 - GOLD FLASH PLATING
6 - 30 MICROINCHES OF GOLD PLATING
TAIL TYPE: _____
22 - SOLDER CUP
24 - PC TAIL

MOUNTING OPTIONS:
1 - THROUGH HOLE
2 - #4-40 UNC THREADED HOLE 2.70
3 - #4-40 UNC THREADED HOLE 7.40 (PC TAIL ONLY)
4 - #4-40 UNC THREADED STANDOFF (PC TAIL ONLY)
5 - #4-40 UNC THREADED HOLE WITH BOARDLOCKS (PC TAIL ONLY)
6 - #4-40 UNC THREADED STANDOFF WITH BOARDLOCKS (PC TAIL ONLY)
A - M3 THREADED HOLE 2.70
B - M3 THREADED HOLE 7.40 (PC TAIL ONLY)
C - M3 THREADED STANDOFF (PC TAIL ONLY)
D - M3 THREADED HOLE WITH BOARDLOCKS (PC TAIL ONLY)
E - M3 THREADED STANDOFF WITH BOARDLOCKS (PC TAIL ONLY)

SHELL PLATING:
N - NICKEL
T - TIN

RATING:
POWER CONTACT COAXIAL CONTACT
CURRENT RATING: IMPEDANCE RATING:
1 - 10A 5 - 50 OHMS
2 - 20A 7 - 75 OHMS
3 - 30A
4 - 40A


Layout:

	POWER/COAXIAL D-SUB ONLY		COMBINATION	
SIZE 9	 2W2	 2WK2	 5W1	
SIZE 15	 3W3	 3WK3	 7W2	 11W1
SIZE 25	 5W5		 9W4	 13W3
			 17W2	 21W1
SIZE 37	 8W8		 13W6	 17W5
			 25W3	 27W2
			 21W4	
SIZE 50			 24W7	 36W4
			 43W2	 47W1


Power Combo D-Sub Connectors: Vertical

STRAIGHT PCB TYPE MOUNTING OPTION


CODE:1




CODE:2/A




CODE:3/B




CODE:4/C



CODE:5/D




CODE:6/E




PCB LAYOUT FOR POWER D-SUB MALE AND FEMALE CONNECTOR


CODE:2W2/2WK2




CODE:3W3/3WK3




CODE:5W5 MALE




CODE:8W8 MALE

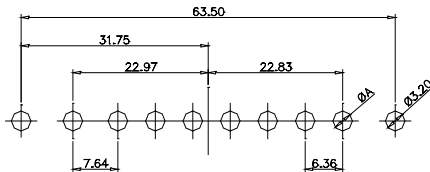

CODE:5W5 FEMALE




CODE:8W8 FEMALE

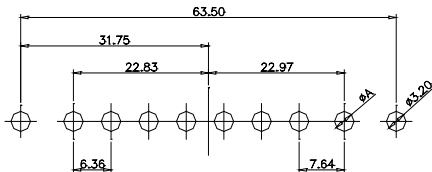

CURRENT RATING	10A	20A	30A	40A
ØA(mm)	2.2	3.3	3.7	4.2


Power/Coaxial D-SUB

STRAIGHT PCB TYPE MOUNTING OPTION

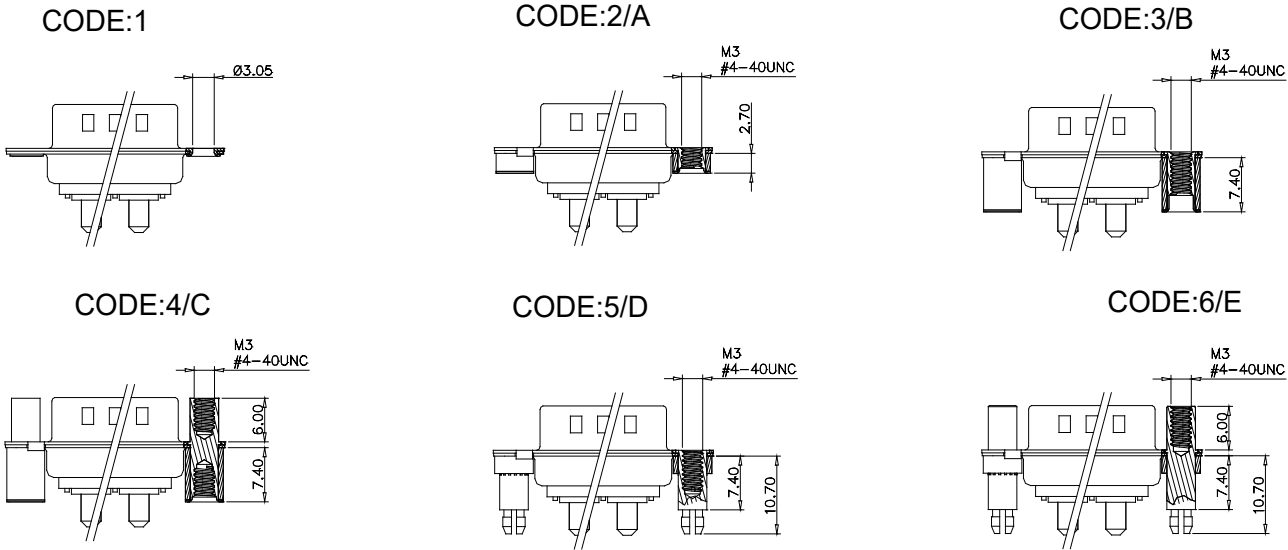


PCB LAYOUT FOR POWER D-SUB MALE AND FEMALE CONNECTOR


CODE:2W2/2WK2




CODE:3W3/3WK3




CODE:5W5 MALE




CODE:8W8 MALE

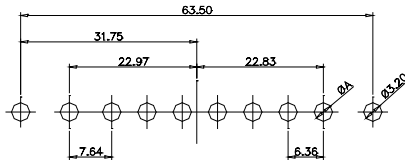

CODE:5W5 FEMALE




CODE:8W8 FEMALE

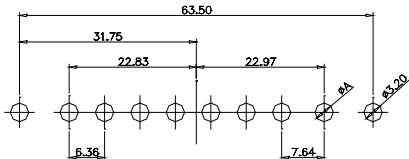


CURRENT RATING	10A	20A	30A	40A
$\varnothing A(mm)$	2.2	3.3	3.7	4.2

PCB LAYOUT FOR COAXIAL D-SUB MALE AND FEMALE CONNECTOR


CODE:2W2/2WK2




CODE:3W3/3WK3

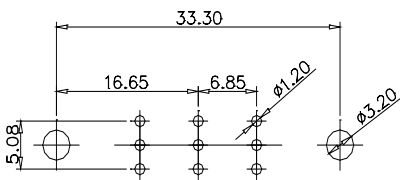


CODE:5W5 MALE

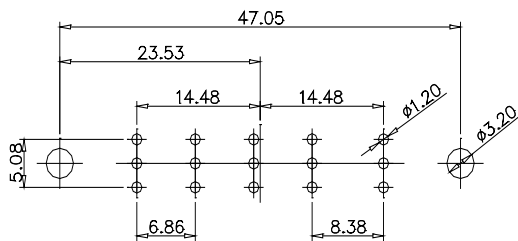


CODE:8W8 MALE

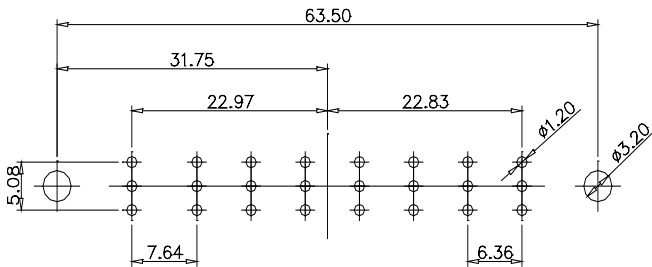

CODE:5W5 FEMALE

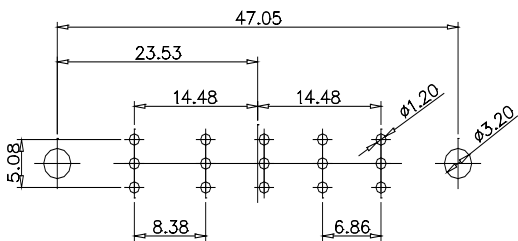


CODE:8W8 FEMALE

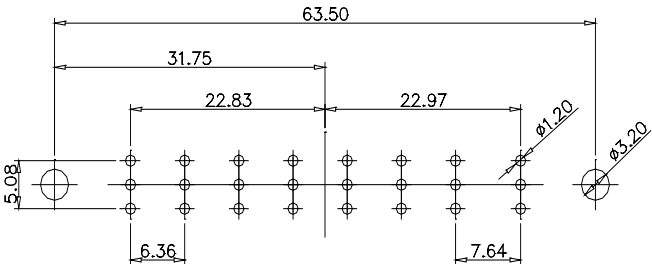

Power Combo D-Sub Connectors: Vertical


SOLDER CUP TYPE

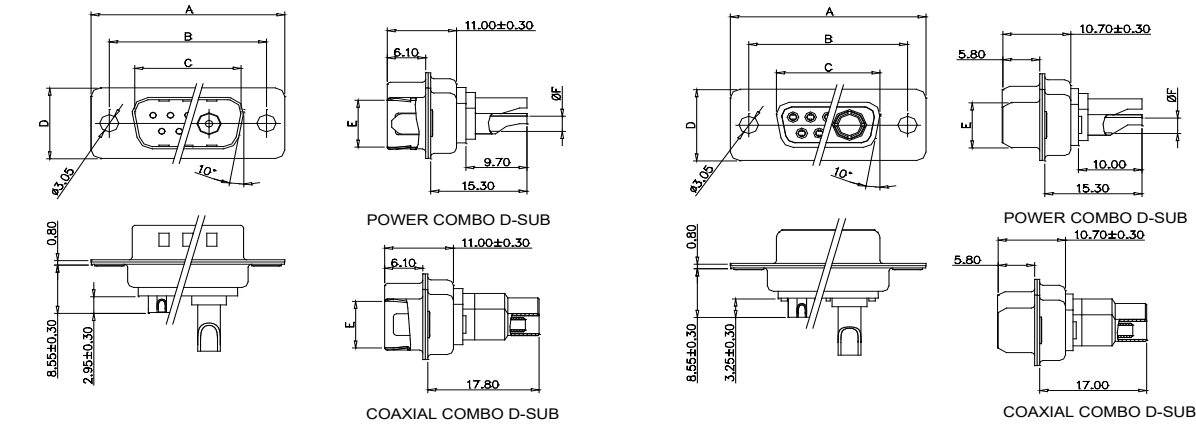

CONTACT SHELL SIZE	POWER D-SUB						
	DIMA	DIMB	DIMC	DIMD	DIME	RATING	ØF
SIZE 9	30.80	25.00	16.90	12.50	8.30	10A	1.7
SIZE 15	39.20	33.30	25.25	12.50	8.30	20A	2.7
SIZE 25	53.05	47.05	38.95	12.50	8.30	30A	3.5
SIZE 37	69.40	63.50	55.40	12.50	11.15	40A	4.6
SIZE 50	67.00	61.00	52.80	15.30	11.15		
COAXIAL D-SUB							

CONTACT SHELL SIZE	POWER D-SUB						
	DIMA	DIMB	DIMC	DIMD	DIME	RATING	ØF
SIZE 9	30.80	25.00	16.30	12.50	7.90	10A	1.7
SIZE 15	39.20	33.30	24.60	12.50	7.90	20A	2.7
SIZE 25	53.05	47.05	38.40	12.50	7.90	30A	3.5
SIZE 37	69.40	63.50	54.80	12.50	7.90	40A	4.6
SIZE 50	67.00	61.00	52.20	15.30	10.90		
COAXIAL D-SUB							

STRAIGHT PCB TYPE

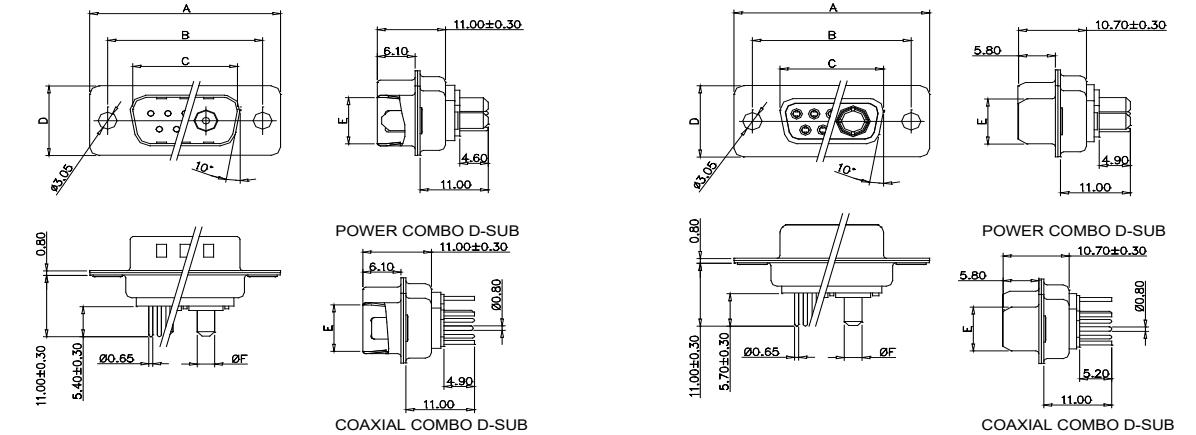


CONTACT SHELL SIZE	POWER D-SUB						
	DIMA	DIMB	DIMC	DIMD	DIME	RATING	ØF
SIZE 9	30.80	25.00	16.90	12.50	8.30	10A	1.7
SIZE 15	39.20	33.30	25.25	12.50	8.30	20A	2.8
SIZE 25	53.05	47.05	38.95	12.50	8.30	30A	3.2
SIZE 37	69.40	63.50	55.40	12.50	11.15	40A	3.75
SIZE 50	67.00	61.00	52.80	15.30	11.15		
COAXIAL D-SUB							


CONTACT SHELL SIZE	POWER D-SUB						
	DIMA	DIMB	DIMC	DIMD	DIME	RATING	ØF
SIZE 9	30.80	25.00	16.30	12.50	7.90	10A	1.7
SIZE 15	39.20	33.30	24.60	12.50	7.90	20A	2.8
SIZE 25	53.05	47.05	38.40	12.50	7.90	30A	3.2
SIZE 37	69.40	63.50	54.80	12.50	7.90	40A	3.75
SIZE 50	67.00	61.00	52.20	15.30	10.90		
COAXIAL D-SUB							

SOLDER CUP TYPE MOUNTING OPTION

CODE:1




CODE:A




Power & Coaxial Combo D-SUB

STRAIGHT PCB TYPE MOUNTING OPTION


CODE:1

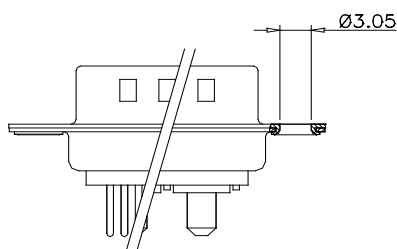


CODE:2/A

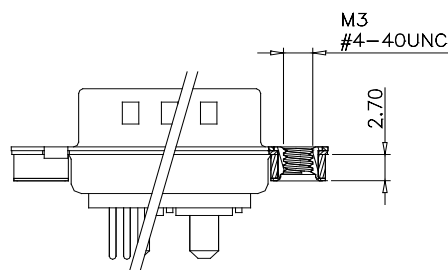


CODE:3/B

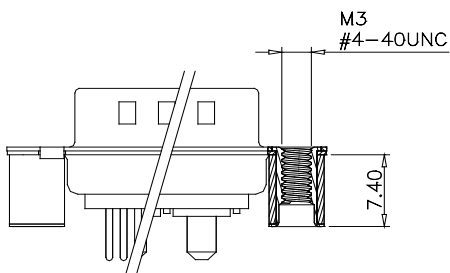


CODE:4/C

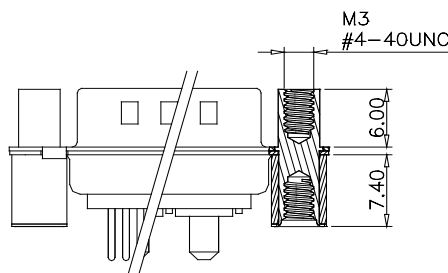

CODE:5/D

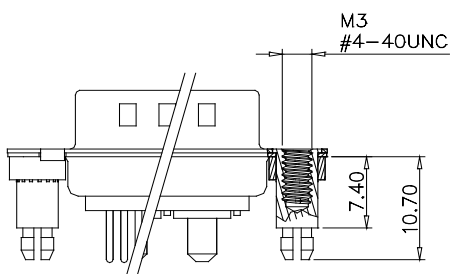


CODE:6/E

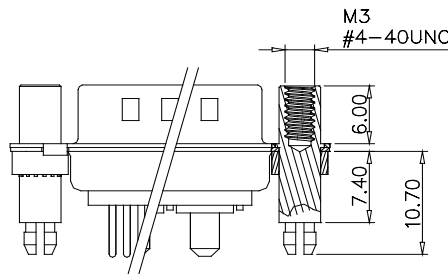


Power Combo D-SUB

PCB LAYOUT FOR MALE AND FEMALE CONNECTOR


CODE:5W1
MALE/FEMALE




CODE:7W2
MALE/FEMALE

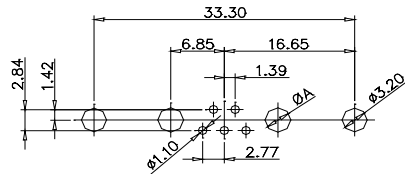


CODE:11W1
MALE/FEMALE

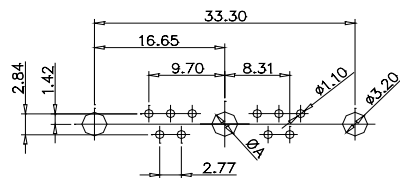


CODE:17W2
MALE/FEMALE

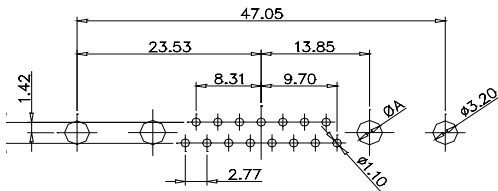


CODE:24W7
MALE/FEMALE

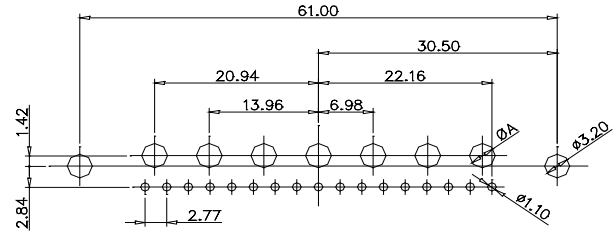


CODE:21W4
MALE/FEMALE

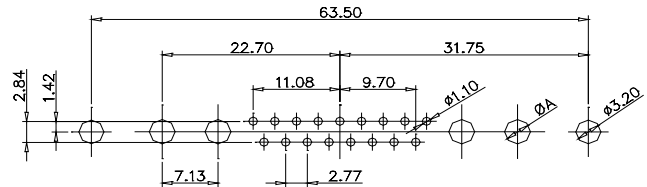

CODE:27W2
MALE/FEMALE

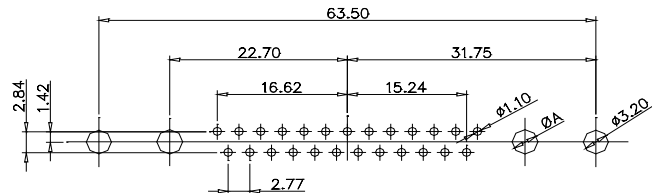

CODE:21W1
MALE/FEMALE

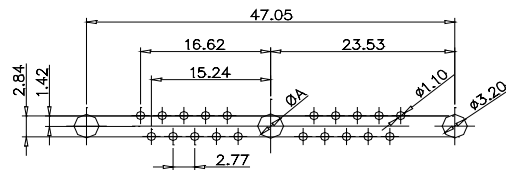


CUREENT RATING	10A	20A	30A	40A
ØA(mm)	2.2	3.3	3.7	4.2


Power Combo D-SUB

PCB LAYOUT FOR MALE CONNECTOR


CODE:9W4
MALE

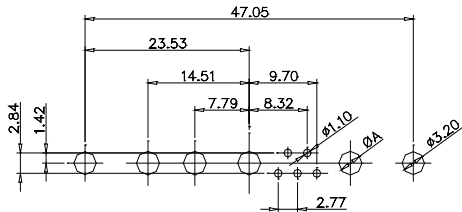


CODE:25W3
MALE

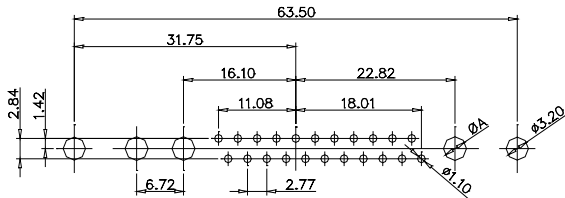


CODE:13W3
MALE

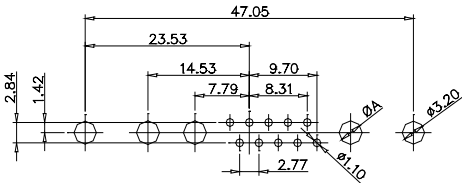


CODE:36W4
MALE

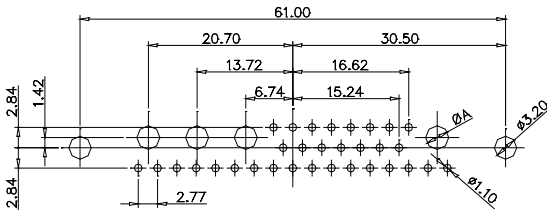


CODE:13W6
MALE

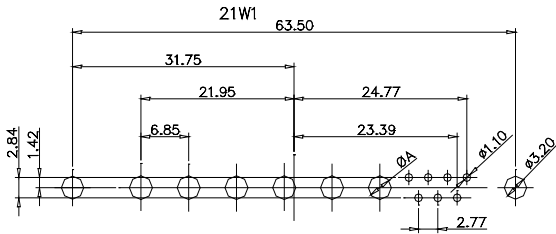


CODE:43W2
MALE

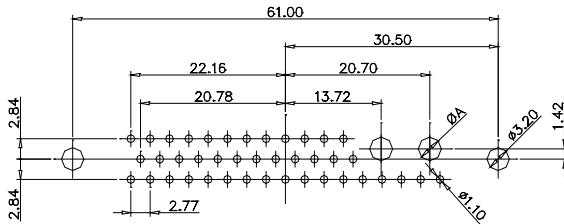

CODE:17W5
MALE

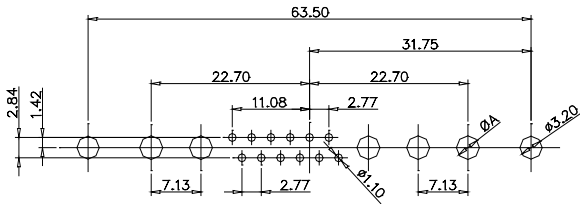


CODE:47W1
MALE

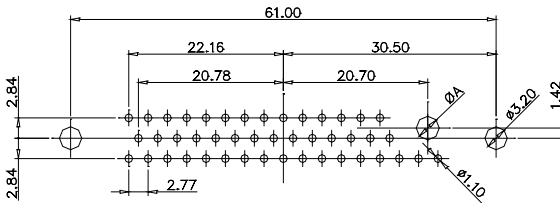


CUREENT RATING	10A	20A	30A	40A
ØA(mm)	2.2	3.3	3.7	4.2

PCB LAYOUT FOR FEMALE CONNECTOR


CODE:25W3
FEMALE

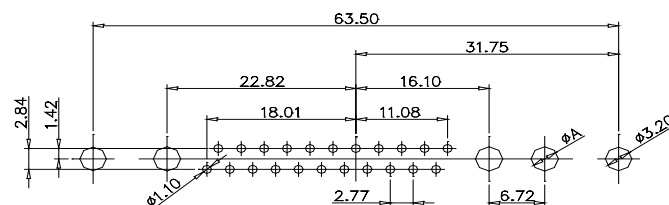


CODE:36W4
FEMALE

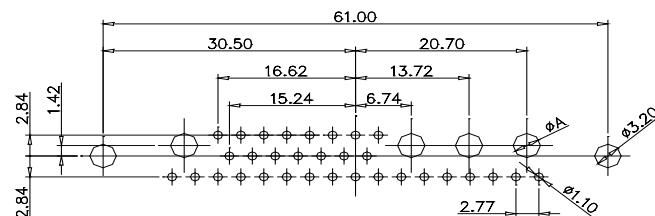

CODE:43W2
FEMALE

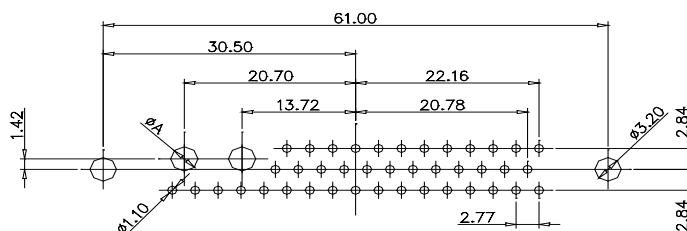

CODE:47W1
FEMALE

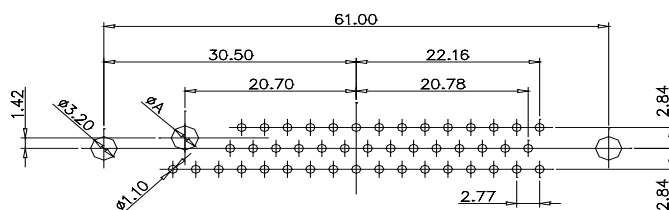


CUREENT RATING	10A	20A	30A	40A
ØA(mm)	2.2	3.3	3.7	4.2


Power Combo D-Sub Connectors: Vertical

STRAIGHT PCB TYPE MOUNTING OPTION


CODE:1




CODE:2/A




CODE:3/B




CODE:4/C



CODE:5/D




CODE:6/E




PCB LAYOUT FOR POWER D-SUB MALE AND FEMALE CONNECTOR


CODE:2W2/2WK2




CODE:3W3/3WK3




CODE:5W5 MALE




CODE:8W8 MALE

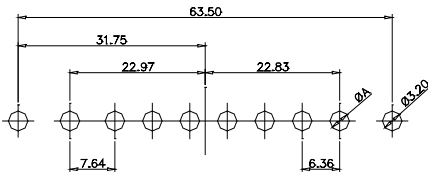

CODE:5W5 FEMALE




CODE:8W8 FEMALE

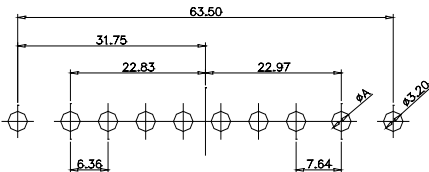


CURRENT RATING	10A	20A	30A	40A
ØA(mm)	2.2	3.3	3.7	4.2

Coaxial Combo D-SUB


5W1 Male/Female




24W7 Male/Female

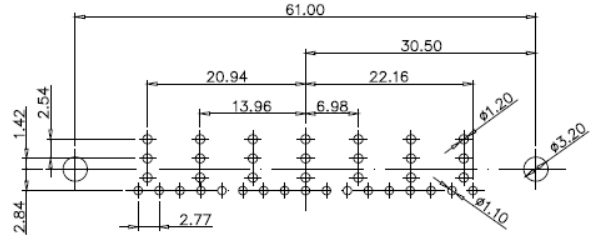


7W2 Male/Female

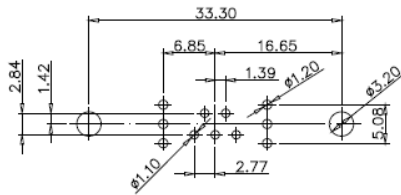


21W4 Male/Female

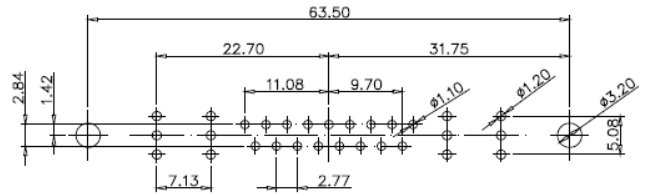


11W1 Male/Female

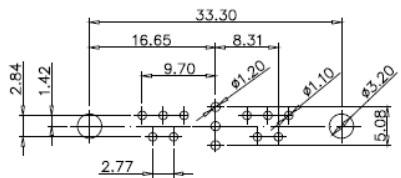


27W2 Male/Female

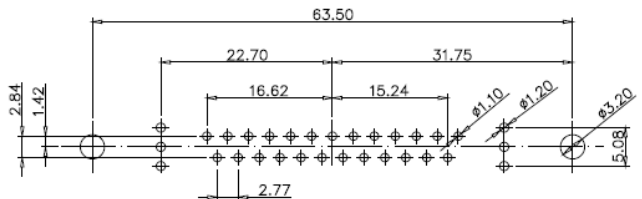

17W2 Male/Female

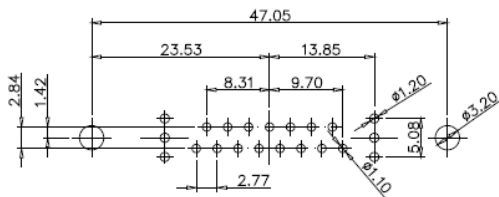


21W1 Male/Female

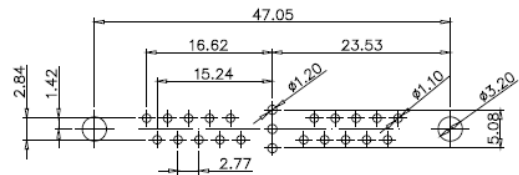


Coaxial Combo D-SUB


9W4 Male

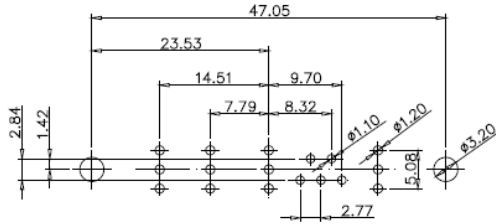


25W3 Male

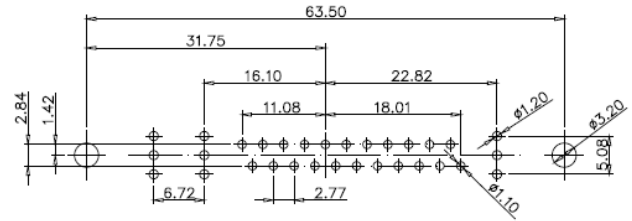


13W3 Male

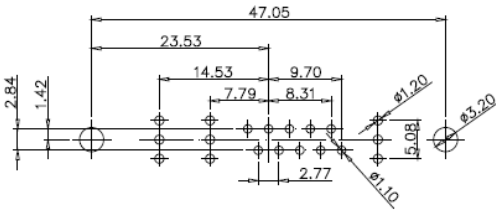


36W4 Male

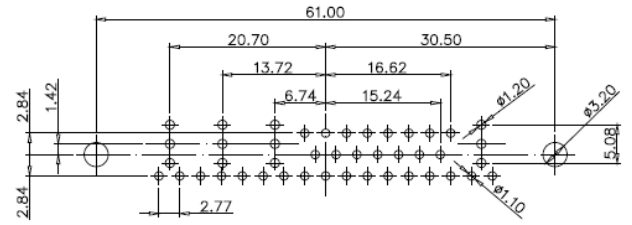


13W6 Male

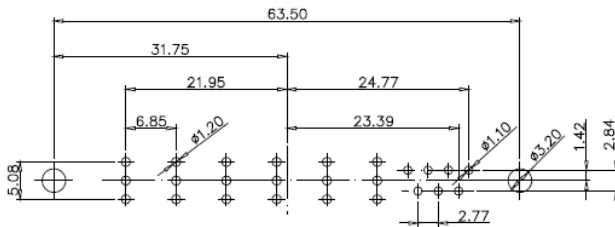


43W2 Male

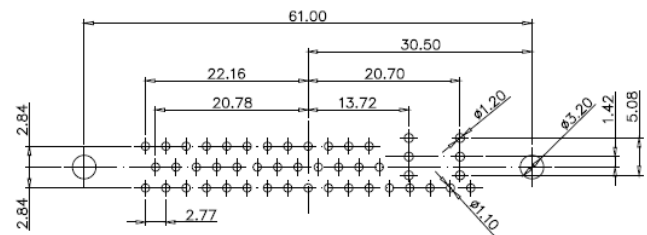

17W5 Male

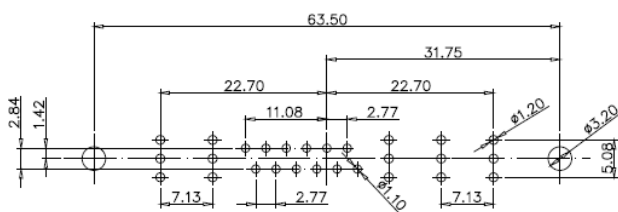

47W1 Male

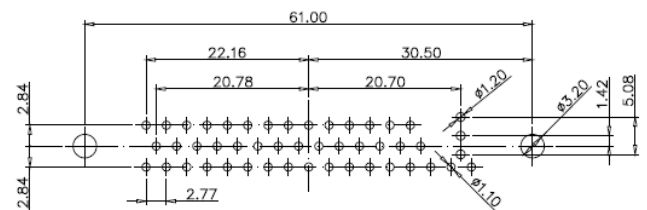


EDAC


Power Combo D-Sub Connectors: Vertical

Coaxial Combo D-SUB


9W4 Female

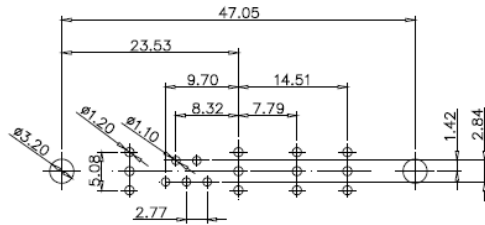


25W3 Female

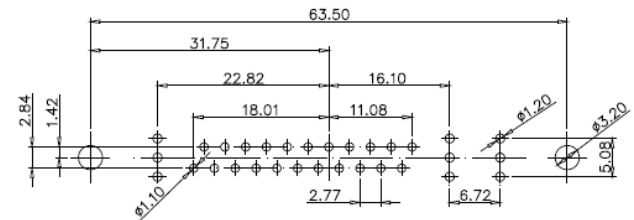


13W3 Female

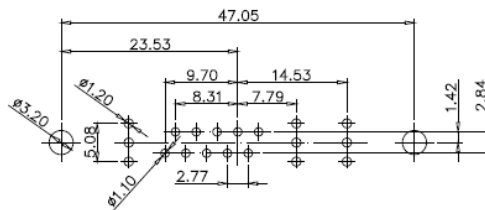


36W4 Female

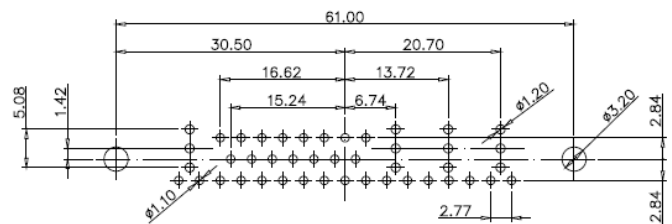


13W6 Female

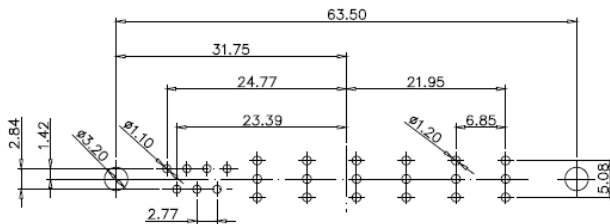


43W2 Female

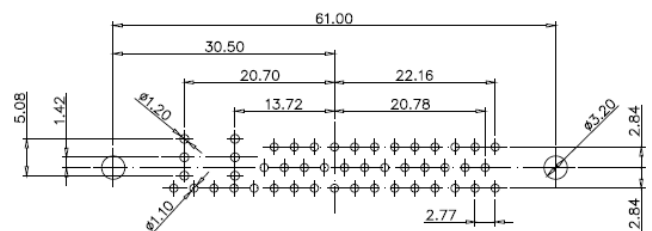

17W5 Female

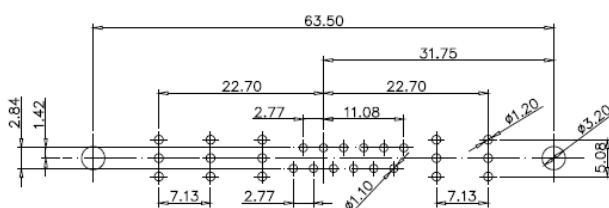

47W1 Female

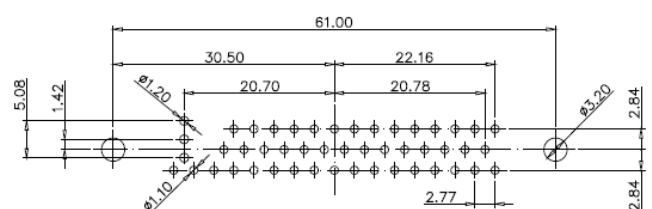

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

[627-13W3624-1T5](#) [627-13W6222-5NA](#) [627-13W6224-1T3](#) [627-13W6224-3T2](#) [627-13W6224-7N4](#) [627-17W5224-7N2](#) [627-17W5624-2TE](#) [627-17W5624-4TD](#) [627-21W1222-4NA](#) [627-21W1224-4TB](#) [627-24W7224-2TA](#) [627-24W7224-4T6](#) [627-24W7224-5TA](#) [627-24W7624-1T4](#) [627-24W7624-4T4](#) [627-27W2624-2T3](#) [627-2W2-222-1T1](#) [627-2W2-624-1NC](#) [627-36W4624-3TC](#) [627-36W4624-5TB](#) [627-36W4624-7TC](#) [627-3W3-224-2T6](#) [627-43W2224-3T5](#) [627-43W2622-5T1](#) [627-43W2624-2T2](#) [627-43W2624-3T3](#) [627-43W2624-5T2](#) [627-47W1222-5N2](#) [627-47W1224-2NE](#) [627-7W2-224-2N6](#) [627-7W2-224-7TA](#) [627-7W2-624-2N4](#) [627-8W8-224-1N1](#) [627-8W8-224-5T2](#) [627-9W4-224-3TB](#) [627-9W4-624-7T3](#) [628-11W1222-2N2](#) [628-11W1622-1TA](#) [628-13W3224-2NC](#) [628-13W3224-7TD](#) [628-13W6624-2N3](#) [628-13W6624-4N2](#) [628-17W2624-7T6](#) [628-21W1224-7NE](#) [628-21W1622-7N2](#) [628-21W1624-3TA](#) [628-21W4224-7T2](#) [628-21W4624-3NE](#) [628-25W3222-5T1](#) [628-25W3224-5N4](#) [628-25W3622-5N2](#) [628-25W3624-5N2](#) [628-27W2224-3NA](#) [628-2WK2222-3N1](#) [628-2WK2224-4TC](#) [628-36W4222-3NA](#) [628-36W4224-4T2](#) [628-3W3-624-4NA](#) [628-3W3-624-7N6](#) [628-3WK3224-1T3](#) [628-3WK3224-7N4](#) [628-3WK3624-4NC](#) [628-43W2224-1NA](#) [628-47W1224-4N3](#) [628-47W1224-7N2](#) [628-47W1624-1N1](#) [628-47W1624-2TE](#) [628-47W1624-5TE](#) [628-7W2-222-7NA](#) [628-7W2-224-2TA](#) [628-7W2-224-5NC](#) [628-9W4-622-5T2](#) [628-9W4-624-5N5](#) [627-11W1222-7N2](#) [627-13W3224-4T4](#) [627-13W3224-5ND](#) [627-13W3624-4T2](#) [627-13W3624-5NB](#) [627-13W6224-4NE](#) [627-13W6224-5N6](#) [627-13W6624-5N4](#) [627-17W5224-1NC](#) [627-17W5224-2N4](#) [627-17W5624-1NA](#) [627-17W5624-2N2](#) [627-21W1224-1N5](#) [627-21W1624-1N3](#) [627-21W1624-1TC](#) [627-21W4624-7T1](#) [627-24W7224-7ND](#) [627-24W7624-5T2](#) [627-24W7624-7NB](#) [627-27W2624-2NE](#) [627-27W2624-3N6](#) [627-2W2-224-2NC](#) [627-2W2-624-2NA](#) [627-2WK2224-2N5](#) [627-36W4224-7N2](#) [627-36W4622-3N2](#) [627-36W4624-7T6](#)