


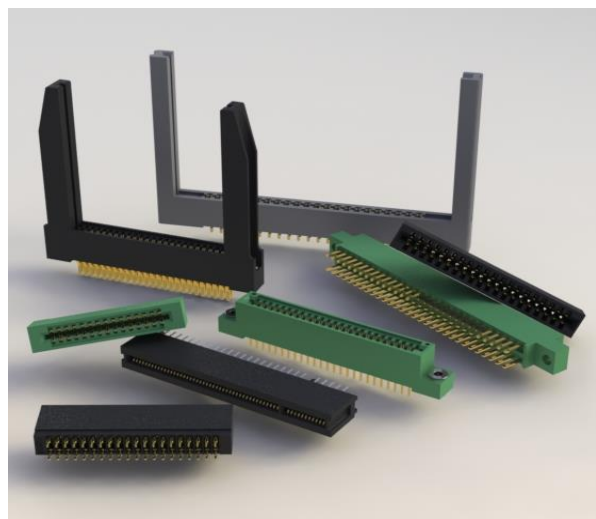

FEATURES:

- UL Recognized
- .100" (2.54mm) Contact Spacing x .140" (3.56mm) Row Spacing
- Accepts .062" (1.57mm) Nominal Thickness P.C. Board
- Low Profile Insulator Body, .437" (11.10mm)
- Contact Termination Options include P.C. Tail, Wire Hole and Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options
- Accepts between Contact and In-Contact Polarizing Keys
- RoHS Compliant & UL Certified

SPECIFICATIONS:

Insulator Material	UL 94V-0 Thermoplastic Polyester . DAP Material is available upon request
Contact Material	Copper Alloy
Contact Plating	Gold Plating on mating area and Tin Plating on tails with Nickel underplating all over
Current Rating	3 Amperes
Contact Resistance	10 milliohms maximum
Dielectric Withstanding Voltage	1200 VAC rms at sea level between adjacent contacts
Insulation Resistance	5000 Megaohms minimum
Operating Temperature	-40°C to +105°C
Insertion Force	16oz (4.45N) maximum per contact pair when tested with .070" (1.78mm) thick gauge
Withdrawal Force	1oz (0.28N) minimum per contact pair when tested with .054" (1.37mm) thick gauge

EXAMPLE PART NUMBER 341-062-520-202

Series _____
 Total Number of Contacts _____
 Contact Code _____
 Contact Rows _____
 Mounting Options _____

Contact Rows:

1
2

Description

Single Row
Dual Row

Mounting Options:

01
02
03
04
07
08

Description

No Mounting Lug
 Ø.128" (Ø3.25mm) Mounting Holes
 Ø.116" (Ø2.95mm) I.D. Floating Eyelets
 Ø.156" (Ø3.96mm) Mounting Holes
 M3-0.5 Metric Threaded Inserts
 #4-40 Unified Threaded Inserts

Series:

341
391

Insulator Color

Green
Black

Total Number of Contacts:

005, 006, 060
010, 012, 120


Contact Rows

Single Row
Dual Row

Contact Code	Description & Tail Size	Tail Length "G"
500	Wire Hole .050 x .013 (1.27 x 0.33)	.220 (5.59)
520	P.C. Tail .025 x .013 (0.64 x 0.33)	.125 (3.18)
521	P.C. Tail .025 x .013 (0.64 x 0.33)	.260 (6.60)
522	P.C. Tail .025 x .013 (0.64 x 0.33)	.375 (9.53)
524	P.C. Tail .025 x .013 (0.64 x 0.33)	.100 (2.54)
555	Extender Board Bend(Code 500 Contacts)	
556	Extender Board Bend(Code 521 Contacts)	
560	Extender Board Bend(Code 522 Contacts)	

Ordering Code Notes:

- 1) All connector sizes up to 60 contacts single row / 120 contacts dual row are available upon request.
- 2) The 500 contact code is only available in the 341 series. Green polyphenylene sulphide insulator material will be supplied.
- 3) For details of the extender board bends refer to next pages.
- 4) For details of the mounting options refer to page 3.

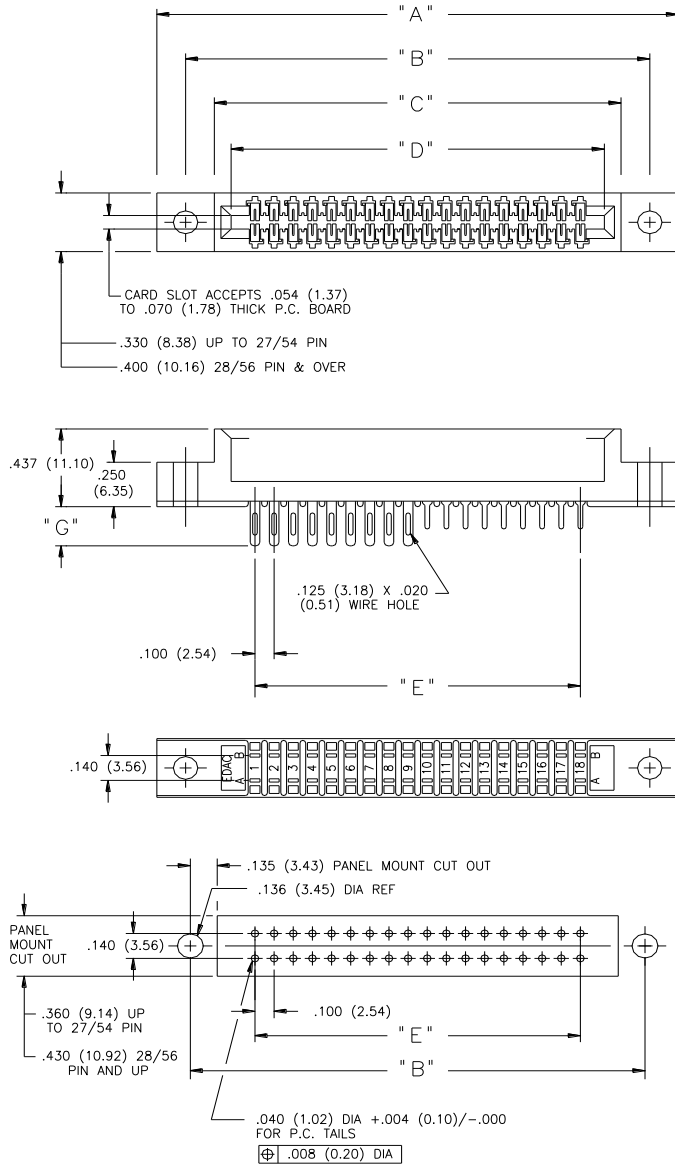


CONNECTOR MOUNTING PATTERN



IN-CONTACT
POLARIZING KEY
P/N 321-240-328



BETWEEN CONTACT
POLARIZING KEY
P/N 341-240-318







SECTION THROUGH
CONTACT POSITION


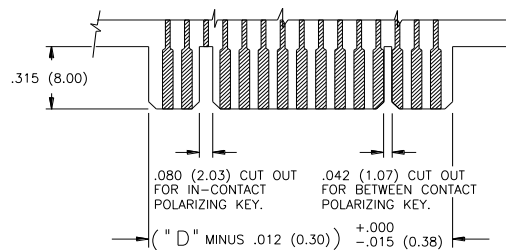



RECOMMENDED DAUGHTER BOARD

NUMBER OF CONTACTS		"A"		"B"		"C"		"D"		"D"	
SINGLE	DOUBLE	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM
5	10	1.375	(34.93)	1.075	(27.31)	0.775	(19.69)	0.600	(15.24)	0.400	(10.16)
6	12	1.475	(37.47)	1.175	(29.85)	0.875	(22.23)	0.700	(17.78)	0.500	(12.7)
10	20	1.875	(47.63)	1.575	(40.01)	1.275	(32.39)	1.100	(27.94)	0.900	(22.86)
15	30	2.375	(60.33)	2.075	(52.71)	1.775	(45.09)	1.600	(40.64)	1.400	(35.56)
18	36	2.675	(67.95)	2.375	(60.33)	2.075	(52.71)	1.900	(48.26)	1.700	(43.18)
22	44	3.075	(78.11)	2.775	(70.49)	2.475	(62.87)	2.300	(58.42)	2.100	(53.34)
25	50	3.375	(85.73)	3.075	(78.11)	2.775	(70.49)	2.600	(66.04)	2.400	(60.96)
28	56	3.675	(93.35)	3.375	(85.73)	3.075	(78.11)	2.900	(73.66)	2.700	(68.58)
30	60	3.875	(98.43)	3.575	(90.81)	3.275	(83.19)	3.100	(78.74)	2.900	(73.66)
36	72	4.475	(113.67)	4.175	(106.05)	3.875	(98.43)	3.700	(93.98)	3.500	(88.9)
40	80	4.875	(123.83)	4.575	(116.21)	4.275	(108.59)	4.100	(104.14)	3.900	(99.06)
43	86	5.175	(131.45)	4.875	(123.83)	4.575	(116.21)	4.400	(111.76)	4.200	(106.68)
50	100	5.875	(149.23)	5.575	(141.61)	5.275	(133.99)	5.100	(129.54)	4.900	(124.46)
60	120	6.875	(174.63)	6.575	(167.01)	6.275	(159.39)	6.100	(154.94)	5.900	(149.86)

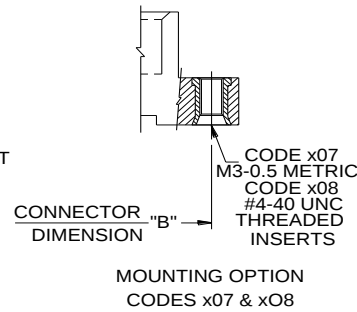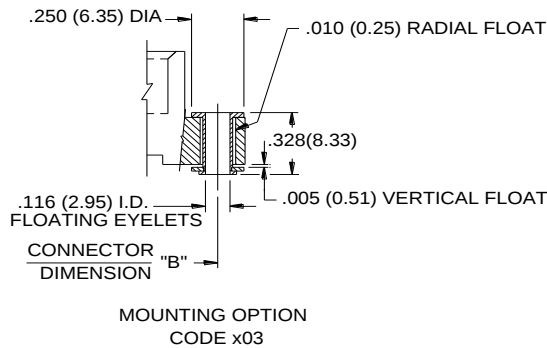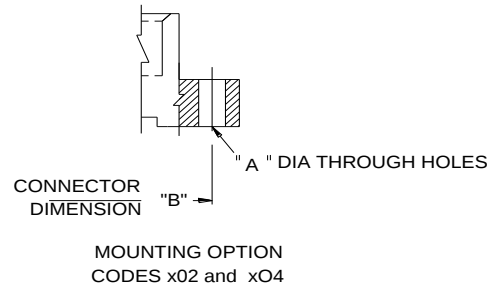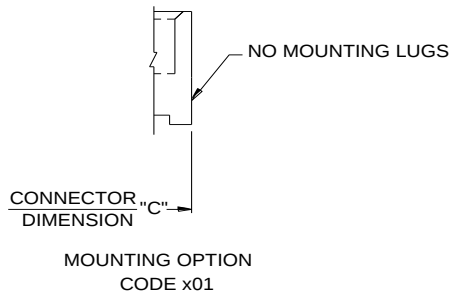

CODE X02 AND X04- THROUGH MTG. HOLES		
	CODE X02	CODE X04
"A" DIA.	0.128(3.25)	0.156(3.96)
CODE X07 AND X08- THREADED INSERTS		
	CODE X07	CODE X08
INSERT	M3-0.5(METRIC)	#4-40 UNC

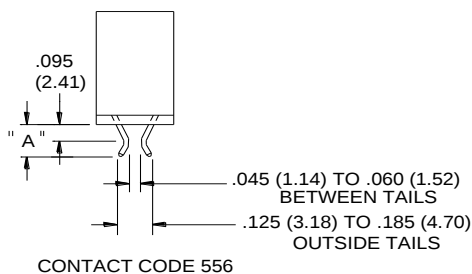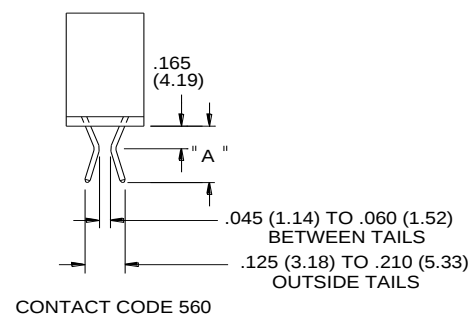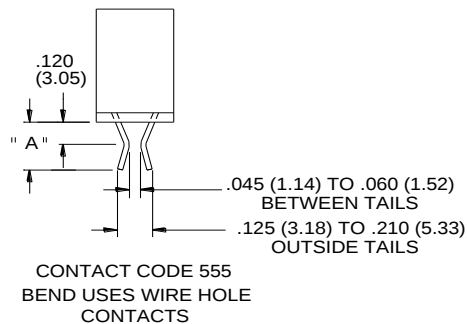

MTG. OPTION	A
555	0.205(5.21)
556	0.235(5.97)
560	0.365(9.27)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

[341-005-500-101](#) [341-006-500-102](#) [341-006-520-108](#) [341-006-521-102](#) [341-008-520-102](#) [341-010-500-102](#) [391-046-521-201](#) [391-064-520-201](#) [391-064-521-201](#) [341-092-520-202](#) [391-006-520-101](#) [391-022-520-101](#) [391-024-520-201](#) [391-030-524-201](#) [391-034-521-208](#) [341-060-520-208](#) [341-070-521-208](#) [341-070-522-208](#) [341-080-520-201](#) [341-080-520-202](#) [341-080-521-202](#) [341-050-520-208](#) [341-050-521-208](#) [341-050-524-201](#) [341-052-520-201](#) [341-056-520-208](#) [341-058-520-201](#) [341-036-520-208](#) [341-036-524-201](#) [341-038-500-201](#) [341-044-520-203](#) [341-044-520-208](#) [341-048-521-201](#) [341-030-522-203](#) [341-030-524-201](#) [341-032-556-201](#) [341-034-520-201](#) [341-034-521-201](#) [341-034-524-201](#) [341-020-522-101](#) [341-020-560-201](#) [341-022-520-101](#) [341-026-560-201](#) [341-028-500-201](#) [341-030-500-203](#) [341-016-500-204](#) [341-018-520-101](#) [341-018-520-204](#) [341-020-500-203](#) [341-020-500-208](#) [341-020-521-208](#) [341-010-520-101](#) [341-010-520-208](#) [341-010-522-201](#) [341-010-524-208](#) [341-012-520-101](#) [341-013-500-108](#) [341-005-500-102](#) [341-005-500-103](#) [341-005-500-104](#) [341-005-500-107](#) [341-005-500-108](#) [341-005-520-101](#) [391-092-522-201](#) [391-092-522-202](#) [391-092-522-204](#) [391-092-524-201](#) [391-092-524-202](#) [391-092-524-204](#) [391-092-520-201](#) [391-092-520-202](#) [391-092-520-204](#) [391-092-521-201](#) [391-092-521-202](#) [391-092-521-204](#) [391-090-522-201](#) [391-090-522-202](#) [391-090-522-204](#) [391-090-524-201](#) [391-090-524-202](#) [391-090-524-204](#) [391-090-520-201](#) [391-090-520-202](#) [391-090-520-204](#) [391-090-521-201](#) [391-090-521-202](#) [391-090-521-204](#) [391-088-522-201](#) [391-088-522-202](#) [391-088-522-204](#) [391-088-524-201](#) [391-088-524-202](#) [391-088-524-204](#) [391-088-520-201](#) [391-088-520-202](#) [391-088-520-204](#) [391-088-521-201](#) [391-088-521-202](#) [391-088-521-204](#) [391-084-524-201](#)