



379 SERIES



Card Edge Connector 0.150" (3.81mm) Pitch



• FEATURES:

- .150" (3.81mm) Contact Spacing x .200" (5.08mm) Row Spacing
- Accepts .062" (1.57mm) Nominal Thickness P.C. Board
- High Profile Insulator Body, .600" (15.24mm)
- Contact Termination Options include P.C. Tail, Wire Wrap and Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options
- Accepts In-Contact Polarizing Keys
- RoHS Compliant

Specifications:

Insulator Material	UL 94V-0 Thermoplastic Polyester, Black Color
Contact Material	Copper Alloy
Contact Plating	Gold Plating on mating area and Tin Plating on tails with Nickel underplating all over
Current Rating	3 Ampere
Contact Resistance	10 milliohms maximum
Dielectric Withstand Voltage	1800 VAC rms at sea level between adjacent contacts
Insulation Resistance	5000 Megaohms minimum
Operating Temperature	-40°C to +105°C
Insertion Force	16oz (4.45N) maximum per contact pair when tested with .070" (1.78mm) thick gauge
Withdrawal Force	1oz (0.28N) minimum per contact pair when tested with .054" (1.37mm) thick gauge

Example Part Number:

379-040-520-208

Series: 379

Series _____
Total Number of Contacts _____
Contact Code _____
Contact Rows _____
Mounting Options _____

Total Number of Contacts:

006, 016, 020, 026 or 32
012, 032, 040, 052 or 064

Contact Rows

Single Row
Dual Row

Mounting Options:

	Description
01	No Mounting Lug
02	Ø.128" (Ø3.25mm) Mounting Holes
03	Ø.116" (Ø2.95mm) I.D. Floating Eyelets
04	Ø.156" (Ø3.96mm) Mounting Holes
07	M3-0.5 Metric Threaded Inserts
08	#4-40 Unified Threaded Inserts

Contact Code

Description & Tail Size

Tail Length "G"

520	P.C. Tail	.030 x .018 (0.76 x 0.46)	.175 (4.45)
521	P.C. Tail	.025 Square (0.64 Square)	.150 (3.81)
523	P.C. Tail	.025 Square (0.64 Square)	.390 (9.91)
524	P.C. Tail	.018 Square (0.46 Square)	.175 (4.45)
540	Wire Wrap	.025 Square (0.64 Square)	.560 (14.22)
541	Wire Wrap	.025 Square (0.64 Square)	.750 (19.05)
542	Wire Wrap	.025 Square (0.64 Square)	.645 (16.38)
544	Wire Wrap	.050 x .025 (1.27 x 0.64)	.750 (19.05)
555	EXTENDER BOARD BEND (CODE 500 CONTACTS)		
556	EXTENDER BOARD BEND (CODE 520 CONTACTS)		
560	EXTENDER BOARD BEND (CODE 523 CONTACTS)		



Ordering Code Notes:

Consult with EDAC regarding 90 degree bend availability.




379 SERIES


Card Edge Connector 0.150" (3.81mm) Pitch

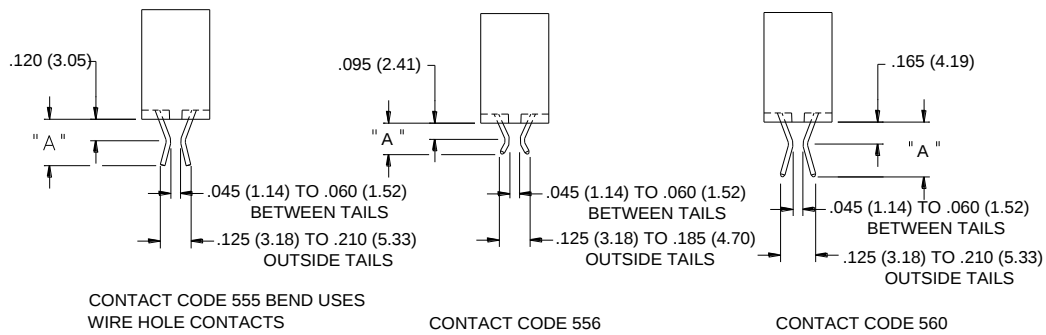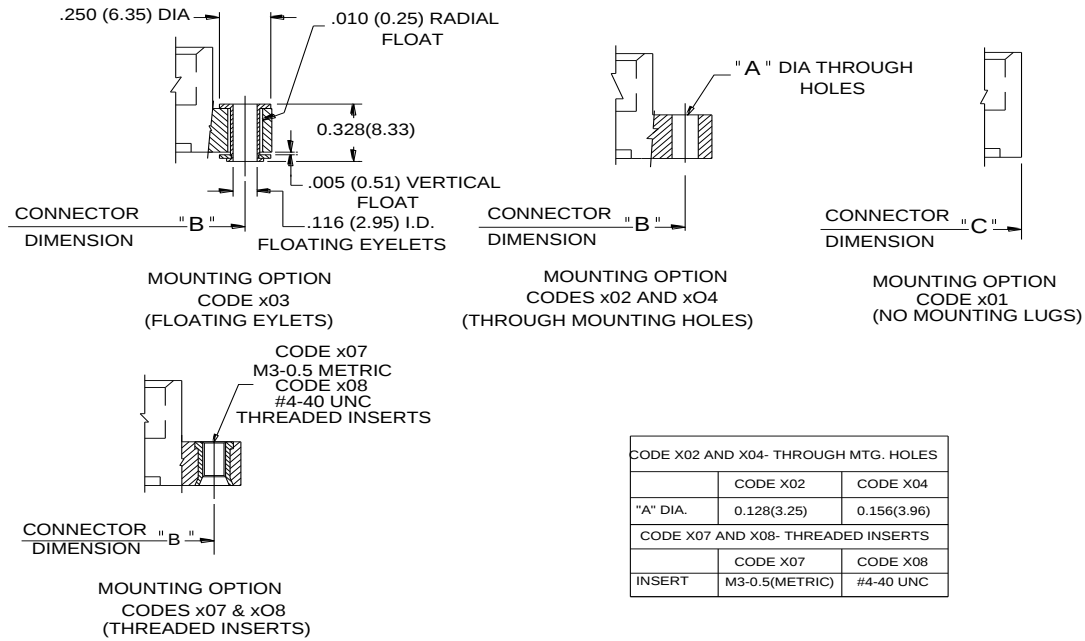

IN-CONTACT
POLARIZING KEY
P/N 345-240-328



CONTACT CODE	A	B
555	0.245(6.22)	
556	0.170(4.32)	
560	0.375(9.53)	

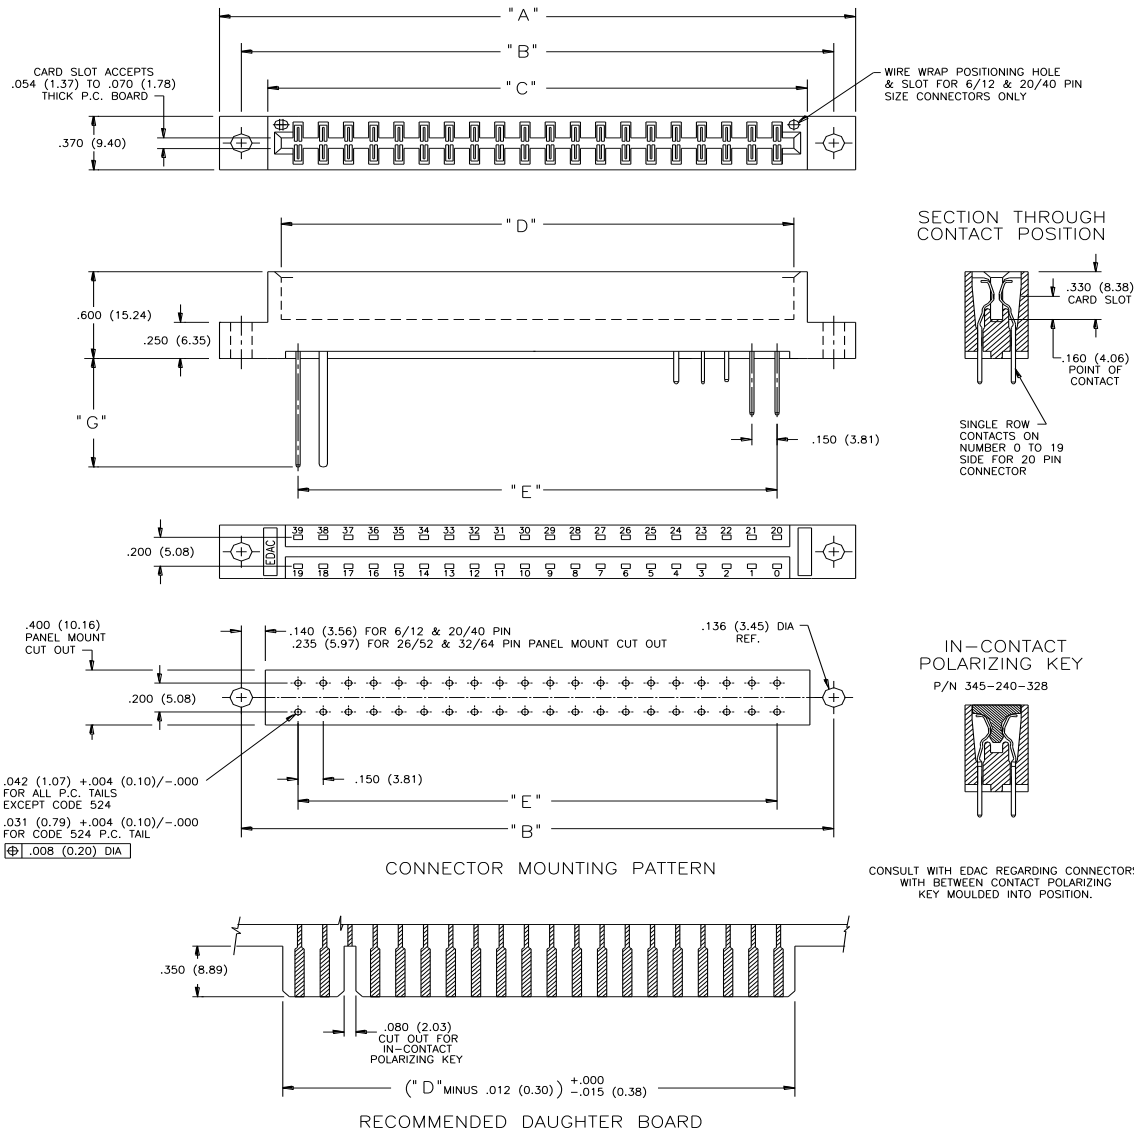

CONSULT WITH EDAC REGARDING CONNECTORS WITH BETWEEN-CONTACT POLARIZING KEY MOULDED INTO POSITION.

- SERIES AND MATERIAL CODE SEE NOTE 6
- INSULATOR IDENTITY CODE (213 PPS, BLACK COLOR)
- NUMBER OF CONTACT POSITIONS PER ROW
- OFFSET VARIATION CODE SEE NOTE 3 ON DWG. 345-210-001
- MOUNTING VARIATION CODE SEE NOTE 3 ON DWG. 345-210-001

379-210-032-XXX	32	64	5.675(144.14)	5.410(137.41)	5.100(129.54)	4.940(125.47)	4.650(118.11)
379-210-026-XXX	26	52	4.775(120.78)	4.510(114.55)	4.200(106.68)	4.040(102.62)	3.750(95.25)
379-210-024-XXX	24	48	4.475(113.66)	4.210(106.93)	3.900(99.06)	3.740(95.00)	3.450(87.63)
379-210-020-XXX	20	40	3.875(98.43)	3.610(91.69)	3.300(83.82)	3.140(79.76)	2.850(72.39)
379-210-016-XXX	16	32	3.275(83.18)	3.010(76.45)	2.700(68.58)	2.540(64.52)	2.250(57.15)
379-210-006-XXX	6	12	1.775(45.09)	1.510(38.35)	1.200(30.48)	1.040(26.42)	.750(19.05)
PART NUMBER	SINGLE (N° OF CONTACTS)	DUAL (N° OF CONTACTS)	A ±.015	B ±.010	C ±.015	D $\pm^{+.010}_{-.006}$	E ±.005

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

[379-040-521-202](#) [379-052-521-202](#) [379-052-540-204](#) [379-064-520-202](#) [379-064-521-202](#) [379-052-541-201](#) [379-052-520-201](#) [379-040-520-201](#) [379-040-520-202](#) [379-040-542-202](#) [379-012-520-201](#) [379-012-520-202](#) [379-012-520-203](#) [379-052-556-202](#) [379-052-556-204](#) [379-052-560-201](#) [379-052-560-202](#) [379-052-560-204](#) [379-052-544-207](#) [379-052-544-208](#) [379-052-555-201](#) [379-052-555-202](#) [379-052-555-204](#) [379-052-556-201](#) [379-052-542-207](#) [379-052-542-208](#) [379-052-544-201](#) [379-052-544-202](#) [379-052-544-203](#) [379-052-544-204](#) [379-052-541-207](#) [379-052-541-208](#) [379-052-542-201](#) [379-052-542-202](#) [379-052-542-203](#) [379-052-542-204](#) [379-052-524-204](#) [379-052-524-207](#) [379-052-524-208](#) [379-052-541-202](#) [379-052-541-203](#) [379-052-541-204](#) [379-052-523-204](#) [379-052-523-207](#) [379-052-523-208](#) [379-052-524-201](#) [379-052-524-202](#) [379-052-524-203](#) [379-052-521-204](#) [379-052-521-207](#) [379-052-521-208](#) [379-052-523-201](#) [379-052-523-202](#) [379-052-523-203](#) [379-052-520-203](#) [379-052-520-204](#) [379-052-520-207](#) [379-052-520-208](#) [379-052-521-201](#) [379-052-521-203](#) [379-040-556-202](#) [379-040-556-204](#) [379-040-560-201](#) [379-040-560-202](#) [379-040-560-204](#) [379-052-520-202](#) [379-040-544-207](#) [379-040-544-208](#) [379-040-555-201](#) [379-040-555-202](#) [379-040-555-204](#) [379-040-556-201](#) [379-040-542-207](#) [379-040-542-208](#) [379-040-544-201](#) [379-040-544-202](#) [379-040-544-203](#) [379-040-544-204](#) [379-040-541-204](#) [379-040-541-207](#) [379-040-541-208](#) [379-040-542-201](#) [379-040-542-203](#) [379-040-542-204](#) [379-040-524-204](#) [379-040-524-207](#) [379-040-524-208](#) [379-040-541-201](#) [379-040-541-202](#) [379-040-541-203](#) [379-040-523-204](#) [379-040-523-207](#) [379-040-523-208](#) [379-040-524-201](#) [379-040-524-202](#) [379-040-524-203](#) [379-040-521-204](#) [379-040-521-207](#) [379-040-521-208](#) [379-040-523-201](#)