

# CRSL Series Lighted Single-pole Rocker Switches

**Approvals**

UL recognized, CSA certified. Load rating: 20A 125/250 VAC. 1 HP, 125/250 VAC. 14A 14VDC, VDE approval 15A. Contacts: fine silver for long life dependability. Dielectric strength: 1250 volts (live parts to ground). Life: 35,000 operations at maximum rating. Insulation resistance: 5 megohms.

**Low Level Control**

For low level/dry circuit applications (<100 am) contact factory for part number (Gold plated contacts).

**High Inrush**

125 Amp inrush capability (AgNi contacts).

**Terminals**

Style A - 1/4-inch quick-connect

**Mechanical Features**

100,000 mechanical operations

**Lamps**

6, 12 and 28 volt incandescent lamps standard.  
125 and 250 volt neon lamps standard.

**Special Lamps**

Green neon 125 and 250 volt lamps for green actuator.

**LED Display**








LED display options available. Consult factory.

**Markings**







Letters, numbers and symbols can be applied to rocker actuator or to integral nylon bezel; see inside back cover for details.

**Mounting**

Snap-in type panel mounting for ease of installation without additional mounting hardware.

Circuit	Switching		
1	SPST Maintained Refer to Note 1	 2 1 3 OFF	 2 1 3 ON
4	SPST (Momentary) Normally Open Refer to Note 1	 2 1 3 OFF	 2 1 3 (ON)
0	G	 2 o o 4	

**NOTE 1.** Furnished with one side of the lamp internally connected and a single lamp-terminal at the back of the switch.

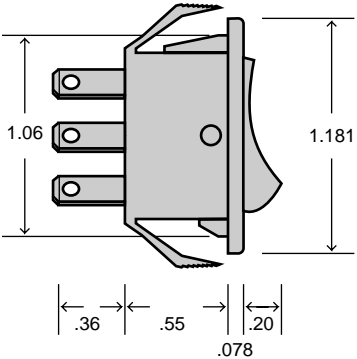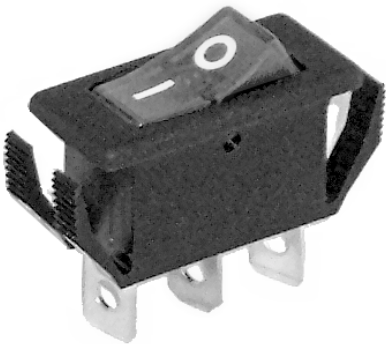

Panel Cut Out  
Panel Thickness 1/32" - 3/16"

**Ordering Information:**

**CRS**

**L**

**Lighting Option**  
L=Lighted Switch

**Circuit**

1=SPST Maintained (Refer to Note 1)  
4=SPST (Momentary) Normally Open (Refer to Note 1)  
O=Indicator Only (see pp. 36-37)

**Terminal Option**

A=Fine Silver (Normal Duty)  
G=Gold Plated Contacts  
H=High Inrush Contacts

**Lamp Voltage**

6V=6 Volt Incandescent  
12V=12 Volt Incandescent  
125V=125 Volt Neon  
250V=250 Volt Neon  
125VG=125 Volt Green Neon  
250VG=250 Volt Green Neon  
6VR=6 Volt Red LED  
6VG=6 Volt Green LED  
12VR=12 Volt Red LED  
12VG=12 Volt Green LED

**Actuator Color**

1=Red  
2=Clear  
3=Amber  
4=Green\*

**Housing Color**

M9=Matte Black  
(For other colors contact factory)

**Accessories (Optional)**

T=Boot

\*Green lenses require non-standard neon lamps for units with neon lamps.



Phone (203) 272-2794 • Fax (203) 272-3492 • <http://www.osloswitch.com>

MADE IN U.S.A.



Phone (203) 272-2794 • Fax (203) 272-3492 • <http://www.osloswitch.com>

MADE IN U.S.A.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Electroswitch:](#)

[CRSL1A250V2M9](#) [CRSL1A250V3M9](#) [CRSL1A250VG4M9](#) [CRSL4A125V1M9](#) [CRSL1A125V3M9](#) [CRSL1A28V3M9](#)  
[CRSL4A28V2M9](#) [CRSL1A125VG4M9](#) [CRSL1A28V2M9](#) [CRSL1A12V3M9](#) [CRSL1A125V1M9](#) [CRSL1A28V1M9](#)  
[CRSL1H250VG4M9](#) [CRSL1A250V1M9](#) [CRSL1A28V4M9](#) [CRSL1H125V1M9](#) [CRSL4A125V3M9](#)