

TCXO/VC-TCXO HIGH STABILITY

TG-5035CJ/CG/CE

- Frequency range : 26 MHz to 52 MHz (TG-5035CJ/CG)
16 MHz to 40MHz (TG-5035CE)
- Supply voltage : 1.8 V Typ./ 2.8 V Typ./ 3.0 V Typ./ 3.3 V Typ.
- Frequency / temperature characteristics : $\pm 0.5 \times 10^{-6}$ Max or $\pm 2.0 \times 10^{-6}$ Max.
- Applications : GPS, RF,
Wireless communication devices
(CDMA, WCDMA, LTE, WiMAX, other)
- Features : High stability, Stand-by function (ST)



Product Number (Please contact us)


TG-5035CJ : X1G003841xxxx00

TG-5035CG : X1G003851xxxx00


TG-5035CE : X1G003831xxxx00



TG-5035CJ
(2.0 × 1.6 × 0.73 mm)



TG-5035CG
(2.5 × 2.0 × 0.8 mm)



TG-5035CE
(3.2 × 2.5 × 0.9 mm)

Actual size

TG-5035CJ

TG-5035CG

TG-5035CE

Specifications (characteristics)

Item	Symbol	VC-TCXO	TCXO	TCXO-Standby	Conditions / Remarks
Output frequency range	f _o	26 MHz, and 38.4 MHz			Standard frequency
		25.000 MHz to 52.000 MHz			TG-5035CJ/TG5035CG
		16.000 MHz to 40.000 MHz			TG-5035CE
Supply voltage	V _{cc}	1.8 V ±0.1 V / 2.8 V ±5% / 3.0 V ±5% / 3.3 V ±5%			Supply voltage range : 1.7 V to 3.6 V
Storage temperature	T _{stg}	-40 °C to +90 °C			Storage as single product.
Operating temperature	T _{use}	-40 °C to +85 °C / -30 °C to +85 °C			
Frequency tolerance	f _{tol}	±2.0 ×10 ⁻⁶ Max.			After reflow, +25 °C
Frequency/temperature characteristics	f _o -T _c	±0.5 × 10 ⁻⁶ Max. / -30 °C to +85 °C			High stability version (for GPS)
		±2.0 × 10 ⁻⁶ Max. / -30 °C to +85 °C			Standard stability version
		±0.5 × 10 ⁻⁶ Max. / -40 °C to +85 °C			Customized product.(Option)
Frequency/load coefficient	f _o -Load	±0.2 × 10 ⁻⁶ Max.			10 kΩ // 10 pF ±10 %
Frequency/voltage coefficient	f _o -V _{cc}	±0.2 × 10 ⁻⁶ Max.			V _{cc} ±5%
Frequency aging	f _{age}	±1.0 ×10 ⁻⁶ Max.			+25 °C , First year, f _o ≤40 MHz
		±1.5 ×10 ⁻⁶ Max.			+25 °C , First year,40 MHz<f _o ≤52 MHz
Current consumption	I _{cc}	1.5 mA Max.			f _o ≤26 MHz
		2.0 mA Max.			26 MHz<f _o ≤52 MHz
Stand-by current	I _{std}	—		10 μA Max.	ST = GND
Input voltage	V _{IH}	—		80% V _{cc} Min.	ST terminal
	V _{IL}	—		20 % V _{cc} Max.	
Input resistance	R _{in}	500 kΩ Min.	—		Vc- GND (DC)
Frequency control range	f _{cont}	±8.0 × 10 ⁻⁶ to ±15.0 × 10 ⁻⁶	—		Vc =0.9 V ±0.6 V (V _{cc} =1.8 V) or Vc =1.4 V ±1.0 V (V _{cc} =2.8 V) or Vc =1.5 V ±1.0 V (V _{cc} =3.0 V) or Vc =1.65 V ±1.0 V (V _{cc} =3.3 V)
Frequency change polarity	—	Positive polarity	—		
Symmetry	SYM	40 % to 60 %			GND level (DC cut)
Output voltage	V _{PP}	0.8 V Min.			Peak to Peak
Start-up time	t _{str}	2.0 ms Max.			T=0 at 90% V _{cc}
Output load condition	Load_R	10 kΩ			DC cut capacitor = 0.01 μF
	Load_C	10 pF			

* Note : Please contact us for requirements not listed in this specification.

Product Name TG-5035 C-J-*** 26.000000MHz


(Standard form)

① ② ③ ④

①Model ②Package type ③Spec segment (Please contact us) ④Frequency


External dimensions

(Unit: mm)

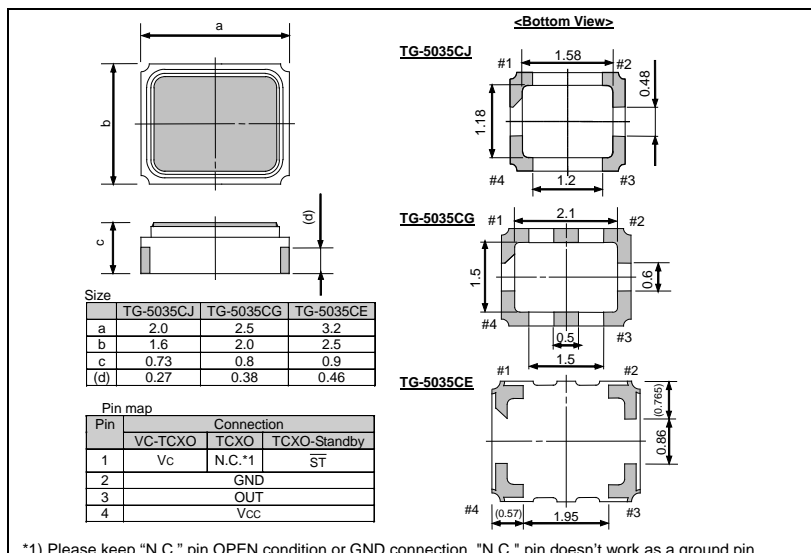

Footprint (Recommended)

(Unit: mm)

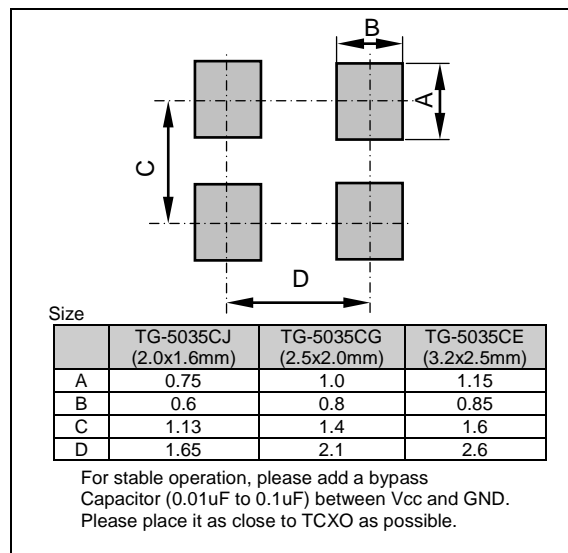

PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.





WORKING FOR HIGH QUALITY

In order provide high quality and reliable products and services than meet customer needs,

Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired ISO/TS 16949 certification that is requested strongly by major automotive manufacturers as standard.

ISO/TS16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

► Explanation of the mark that are using it for the catalog

	► Pb free.
	► Complies with EU RoHS directive. *About the products without the Pb-free mark. Contains Pb in products exempted by EU RoHS directive. (Contains Pb in sealing glass, high melting temperature type solder or other.)
	► Designed for automotive applications such as Car Multimedia, Body Electronics, Remote Keyless Entry etc.
	► Designed for automotive applications related to driving safety (Engine Control Unit, Air Bag, ESC etc).

Notice

- This material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
- The information about applied data, circuitry, software, usage, etc. written in this material is intended for reference only. Seiko Epson does not assume any liability for the occurrence of customer damage or infringing on any patent or copyright of a third party. This material does not authorize the licensing for any patent or intellectual copyrights.
- When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- You are requested not to use the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes. You are also requested that you would not make the products available to any third party who may use the products for such prohibited purposes.
- These products are intended for general use in electronic equipment. When using them in specific applications that require extremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson in advance.
 - / Space equipment (artificial satellites, rockets, etc.) / Transportation vehicles and related (automobiles, aircraft, trains, vessels, etc.) / Medical instruments to sustain life / Submarine transmitters / Power stations and related / Fire work equipment and security equipment / traffic control equipment / and others requiring equivalent reliability.
- All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Epson:

[TG-5035CJ-14N 33.6000M3](#) [TG-5035CJ-33N 38.4000M3](#) [TG-5035CJ-34N 52.0000M3](#) [TG-5035CG-69N 25.0000M6](#)
[TG-5035CG-69N 25.0000MB](#) [TG-5035CG-74N 38.4000MB](#) [TG-5035CJ-18S 26.0000MX](#) [TG-5035CJ-40N](#)
[26.0000MX](#) [TG-5035CJ-43N 38.4000MX](#) [TG-5035CJ-66M 26.0000M0](#) [TG-5035CJ-66M 26.0000M3](#) [TG-5035CJ-66M](#)
[26.0000M5](#) [TG-5035CJ-13N 19.2000M3](#) [TG-5035CJ-43N 38.4000M0](#) [TG-5035CG-13N 19.2000M3](#)
[TG5035CE08N16.3840M](#) [TG-5035CJ-43N 38.4000M3](#) [TG-5035CJ-43N 38.4000M6](#) [TG-5035CJ-18S 26.0000M0](#) [TG-](#)
[5035CG-17N26.0000M3](#) [TG-5035CJ-75S26.0000MB](#) [TG-5035CJ-12N26.0000MB](#) [TG-5035CJ-26N26.0000MB](#) [TG-](#)
[5035CJ-12N26.0000M0](#) [TG-5035CJ-12N26.0000M3](#) [TG-5035CJ-33N38.4000MB](#) [TG-5035CG-17N26.0000M0](#) [TG-](#)
[5035CG-17N 26.0000M0](#) [TG-5035CG-17N 26.0000M3](#) [TG-5035CJ-12N 26.0000M0](#) [TG-5035CJ-12N 26.0000M3](#) [TG-](#)
[5035CJ-12N 26.0000MB](#) [TG-5035CJ-26N 26.0000MB](#) [TG-5035CJ-75S 26.0000MB](#) [TG-5035CJ-33N 38.4000MB](#)