



CRYSTAL OSCILLATOR

PROGRAMMABLE

OUTPUT : CMOS

SG - 8002 series

- Frequency range : 1 MHz to 125 MHz
- Supply voltage : 3.0 V / 3.3 V / 5.0 V
- Function : Output enable(OE) or Standby($\overline{ST}$)


- Short mass production lead time by PLL technology.
- SG-Writer available to purchase, please contact Epson or local sales representative.



CE, CA



Product Number (please contact us)

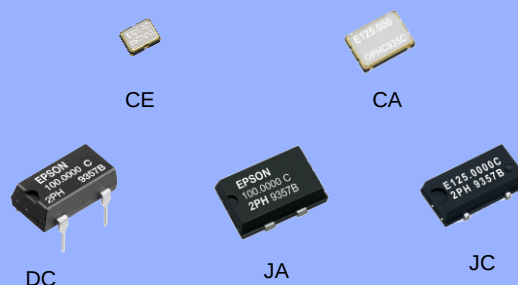

Specifications (characteristics)

Item	Symbol	Specifications *2			Conditions / Remarks
		PT / ST	PH / SH	PC / SC	
Output frequency range	fo	1 MHz to 125 MHz		—	Vcc = 4.5 V to 5.5 V
		—	—	1 MHz to 125 MHz	Vcc = 3.0 V to 3.6 V
		—	—	1 MHz to 66.7 MHz	Vcc = 2.7 V to 3.6 V
Supply voltage	Vcc	4.5 V to 5.5 V 2.7 V to 3.6 V			
Storage temperature	T_stg	-55 °C to +125 °C (SG-8002CA / JA / DC)			Storage as single product.
		-55 °C to +100 °C (SG-8002JC)			
		-40 °C to +125 °C (SG-8002CE)			
Operating temperature*1	T_use	-20 °C to +70 °C / -40 °C to +85 °C			
Frequency tolerance	f_tol	B: $\pm 50 \times 10^{-6}$, C: $\pm 100 \times 10^{-6}$			-20 °C to +70 °C
		M: $\pm 100 \times 10^{-6}$		M: $\pm 100 \times 10^{-6}$	-40 °C to +85 °C (except SG-8002JC) *3
Current consumption	Icc	40 mA Max. (SG-8002CE)		28 mA Max.	No load condition, Max. frequency
		45 mA Max. (SG-8002CA / JC / JA / DC)			
Output disable current	I_dis	30 mA Max.		16 mA Max.	OE=GND (PT,PH,PC)
Stand-by current	I_std	50 μ A Max.			$\overline{ST}$ =GND (ST,SH,SC)
Symmetry *1	SYM	40 % to 60 %	—		TTL load: 1.4 V, Max. load condition
		45 % to 55 %			
		—	40 % to 60 %		CMOS load:50 % Vcc level, Max. load condition
		—	45 % to 55 %		
Output voltage	VOH	VCC -0.4 V Min.			IOH=-16 mA (PT,ST,PH,SH) , -8 mA (PC,SC)
	VOL	0.4 V Max.			IOL=16 mA (PT,ST,PH,SH) , 8 mA (PC,SC)
Output load condition (TTL) *1	L_TTL	5 TTL Max.	—		Max. frequency and Max. Supply voltage (SG-8002CE / CA / JA / DC)
		5 TTL Max.	—		fo $\leq$ 90 MHz and Max. Supply voltage (SG-8002JC)
Output load condition (CMOS) *1	L_CMOS	15 pF Max.			Max. frequency and Max. Supply voltage (SG-8002CE / JC)
		15 pF Max.	25 pF Max	15 pF Max.	Max. frequency and Max. Supply voltage (SG-8002CA / JA / DC)
Input voltage	VIH	2.0 V Min.		70 % Vcc Min.	OE terminal or $\overline{ST}$ terminal
	VIL	0.8 V Max.		20 % Vcc Max.	
Rise / Fall time *1	tr/ tf	4 ns Max.	—		TTL load: 0.4 V to 2.4 V level
		—	3 ns Max.		CMOS load: 20 % Vcc to 80 % Vcc level
Start-up time	t_str	10 ms Max.			Time at minimum supply voltage to be 0 s
Frequency aging	f_aging	$\pm 5 \times 10^{-6}$ / year Max.			+25 °C, Vcc=5.0 V/ 3.3 V (PC,SC) First year

*1 Please refer to "Outline specifications" page for information regarding; operating temperature, available frequencies, symmetry, output load conditions and rise/fall time.

*2 Please refer to "Jitter specifications and characteristics chart" page for PLL-PLL connection & Jitter specification.

*3 Please refer to "Outline specifications" for availability of tolerance "M". A "Frequency checking" program on the Seiko Epson website is also available.

External dimensions and Recommended footprint

(Unit:mm)

SG-8002CE
Ceramic SON 4pin 3.2x2.5x1.05 mm

SG-8002CA
Ceramic SON 4pin 7.0x5.0x1.4 mm

SG-8002JC
SOJ 4pin 10.5x5.8x2.7 mm

Package and pin compatible with SG-636.



The metal case inside of the molding compound may be exposed on the top or bottom of this product.
This purely cosmetic and does not have any effect on quality, reliability or electrical specs.


Note.

OE Pin (PT, PH, PC)

OE Pin = "H" or "open": Specified frequency output.

OE Pin = "L": Output is high impedance.

ST Pin (ST, SH, SC)

ST Pin = "H" or "open": Specified frequency output.

ST Pin = "L": Output is low level (weak pull - down), oscillation stops.

Pin map

Pin	Connection
1	OE or $\overline{ST}$
2	GND
3	OUT
4	Vcc

To maintain stable operation, provide a 0.01μF to 0.1μF by-pass capacitor at a location as near as possible to the power source terminal of the crystal product (between Vcc - GND).





External dimensions and Recommended footprint (Continued)

(Unit:mm)

SG-8002JA


SOJ 4pin 14.0x9.8x4.7 mm

Package and pin compatible with SG-615.

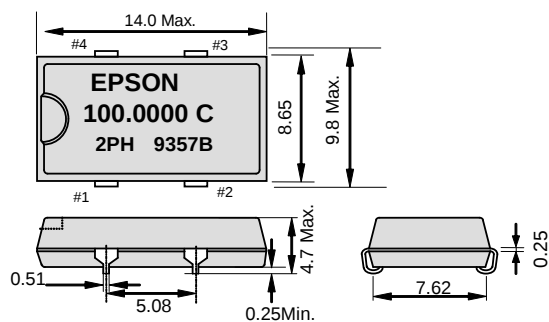

SG-8002DC

DIP half size

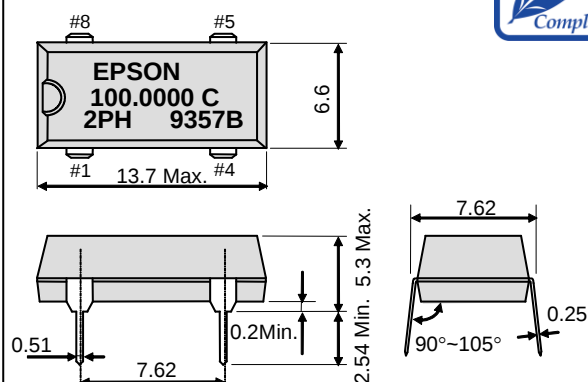

Note.

OE Pin (PT, PH, PC)

OE Pin = "H" or "open": Specified frequency output.

OE Pin = "L": Output is high impedance.

 $\overline{ST}$ Pin (ST, SH, SC) $\overline{ST}$ Pin = "H" or "open": Specified frequency output.

ST Pin = "L": Output is low level (weak pull - down), oscillation stops.

Pin map

Pin	Connection
1	OE or $\overline{ST}$
2	GND
3	OUT
4	V _{CC}

Pin map: SG-8002DC

Pin	Connection
1	OE or $\overline{ST}$
4	GND
5	OUT
8	V _{CC}

To maintain stable operation, provide a 0.01uF to 0.1uF by-pass capacitor at a location as near as possible to the power source terminal of the crystal product (between V_{CC} - GND).

Products number

(Please contact us for each product.)

SG-8002CE: Q3321CExxxxx00
 SG-8002CA: Q3309CAxxxxx00
 SG-8002JA: Q3306JAXxxxx00

SG-8002JC: Q3307JCx2xxxx00
 SG-8002DC: Q3204DCx2xxxx00

SG-8002 Series Outline of specifications

Model		Supply voltage	Operating temperature	Output load condition	Symmetry	Output rise time / Output fall time
SG-8002CE	PT/ST	4.5 V to 5.5 V	-20 °C to +70 °C	5TTL+15pF	40 % to 60 % (1.4 V, L_TTL=5 TTL+15 pF, f ₀ ≤125 MHz) 45 % to 55 % (1.4 V, L_TTL=5 TTL+15 pF, f ₀ ≤66.7 MHz) 45 % to 55 % (1.4 V, L_TTL=5 TTL+15 pF, f ₀ ≤27.0 MHz)	2.0 ns Max. (0.8 V to 2.0 V, L_TTL=Max.) 4.0 ns Max. (0.4 V to 2.4 V, L_TTL=Max.)
			-40 °C to +85 °C	15 pF (f ₀ ≤125 MHz) 25 pF (f ₀ ≤100 MHz) 25 pF (f ₀ ≤27 MHz)	40 % to 60 % (50 % VCC, L_CMOS=15 pF, f ₀ ≤125 MHz) 45 % to 55 % (50 % VCC, L_CMOS=25 pF, f ₀ ≤66.7 MHz) 45 % to 55 % (50 % VCC, L_CMOS=25 pF, f ₀ ≤27.0 MHz)	3.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS=Max.)
	PH/SH	3.0 V to 3.6 V to 3.6 V	-20 °C to +70 °C	15 pF	40 % to 60 % (50 % VCC, L_CMOS=15 pF, f ₀ ≤125 MHz) 45 % to 55 % (50 % VCC, L_CMOS=15 pF, f ₀ ≤40 MHz)	3.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS=Max.)
			-40 °C to +85 °C	15 pF	40 % to 60 % (50 % VCC, L_CMOS=15 pF, f ₀ ≤66.7 MHz)	3.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS=Max.)
	PC/SC	3.0 V to 3.6 V to 3.6 V	-20 °C to +70 °C	15 pF	40 % to 60 % (1.4 V, L_TTL=5 TTL+15 pF, f ₀ ≤125 MHz) 45 % to 55 % (1.4 V, L_TTL=5 TTL+15 pF, f ₀ ≤66.7 MHz)	2.0 ns Max. (0.8 V to 2.0 V, L_CMOS or L_TTL=Max.) 4.0 ns Max. (0.4 V to 2.4 V, L_CMOS or L_TTL=Max.)
			-40 °C to +85 °C	5 TTL+15 pF (f ₀ ≤40 MHz) 15 pF (f ₀ ≤55 MHz)	40 % to 60 % (1.4 V, L_CMOS=15 pF, f ₀ ≤55.0 MHz) 45 % to 55 % (1.4 V, L_TTL=5 TTL+15 pF, f ₀ ≤40.0 MHz)	2.0 ns Max. (0.8 V to 2.0 V, L_CMOS or L_TTL=Max.) 4.0 ns Max. (0.4 V to 2.4 V, L_CMOS or L_TTL=Max.)
SG-8002CA SG-8002JA SG-8002DC	PT/ST	4.5 V to 5.5 V	-20 °C to +70 °C	5TTL+15 pF (f ₀ ≤125 MHz) 25 pF (f ₀ ≤66.7 MHz)	40 % to 60 % (1.4 V, L_CMOS=15 pF, f ₀ ≤125 MHz) 45 % to 55 % (1.4 V, L_CMOS=25 pF, f ₀ ≤66.7 MHz) 45 % to 55 % (1.4 V, L_TTL=5 TTL+15 pF, f ₀ ≤66.7 MHz)	2.0 ns Max. (0.8 V to 2.0 V, L_CMOS or L_TTL=Max.) 4.0 ns Max. (0.4 V to 2.4 V, L_CMOS or L_TTL=Max.)
			-40 °C to +85 °C	5 TTL+15 pF (f ₀ ≤40 MHz) 15 pF (f ₀ ≤55 MHz)	40 % to 60 % (1.4 V, L_CMOS=15 pF, f ₀ ≤55.0 MHz) 45 % to 55 % (1.4 V, L_TTL=5 TTL+15 pF, f ₀ ≤40.0 MHz)	2.0 ns Max. (0.8 V to 2.0 V, L_CMOS or L_TTL=Max.) 4.0 ns Max. (0.4 V to 2.4 V, L_CMOS or L_TTL=Max.)
	PH/SH	3.0 V to 3.6 V to 3.6 V	-20 °C to +70 °C	25 pF (f ₀ ≤125 MHz) 50 pF (f ₀ ≤66.7 MHz)	40 % to 60 % (50 % VCC, L_CMOS=25 pF, f ₀ ≤125 MHz) 45 % to 55 % (50 % VCC, L_CMOS=50 pF, f ₀ ≤66.7 MHz)	3.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS≤25pF) 4.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS=Max.)
			-40 °C to +85 °C	15 pF (f ₀ ≤55 MHz) 25 pF (f ₀ ≤40 MHz)	40 % to 60 % (50 % VCC, L_CMOS=15 pF, f ₀ ≤55.0 MHz) 45 % to 55 % (50 % VCC, L_CMOS=25 pF, f ₀ ≤40.0 MHz)	3.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS≤25pF) 4.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS=Max.)
	PC/SC	3.0 V to 3.6 V to 3.6 V	-20 °C to +70 °C	15 pF 30 pF (f ₀ ≤40 MHz)	40 % to 60 % (50 % VCC, L_CMOS=15 pF, f ₀ ≤125 MHz) 45 % to 55 % (50 % VCC, L_CMOS=30 pF, f ₀ ≤40 MHz)	3.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS≤15pF) 4.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS=Max.)
			-40 °C to +85 °C	15 pF	40 % to 60 % (50 % VCC, L_CMOS=15 pF, f ₀ ≤66.7 MHz)	3.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS≤15pF) 4.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS=Max.)
SG-8002JC	PT/ST	4.5 V to 5.5 V	-20 °C to +70 °C	5TTL+15 pF (f ₀ ≤90 MHz) 15 pF (f ₀ ≤125 MHz) 25 pF (f ₀ ≤66.7 MHz)	40 % to 60 % (1.4 V, L_CMOS=15 pF, f ₀ ≤125 MHz) 45 % to 55 % (1.4 V, L_TTL=5 TTL+15 pF, f ₀ ≤66.7 MHz) 45 % to 55 % (1.4 V, L_CMOS=25 pF, f ₀ ≤66.7 MHz)	2.0 ns Max. (0.8 V to 2.0 V, L_CMOS or L_TTL=Max.) 4.0 ns Max. (0.4 V to 2.4 V, L_CMOS or L_TTL=Max.)
			-40 °C to +85 °C	15 pF (f ₀ ≤125 MHz) 25 pF (f ₀ ≤90 MHz) 50 pF (f ₀ ≤66.7 MHz)	40 % to 60 % (50 % VCC, L_CMOS=15 pF, f ₀ ≤125 MHz) 45 % to 55 % (50 % VCC, L_CMOS=25 pF, f ₀ ≤90 MHz) 45 % to 55 % (50 % VCC, L_CMOS=50 pF, f ₀ ≤50 MHz)	3.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS≤25pF) 4.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS=Max.)
	PH/SH	3.0 V to 3.6 V to 3.6 V	-20 °C to +70 °C	15 pF 30 pF (f ₀ ≤40 MHz)	40 % to 60 % (50 % VCC, L_CMOS=15 pF, f ₀ ≤125 MHz) 45 % to 55 % (50 % VCC, L_CMOS=30 pF, f ₀ ≤40 MHz)	3.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS≤15pF) 4.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS=Max.)
			-40 °C to +85 °C	15 pF	40 % to 60 % (50 % VCC, L_CMOS=15 pF, f ₀ ≤66.7 MHz)	3.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS≤15pF) 4.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS=Max.)
	PC/SC	3.0 V to 3.6 V to 3.6 V	-20 °C to +70 °C	15 pF 30 pF (f ₀ ≤40 MHz)	40 % to 60 % (50 % VCC, L_CMOS=15 pF, f ₀ ≤125 MHz) 45 % to 55 % (50 % VCC, L_CMOS=30 pF, f ₀ ≤40 MHz)	3.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS≤15pF) 4.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS=Max.)
			-40 °C to +85 °C	15 pF	40 % to 60 % (50 % VCC, L_CMOS=15 pF, f ₀ ≤66.7 MHz)	3.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS≤15pF) 4.0 ns Max. (20 % VCC to 80 % VCC, L_CMOS=Max.)

Product Name
(Standard form)

SG-8002 CE 125.000000MHz S C C

① ② ③ ④ ⑤ ⑥

①Model ②Package type ③Frequency

④Function (P: Output enable, S: Standby)

⑤Supply voltage ⑥Frequency tolerance / Operating temperature

*As per table below.

⑤Supply voltage	
T,H	5.0 V Typ.
C	3.0 / 3.3 V Typ.

⑥Frequency tolerance / Operating temperature	
B	±50 × 10 ⁻⁶ / -20 to +70°C
C	±100 × 10 ⁻⁶ / -20 to +70°C
M	±100 × 10 ⁻⁶ / -40 to +85°C

► TABLE OF FREQUENCY RANGE*

Model(①, ②)	Function, Supply voltage(④, ⑤)	Supply voltage(⑤)	Frequency(③)	Frequency tolerance / Operating Temperature(⑥)
SG-8002CE	PT/ ST	4.5 V to 5.5 V	1.0 MHz to 125 MHz	B,C
	PH/ SH		1.0 MHz to 27 MHz	M
	PC/SC	3.0 V to 3.6 V	1.0 MHz to 125 MHz	B,C,M
SG-8002CA SG-8002JA SG-8002DC	PT/ ST	4.5 V to 5.5 V	1.0 MHz to 125 MHz	B,C
	PH/ SH		1.0 MHz to 55 MHz	M
	PC/ SC	3.0 V to 3.6 V	1.0 MHz to 125 MHz	B,C,M
SG-8002JC	PT/ ST	4.5 V to 5.5 V	1.0 MHz to 125 MHz	B,C
	PH/ SH		1.0 MHz to 55 MHz	M
	PC/ SC	3.0 V to 3.6 V	1.0 MHz to 125 MHz	B,C

SG-8002 series Jitter specifications and characteristics chart

■PLL-PLL connection

The SG-8002 series contains a PLL circuit and there are a few cases where the jitter value may be increased when this product is connected to another PLL oscillator (cascading connection). We do not recommend this series for analog video clock use and telecommunication synchronization. Please check in advance if the SG-8002 series jitter is acceptable to your application.
(Jitter specification of the SG-8002 series is max.250 ps/CL=15 pF)













Jitter Specifications

Model	Supply Voltage	Jitter Item	Specifications	Remarks
PT / PH ST / SH	5.0 V $\pm$ 0.5 V	Cycle to cycle	150 ps Max.	33 MHz $\leq f_0 \leq$ 125 MHz, L_CMOS=15 pF
			200 ps Max.	1.0 MHz $\leq f_0 <$ 33 MHz, L_CMOS=15 pF
		Peak to peak	200 ps Max.	33 MHz $\leq f_0 \leq$ 125 MHz, L_CMOS=15 pF
			250 ps Max.	1.0 MHz $\leq f_0 <$ 33 MHz, L_CMOS=15 pF
SC / PC	3.3 V $\pm$ 0.3 V	Cycle to cycle	200 ps Max.	1.0 MHz $\leq f_0 \leq$ 125 MHz, L_CMOS=15 pF
		Peak to peak	250 ps Max.	1.0 MHz $\leq f_0 \leq$ 125 MHz, L_CMOS=15 pF

■Remarks on noise management for power supply line

It is not recommended to insert filters or other devices in the power supply line as a counter measure for EMI noise reduction. This may cause high-frequency impedance of the power supply line and negatively affect stable oscillation. When using this measure please evaluate the circuitry and device behavior in the circuit to verify and effects on oscillation. Start up time (0 % Vcc to 90 % Vcc) of power source should be more than 150 μ s.

■SG-8002 series Characteristics chart

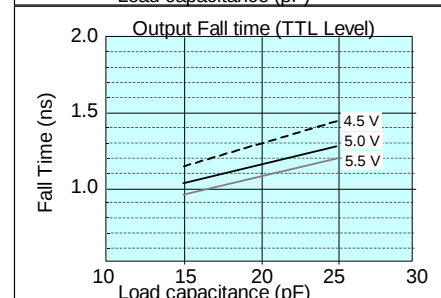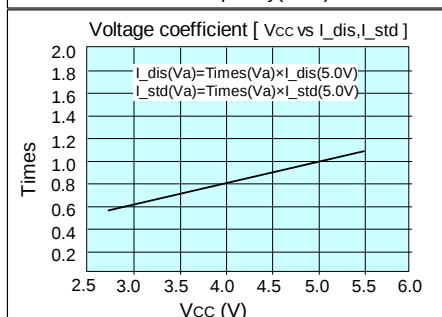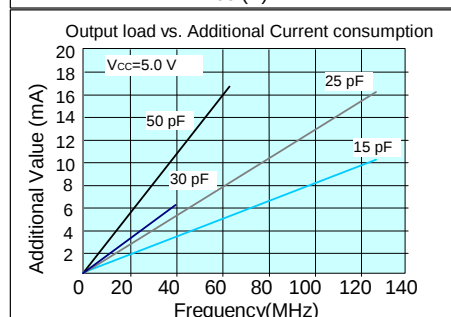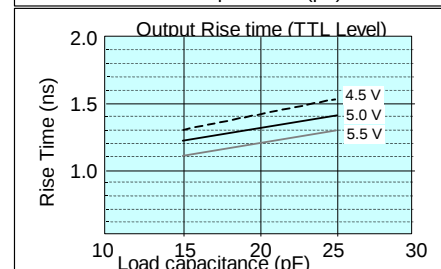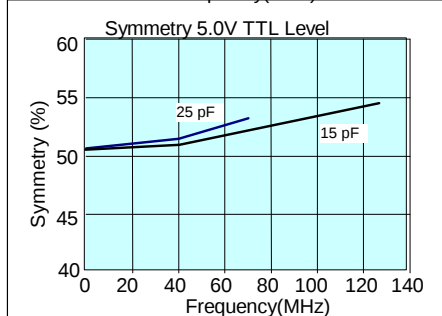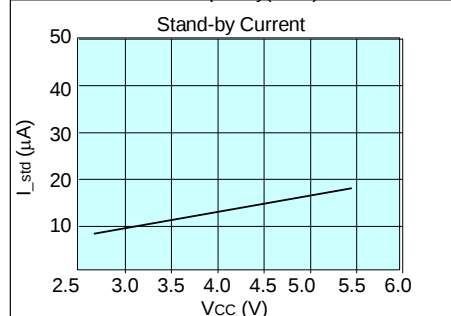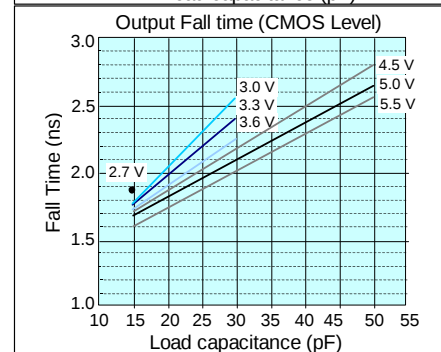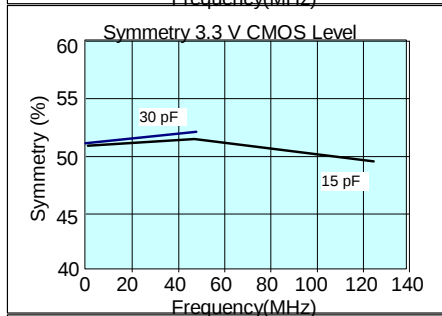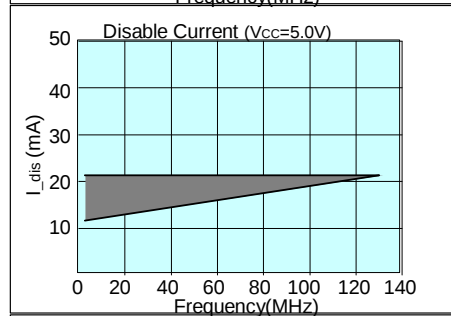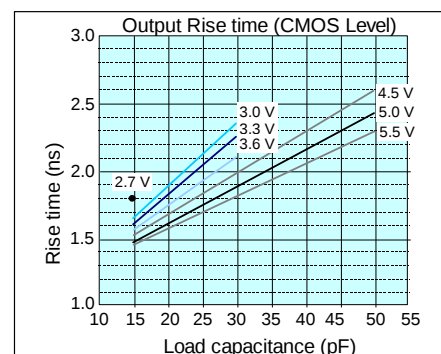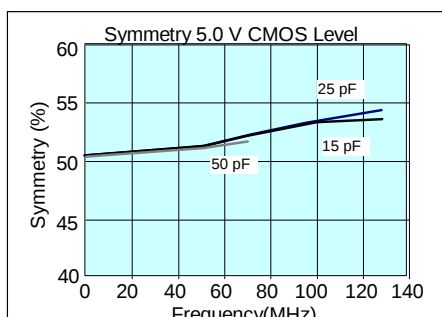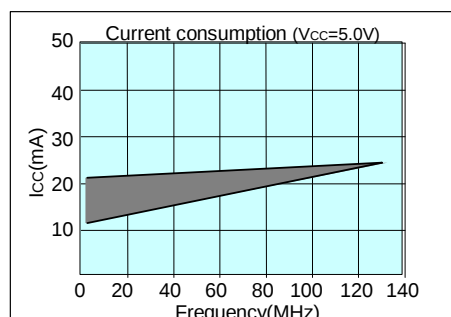

PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

WORKING FOR HIGH QUALITY

In order provide high quality and reliable products and services than meet customer needs,

Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired ISO/TS 16949 certification that is requested strongly by major automotive manufacturers as standard.

ISO/TS16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

► Explanation of the mark that are using it for the catalog

	► Pb free.
	► Complies with EU RoHS directive. *About the products without the Pb-free mark. Contains Pb in products exempted by EU RoHS directive. (Contains Pb in sealing glass, high melting temperature type solder or other.)
	► Designed for automotive applications such as Car Multimedia, Body Electronics, Remote Keyless Entry etc.
	► Designed for automotive applications related to driving safety (Engine Control Unit, Air Bag, ESC etc).

Notice

- This material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
- The information about applied data, circuitry, software, usage, etc. written in this material is intended for reference only. Seiko Epson does not assume any liability for the occurrence of customer damage or infringing on any patent or copyright of a third party. This material does not authorize the licensing for any patent or intellectual copyrights.
- When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- You are requested not to use the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes. You are also requested that you would not make the products available to any third party who may use the products for such prohibited purposes.
- These products are intended for general use in electronic equipment. When using them in specific applications that require extremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson in advance.
 - / Space equipment (artificial satellites, rockets, etc.) / Transportation vehicles and related (automobiles, aircraft, trains, vessels, etc.) / Medical instruments to sustain life / Submarine transmitters / Power stations and related / Fire work equipment and security equipment / traffic control equipment / and others requiring equivalent reliability.
- All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Epson:

[SG-8002JA64.0000M-PHBB:ROHS](#) [SG-8002JA 40.0000M-PCCL0:RoHS](#) [SG-8002JA 20.000M-PTMB-ROHS](#) [SG-8002JA 1.0000M-PCMB ROHS](#) [SG-8002JA 1.0000M-PTMB PURE SN](#) [SG-8002JA 1.0250M-PCCL0 ROHS](#) [SG-8002JA 1.2288M-PTMB ROHS](#) [SG-8002JA 1.5440M-PHMS PURE SN](#) [SG-8002JA 1.8432M-PCCB ROHS](#) [SG-8002JA 1.8432M-PCCL0 ROHS](#) [SG-8002JA 1.8432M-PCCL3 ROHS](#) [SG-8002JA 1.8432M-PHBL3 ROHS](#) [SG-8002JA 1.8432M-PTCL0 ROHS](#) [SG-8002JA 1.8432M-PTMB ROHS](#) [SG-8002JA 1.96608M-PHMB PURE SN](#) [SG-8002JA 10.0000M-PCMB ROHS](#) [SG-8002JA 10.0000M-PHCB ROHS](#) [SG-8002JA 10.0000M-PHCL3 ROHS](#) [SG-8002JA 100.0000M-PCMB PURE SN](#) [SG-8002JA 100.0000M-PCML0 PURE SN](#) [SG-8002JA 100.0000M-PCML0 ROHS](#) [SG-8002JA 100.0000M-PCML3 PURE SN](#) [SG-8002JA 11.2896M-PCBL3 ROHS](#) [SG-8002JA 110.0000M-PCCL0 ROHS](#) [SG-8002JA 110.0000M-PCCL3 ROHS](#) [SG-8002JA 12.0000M-PHCL3 ROHS](#) [SG-8002JA 125.0000M-PCCL3 ROHS](#) [SG-8002JA 14.3182M-PHCL0 ROHS](#) [SG-8002JA 14.7456M-PHMB ROHS](#) [SG-8002JA 14.7456M-PTBL0 ROHS](#) [SG-8002JA 15.5000M-PHCL3 ROHS](#) [SG-8002JA 16.0000M-PHBB ROHS](#) [SG-8002JA 16.0000M-PHCL3 ROHS](#) [SG-8002JA 16.0000M-PHML3 ROHS](#) [SG-8002JA 16.3840M-PCML3 ROHS](#) [SG-8002JA 18.6600M-PCCL0 ROHS](#) [SG-8002JA 18.6600M-PCCL3 ROHS](#) [SG-8002JA 19.2000M-PTCL3 ROHS](#) [SG-8002JA 19.6608M-PHML3 ROHS](#) [SG-8002JA 2.0000M-PHCL0 ROHS](#) [SG-8002JA 2.0480M-PTBL0 ROHS](#) [SG-8002JA 20.0000M-PCCL0 ROHS](#) [SG-8002JA 20.0000M-PCCL3 ROHS](#) [SG-8002JA 20.0000M-PCMB ROHS](#) [SG-8002JA 20.0000M-PCML0 ROHS](#) [SG-8002JA 20.0000M-PCML3 ROHS](#) [SG-8002JA 20.0000M-PHCB ROHS](#) [SG-8002JA 20.0000M-PHCL0 ROHS](#) [SG-8002JA 20.0000M-PHCL3 ROHS](#) [SG-8002JA 20.0000M-PHML3 ROHS](#) [SG-8002JA 24.0000M-PCBL3 ROHS](#) [SG-8002JA 24.0000M-PCCB ROHS](#) [SG-8002JA 24.0000M-PCCL3 ROHS](#) [SG-8002JA 24.0000M-PCMB ROHS](#) [SG-8002JA 24.0000M-PHCB ROHS](#) [SG-8002JA 25.0000M-PCCB ROHS](#) [SG-8002JA 25.0000M-PCCL0 ROHS](#) [SG-8002JA 25.0000M-PCMB PURE SN](#) [SG-8002JA 25.0000M-PCMB ROHS](#) [SG-8002JA 25.0000M-PCML0 ROHS](#) [SG-8002JA 25.0000M-PCML3 PURE SN](#) [SG-8002JA 25.0000M-PHBB ROHS](#) [SG-8002JA 25.0000M-PHCL3 ROHS](#) [SG-8002JA 26.8435M-PHCL3 ROHS](#) [SG-8002JA 28.2240M-PHBL0 ROHS](#) [SG-8002JA 3.6864M-PCCB ROHS](#) [SG-8002JA 3.6864M-PCCL0 ROHS](#) [SG-8002JA 3.6864M-PHCL0 ROHS](#) [SG-8002JA 3.6864M-PHCL3 ROHS](#) [SG-8002JA 3.6864M-PHML3 ROHS](#) [SG-8002JA 30.0000M-PTMB ROHS](#) [SG-8002JA 30.0000M-SHML3 ROHS](#) [SG-8002JA 32.0000M-PHMB PURE SN](#) [SG-8002JA 32.0000M-PHML0 ROHS](#) [SG-8002JA 32.7680M-PCBL0 PURE SN](#) [SG-8002JA 32.7680M-PHCL3 ROHS](#) [SG-8002JA 33.0000M-PHCL3 ROHS](#) [SG-8002JA 33.0000M-PHMB PURE SN](#) [SG-8002JA 34.0000M-PCMB ROHS](#) [SG-8002JA 37.0560M-PHMB ROHS](#) [SG-8002JA 37.5000M-PCML3 ROHS](#) [SG-8002JA 39.3216M-PHCL0 ROHS](#) [SG-8002JA 39.3216M-PHCL3 ROHS](#) [SG-8002JA 4.0000M-PHML0 ROHS](#) [SG-8002JA 4.1472M-PTCL3 ROHS](#) [SG-8002JA 4.9152M-PHCB ROHS](#) [SG-8002JA 40.0000M-PCBL3 ROHS](#) [SG-8002JA](#)

<u>40.0000M-PCMB ROHS</u>	<u>SG-8002JA</u>	<u>40.0000M-PCML0 ROHS</u>	<u>SG-8002JA</u>	<u>40.0000M-PCML3 ROHS</u>	<u>SG-8002JA</u>
<u>40.0000M-PHBB ROHS</u>	<u>SG-8002JA</u>	<u>40.0000M-PHBL3 ROHS</u>	<u>SG-8002JA</u>	<u>40.0000M-PHCL0 ROHS</u>	<u>SG-8002JA</u>
<u>40.0000M-PHCL3 ROHS</u>	<u>SG-8002JA</u>	<u>40.0000M-PHML0 ROHS</u>	<u>SG-8002JA</u>	<u>40.9600M-PHCL0 ROHS</u>	<u>SG-8002JA</u>
<u>41.4400M-PHCB ROHS</u>	<u>SG-8002JA</u>	<u>41.4400M-PHCL3 ROHS</u>	<u>SG-8002JA</u>	<u>41.4400M-PHML3 ROHS</u>	<u>SG-8002JA</u>
<u>44.2370M-PCBL3 ROHS</u>					