

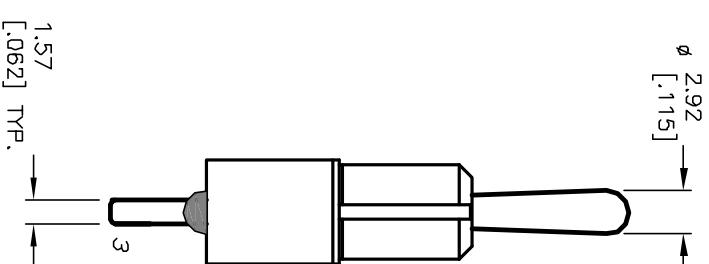
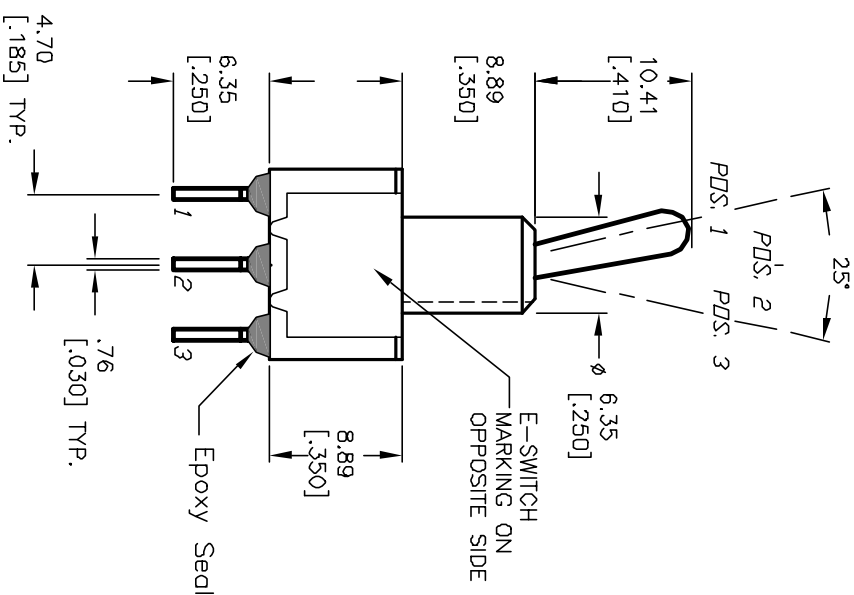
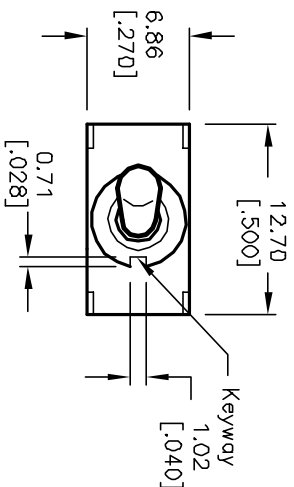
CIRCUIT: SPD1

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	DOWN
2-3	OPEN	2-1

() = Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NDS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC;
2A @250VAC
5. FIXED TERMINAL/MOVING CONTACT:
Copper Alloy W/Silver Plate.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @test level
9. OPERATING TEMP.: -30°C to +85°C

**E-SWITCH®**

				TITLE		
				100 SP-2 T1 B2 M3 Q E		
A	12560	REVISED AND REDRAWN	11/13/02	CJB		
REV.	ECN NO.	DESCRIPTION	DATE	CHKD		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED						
SCALE			DATE	DR	DWG	REV
2:1			11/13/02	CJB	T112054	A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[100SP2T1B2M3QE](#)