


RDT SERIES ROTARY DIP SWITCH


ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS




APPLICATIONS / MARKETS



Audio / Visual



Computer Peripherals




Consumer Electronics



Instrumentation



Telecommunication



Medical Equipment

RoHS

SPECIFICATIONS

Electrical Rating:
Switching: 42VDC, 150mA
Non-Switching: 42VDC, 200mA
Life Expectancy: 10,000 steps
Contact Resistance: 80mΩ Max.
Insulation Resistance: 100 MΩ Min. at 250VDC
Dielectric Strength: 250VAC
Operating Temperature:
-40°C to 85°C (Thru Hole)
-60°C to 125°C (SMT)
Actuation Force: 700 gf
Travel: dependent upon individual switch positions

FEATURES & BENEFITS

- Offers IP67 sealing protection
- Available in 4, 6, 8, 10 and 16 positions
- Right angle or vertical options
- SMT or thru hole options
- Gold contacts

PART NUMBER CONFIGURATOR

Series	Actuator	Code	Positions	Terminals	Packaging
RDT	A	R	04	P1	T
	A - Arrow Flush	R - Real	04	P1 - TH 3x3 terminals	T - Tube
	B - Arrow Shaft	C - Complementary	06	P2 - TH 3x2 terminals	R - Tape & Reel
	C - Cross		08	S1 - SM 3x3 terminals	
	D - Arrow .1 High		10	S2 - SM 3x2 terminals	
			16	R1 - Angled 5.08 spacing	
				R2 - Angled 2.54 spacing	

Specifications subject to change without notice



E-SWITCH®


www.e-switch.com

800.867.2717

2

RDT SERIES ROTARY DIP SWITCH

BODY DIMENSIONS

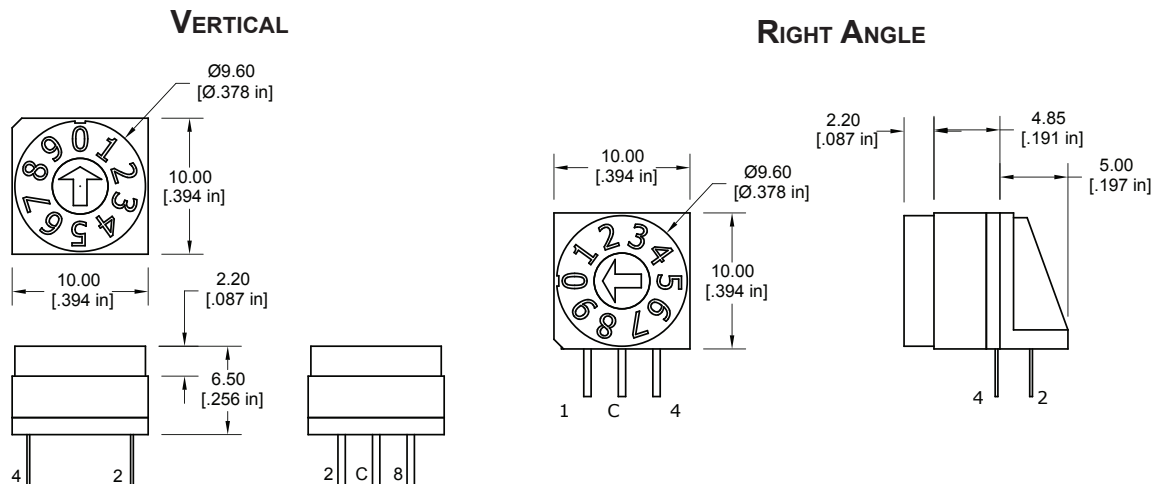

GENERAL CODES

REAL CODE

	C	1	2
0	●		
1	●	●	
2	●		●
3	●	●	●

4 POSITION

COMPLEMENT CODE

	C	$\bar{1}$	$\bar{2}$
0	●	●	●
1	●		●
2	●	●	
3	●		

4 POSITION

REAL CODE

	C	1	2	4	8
0	●				
1	●	●			
2	●		●		
3	●	●	●		
4	●			●	
5	●	●		●	
6	●		●	●	
7	●	●	●	●	
8	●				●
9	●	●			●

10 POSITION

COMPLEMENT CODE

	C	$\bar{1}$	$\bar{2}$	$\bar{4}$	$\bar{8}$
0	●	●	●	●	●
1	●		●	●	●
2	●	●		●	●
3	●	●	●		●
4	●	●	●	●	
5	●		●		●
6	●	●		●	●
7	●	●	●	●	●
8	●				●
9	●	●	●	●	●

10 POSITION

REAL CODE

	C	1	2	4	8
0	●				
1	●	●			
2	●		●		
3	●	●	●		
4	●			●	
5	●	●		●	

6 POSITION

COMPLEMENT CODE

	C	$\bar{1}$	$\bar{2}$	$\bar{4}$	$\bar{8}$
0	●	●	●	●	●
1	●		●	●	●
2	●	●		●	●
3	●	●	●		●
4	●	●	●	●	
5	●		●		●

6 POSITION

REAL CODE

	C	1	2	4	8	
0	●					0
1	●	●				1
2	●		●			2
3	●	●	●			3
4	●			●		4
5	●	●		●		5
6	●		●		●	6
7	●	●	●	●		7
8	●				●	8
9	●	●			●	9
10	●		●		●	A
11	●	●	●		●	B
12	●			●	●	C
13	●	●		●	●	D
14	●		●	●	●	E
15	●	●	●	●	●	F

16 POSITION

COMPLEMENT CODE

	C	$\bar{1}$	$\bar{2}$	$\bar{4}$	$\bar{8}$	
0	●	●	●	●	●	0
1	●		●	●	●	1
2	●	●		●	●	2
3	●	●	●		●	3
4	●	●	●	●		4
5	●		●		●	5
6	●	●			●	6
7	●	●	●	●	●	7
8	●		●	●	●	8
9	●	●	●	●	●	9
10	●	●		●		A
11	●	●		●	●	B
12	●	●	●			C
13	●	●		●		D
14	●		●	●		E
15	●	●	●	●		F

16 POSITION

REAL CODE

	C	1	2	4	8
0	●				
1	●	●			
2	●		●		
3	●	●	●		
4	●			●	
5	●	●		●	
6	●		●	●	
7	●	●	●	●	

8 POSITION

COMPLEMENT CODE

	C	$\bar{1}$	$\bar{2}$	$\bar{4}$	$\bar{8}$
0	●	●	●	●	●
1	●		●	●	●
2	●	●		●	●
3	●	●	●		●
4	●	●	●	●	
5	●		●		●
6	●	●			●
7	●	●	●		●



8 POSITION





RDT SERIES ROTARY DIP SWITCH

ACTUATOR OPTIONS



"A" ACTUATOR

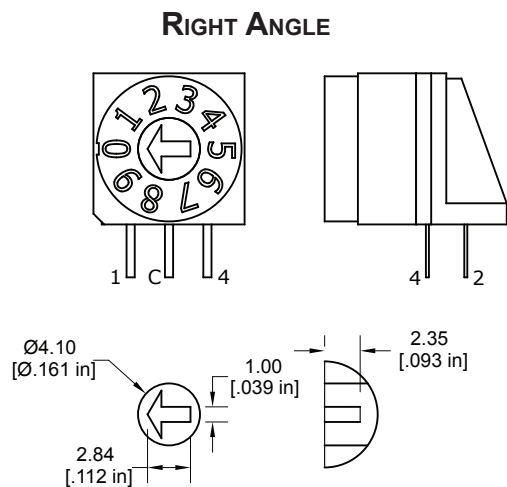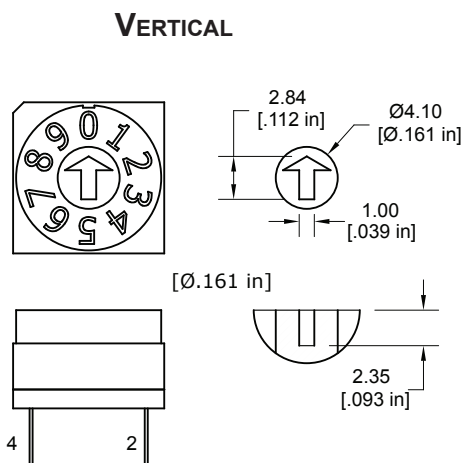

"B" ACTUATOR

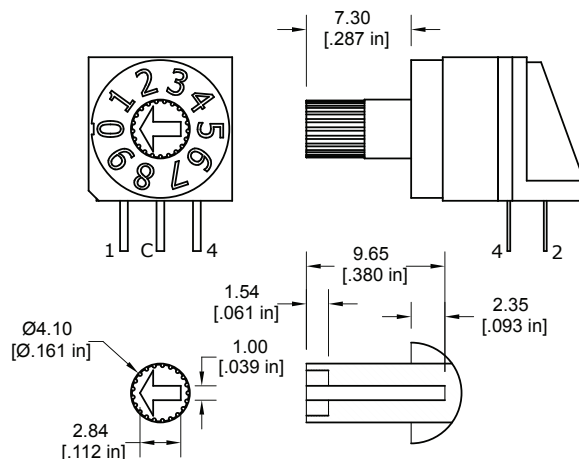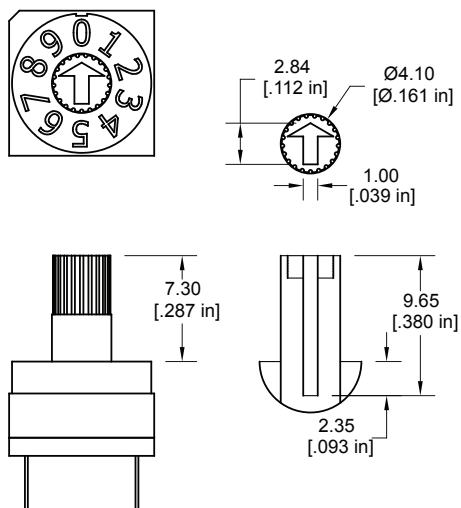

"C" ACTUATOR

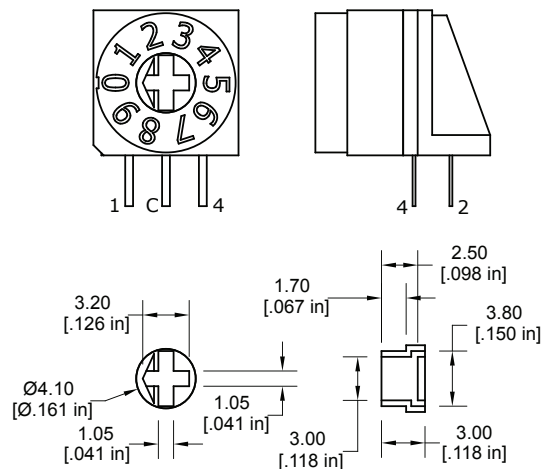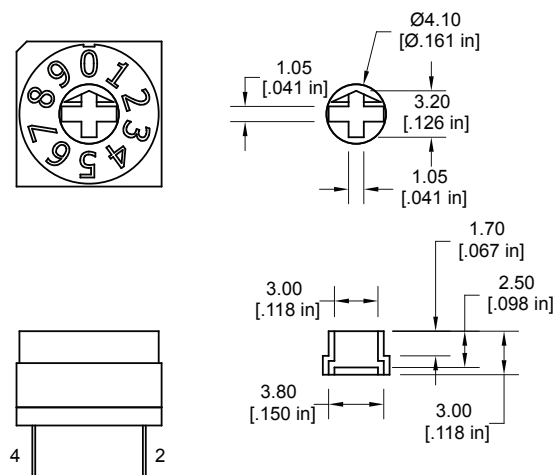


RDT SERIES ROTARY DIP SWITCH


ACTUATOR OPTIONS (CONT.)

VERTICAL

"D" ACTUATOR


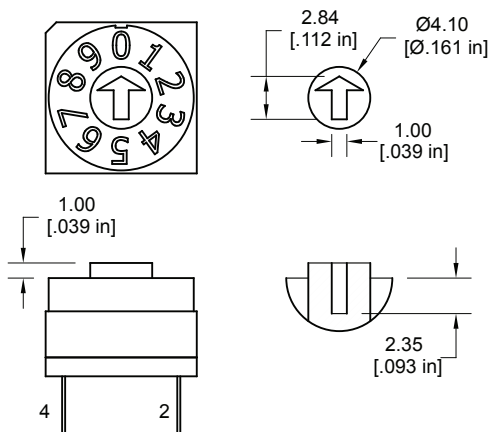


RIGHT ANGLE


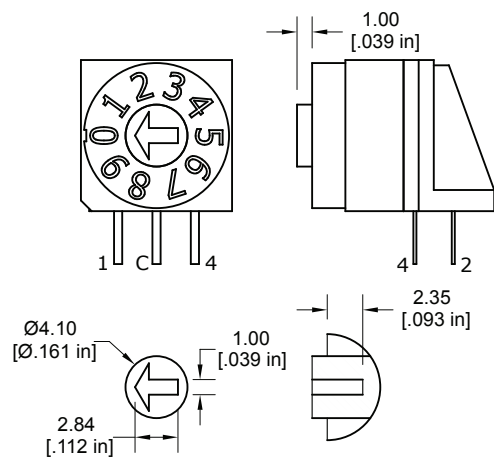


TERMINATION OPTIONS

P1 - VERTICAL

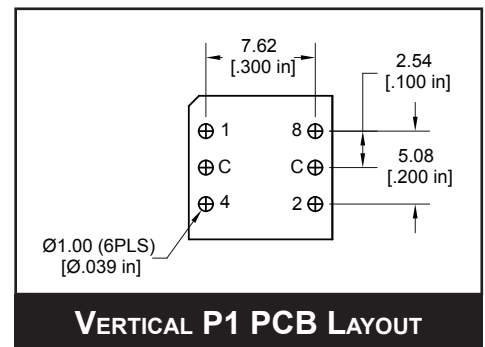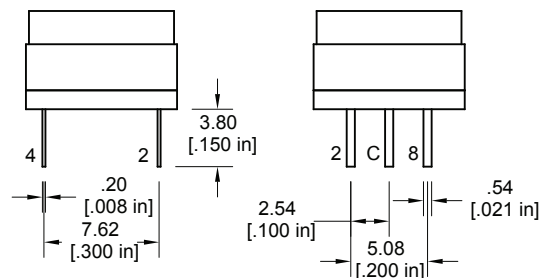



P2 - VERTICAL

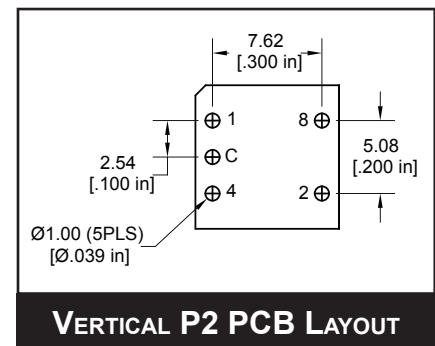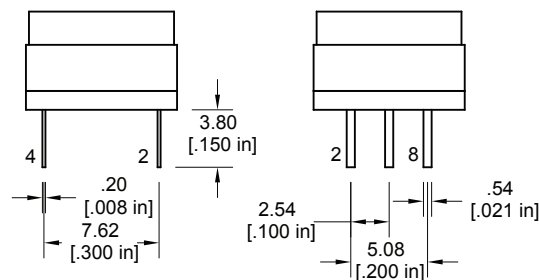

RDT SERIES ROTARY DIP SWITCH



TERMINATION OPTIONS (CONT.)

S1 - VERTICAL

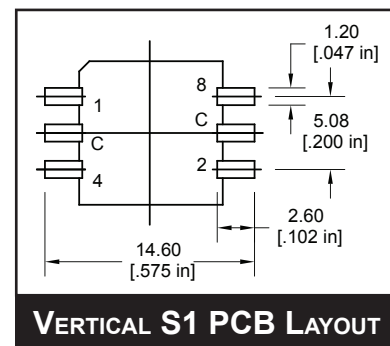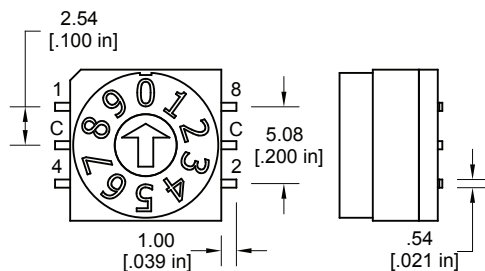



VERTICAL S1 PCB LAYOUT

S2 - VERTICAL

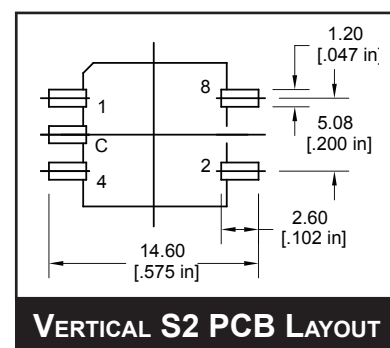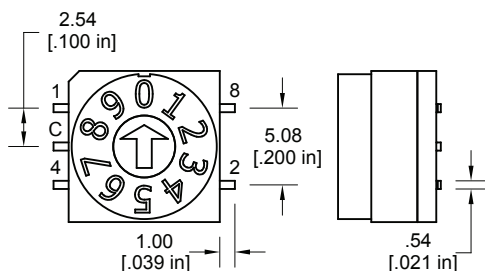



VERTICAL S2 PCB LAYOUT

R1 - RIGHT ANGLE

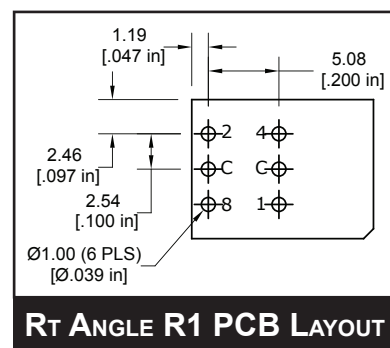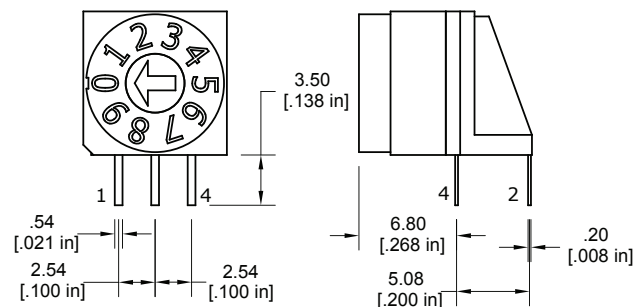

Rt ANGLE R1 PCB LAYOUT

R2 - RIGHT ANGLE

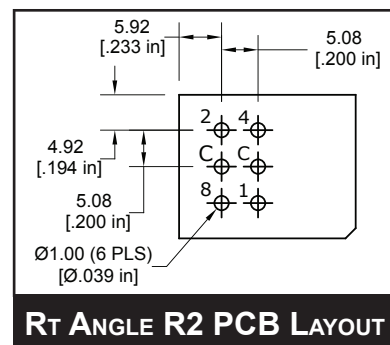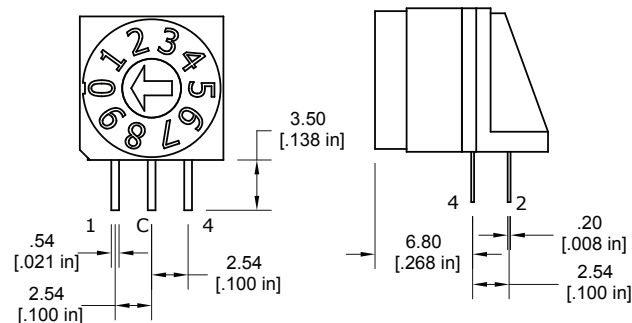

Rt ANGLE R2 PCB LAYOUT



E-SWITCH®

www.e-switch.com

800.867.2717

6

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

E-Switch:

[RDTAR10P1T](#) [RDTAR10P2T](#) [RDTGR10R2T](#) [RDTCR16P1T](#) [RDTCR16S1R](#) [RDTBC04P1T](#) [RDTAR10R2T](#)
[RDTDR04P1T](#) [RDTAR10S2R](#) [RDTBR10P1T](#) [RDTBR08P1T](#) [RDTAR10R1T](#) [RDTBR04P2T](#) [RDTCR16R2T](#)
[RDTCR04S2R](#) [RDTBR04P1T](#) [RDTAR10S1R](#) [RDTCR16R1T](#) [RDTCR10P1T](#) [RDTBC08P1T](#) [RDTDR10P1T](#)
[RDTCR10R2T](#)