


ST5 SERIES TOGGLE SWITCH

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS




APPLICATIONS / MARKETS




Floor Care Appliances




Commercial Appliances




Industrial Controls



Medical / Dental



HVAC



Vending Machines

RoHS

SPECIFICATIONS

Contact Rating: 16(8)A 125/250VAC μ T125/55
20(8)A 125/250VAC μ T125/55
20A 6-30VDC μ T125/55

Electrical Life: 10,000 Cycles

Contact Resistance: 50m Ω Max. initial

Insulation Resistance: 50M Ω Min.

Dielectric Strength: 1500V RMS

Operating Temperature: -10°C to 125°C

Storage Temperature: -10°C to 125°C

Circuit Function: SP or DP
2 or 3 Position

Agency Approvals: cURus

Moisture Protection: IP40

Panel Thickness: 1-8mm

FEATURES & BENEFITS

- Multiple termination options
- Single or double pole
- Available in both 2 or 3 position circuits
- Multiple Actuator options

PART NUMBER CONFIGURATOR

Series	No. of Poles	Function	Rating	Actuator	Termination
S T 5	S D	P 1 2 3 4 6 7 8 9 10	1 2 4	T 2	C S S
ST5	S - Single Pole D - Double Pole	P1 - OFF - (ON) P2 - OFF - ON P3 - ON - ON P4 - (OFF) - ON P6 - (ON) - ON P7 - ON - (ON) P8 - ON - OFF - ON P9 - ON - OFF - (ON) P10 - (ON) - OFF - (ON)	1 - 16(8)A 125/250VAC μ T125/55 2 - 20(8)A 125/250VAC μ T125/55 4 - 20A 6-30VDC μ T125/55	T1 - 17mm Metal Bat T2 - 22mm Plastic Bat	C1 - 3/16 Quick Connect C2 - 1/4 Quick Connect S1 - Solder Lug S2 - Screw Terminal

* () denotes momentary

Specifications subject to change without notice 6.22.2022



E-SWITCH®


www.e-switch.com

800.867.2717

1

ST5 SERIES TOGGLE SWITCH


No. of Pole AND Function Options

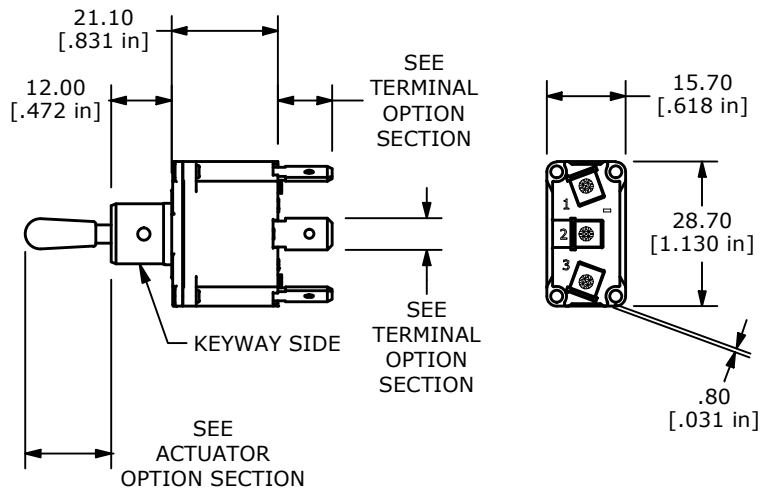

S - SINGLE POLE

			
FUNCTION	POS.1	POS.2	POS.3
P1*	OFF	N/A	(ON)=(2-3)
P2*	OFF	N/A	ON=2-3
P3	ON=1-2	N/A	ON=2-3
P4*	(OFF)	N/A	ON=2-3
P6	(ON)=(1-2)	N/A	ON=2-3
P7	ON=1-2	N/A	(ON)=(2-3)
P8	ON=1-2	OFF	ON=2-3
P9	ON=1-2	OFF	(ON)=(2-3)
P10	(ON)=(1-2)	OFF	(ON)=(2-3)

() = MOMENTARY
* = NO TERMINAL 1

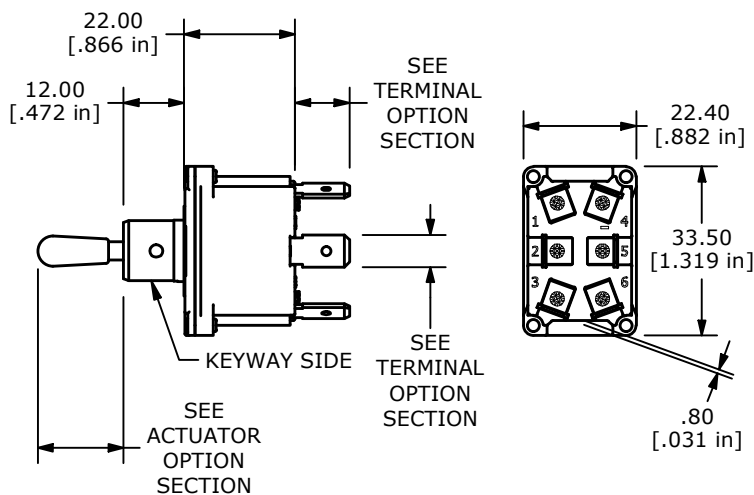




D - DOUBLE POLE

			
FUNCTION	POS.1	POS.2	POS.3
P1*	OFF	N/A	(ON)=(2-3),(5-6)
P2*	OFF	N/A	ON=2-3,5-6
P3	ON=1-2,4-5	N/A	ON=2-3,5-6
P4*	(OFF)	N/A	ON=2-3,5-6
P6	(ON)=(1-2),(4-5)	N/A	ON=2-3,5-6
P7	ON=1-2,4-5	N/A	(ON)=(2-3),(5-6)
P8	ON=1-2,4-5	OFF	ON=2-3,5-6
P9	ON=1-2,4-5	OFF	(ON)=(2-3),(5-6)
P10	(ON)=(1-2),(4-5)	OFF	(ON)=(2-3),(5-6)



() = MOMENTARY
* = NO TERMINAL 1 & 4

ST5 SERIES TOGGLE SWITCH

ACTUATOR OPTIONS

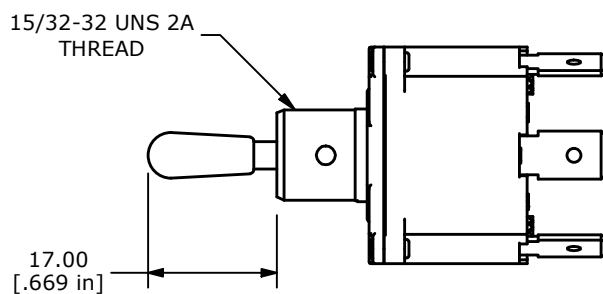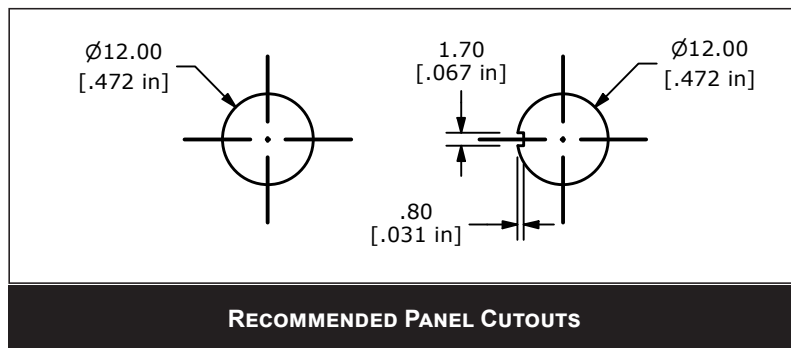

T1 = 17mm METAL BAT

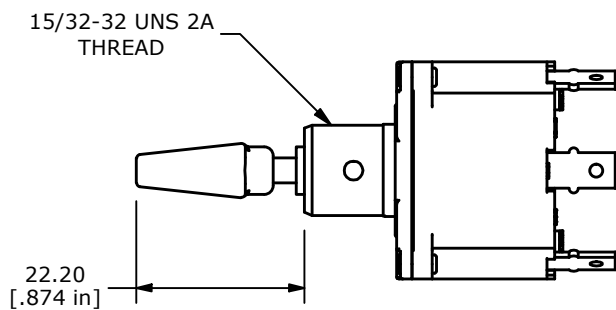

T2 = 22mm PLASTIC BAT



E-SWITCH®



www.e-switch.com

800.867.2717



3

ST5 SERIES TOGGLE SWITCH



TERMINAL OPTIONS

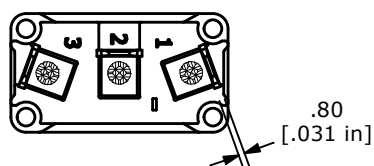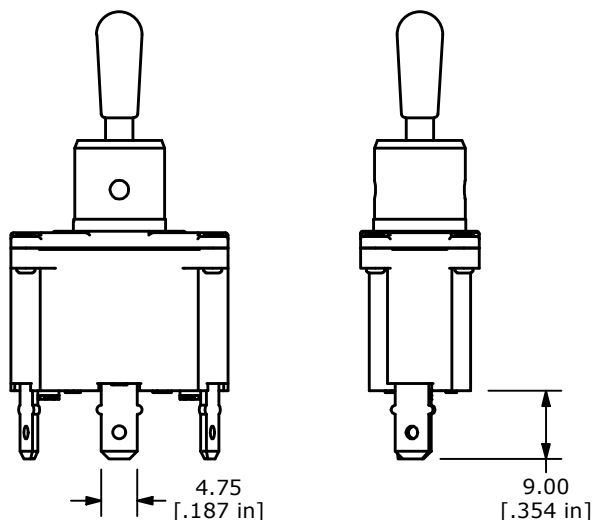



C1 = 3/16 QUICK CONNECT

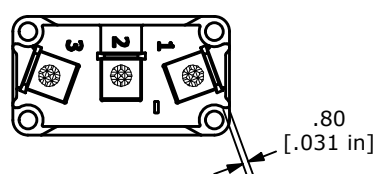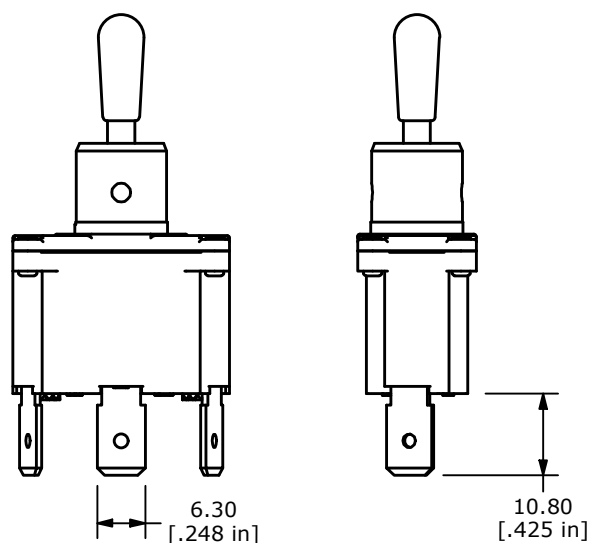

C2 = 1/4 QUICK CONNECT

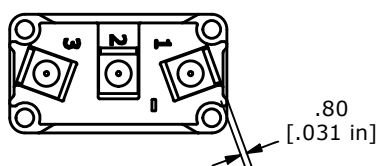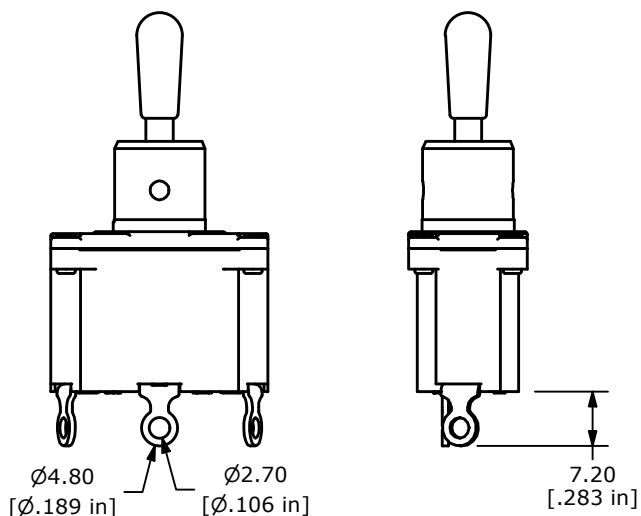

S1 = SOLDER LUG

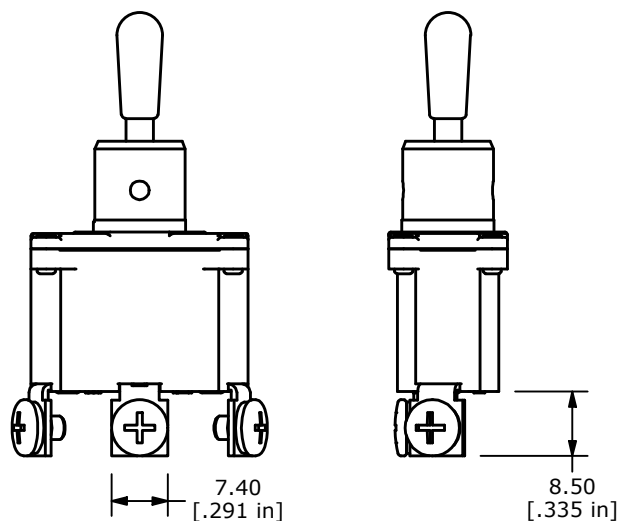

S2 = SCREW TERMINAL



E-SWITCH®

www.e-switch.com

800.867.2717

4

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[ST5SP11T1C1](#)