



SERIES TL1105 SWITCHES

TACT SWITCHES - 6mm x 6mm

TACT
SWITCHES

NAVIGATION
SWITCHES

PUSHBUTTON
SWITCHES

TOGGLE
SWITCHES

ROCKER
SWITCHES

SLIDE
SWITCHES

SNAP-ACTION
SWITCHES

DIP
SWITCHES

KEYLOCK
SWITCHES

ROTARY
SWITCHES

DETECTOR
SWITCHES

CAP
OPTIONS



FEATURES & BENEFITS

- ▶ Reliable dome contact technology
- ▶ Strong tactile/audible feedback
- ▶ Multiple operating force options

APPLICATIONS/MARKETS

- ▶ Telecommunications
- ▶ Consumer Electronics
- ▶ Audio/visual
- ▶ Medical
- ▶ Testing/instrumentation
- ▶ Computer/servers/peripherals

SPECIFICATIONS

Contact Rating:	50mA @ 12 VDC (50mA @ 50VDC-gold)
Life Expectancy:	100,000 cycles
Contact Resistance:	100mΩ max., typical @ 2-4 VDC 100mA for both silver and gold plated contacts
Insulation Resistance:	100MΩ min.
Dielectric Strength:	250 VAC
Actuation Force:	100 ± 50 gf, 160 ± 50 gf, 250 ± 50 gf
Operating Temperature:	-20°C to 70°C
Travel:	0.25 Typ

MATERIALS

Housing:	Nylon or PBT
Actuator:	Nylon, Acetal or PBT
Cover:	Polyester
Contacts:	Gold or silver plated
Terminals:	Silver plated brass



HOW TO ORDER

SERIES	MODEL NO.	ACTUATOR ("L" Dimension)	OPERATING FORCE	CONTACT MTL/ TERMINATION	CAP (Where Avail.)	CAP COLOR
TL TLE = Earth Ground	1105	(None) = 4.3mm A = 5.0mm B = 9.5mm C = 8.0mm D = 13.0mm E = 7.3mm F = 7.0mm G = 9.7mm H = 12.5mm K = 13.5mm L = 17.0mm P = 8.5mm Y = 16.3mm T = 2.4mm ☐ SP = 2.8mm ☐	F100 F160 F250	Q = Silver R = Gold	See Cap Options Caps available for SP option only.	

☐ – Square Snap-on Actuator Head
"L" Dimension is 7.5mm

TL	1105 (Rt. Angle)	V = 3.85mm W = 3.15mm X = 5.85mm R = 6.15mm M = 6.85mm S = 8.35mm N = 11.85mm Q = 15.85mm J = 2.4mm ☐ JA = 2.8mm ☐	F100 F160 F250	Q = Silver R = Gold	See Cap Options Caps available for JA option only.	
----	---------------------	---	----------------------	------------------------	--	--

☐ – Square Snap-on Actuator Head
"L" Dimension is 6.35mm





Example Ordering Number

TL-1105-SP-F160-Q-1R RED


Specifications subject to change without notice 2.28.2018



TL 1105

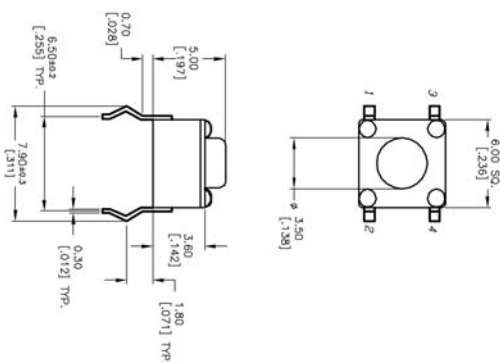



SCHEMATIC




P.C. MOUNTING

TLE 1105

TLE (EARTH TERMINAL)

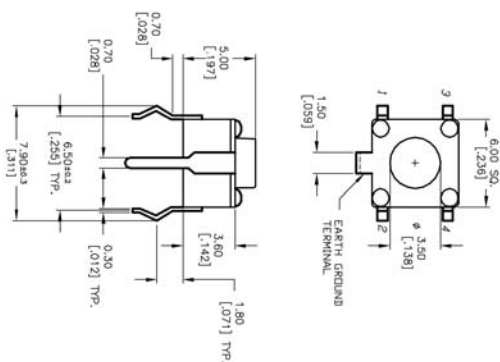

SCHEMATIC





P.C. MOUNTING


TL 1105 T



Model No.	'S' Dim.
TL1105T	2.4 mm
TL1105SP	2.8 mm

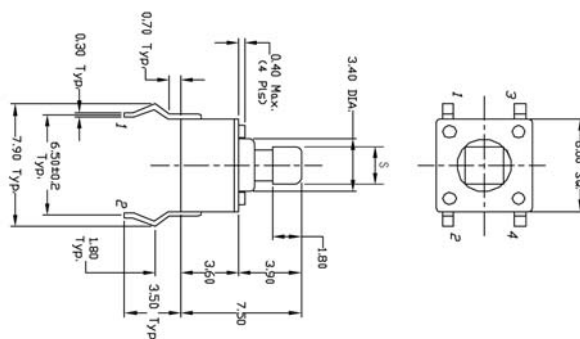

SCHEMATIC



P.C. MOUNTING

TACT
SWITCHESNAVIGATION
SWITCHESPUSHBUTTON
SWITCHESTOGGLE
SWITCHESROCKER
SWITCHESSLIDE
SWITCHESSNAP-ACTION
SWITCHESDIP
SWITCHESKEYLOCK
SWITCHESROTARY
SWITCHESDETECTOR
SWITCHESCAP
OPTIONS

TACT
SWITCHESNAVIGATION
SWITCHESPUSHBUTTON
SWITCHESTOGGLE
SWITCHESROCKER
SWITCHESSLIDE
SWITCHESSNAP-ACTION
SWITCHESDIP
SWITCHESKEYLOCK
SWITCHESROTARY
SWITCHESDETECTOR
SWITCHESCAP
OPTIONS



SERIES TL1105 SWITCHES

TACT SWITCHES - 6mm x 6mm

TL 1105 J



Model No.	'S' Dim.
TL1105J	2.4 mm
TL1105JA	2.8 mm

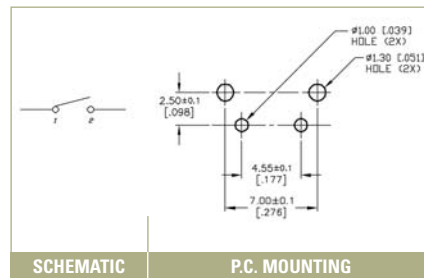
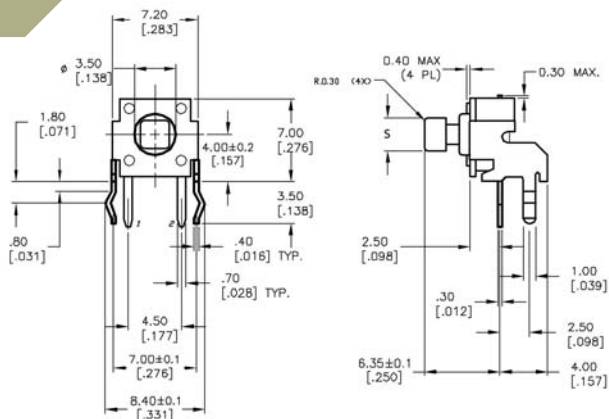


SCHEMATIC

P.C. MOUNTING

TL 1105

RIGHT ANGLE

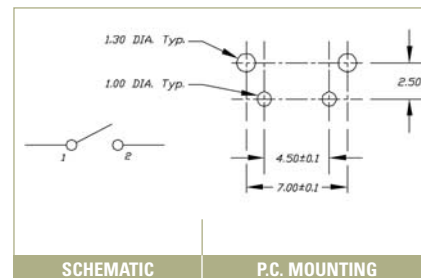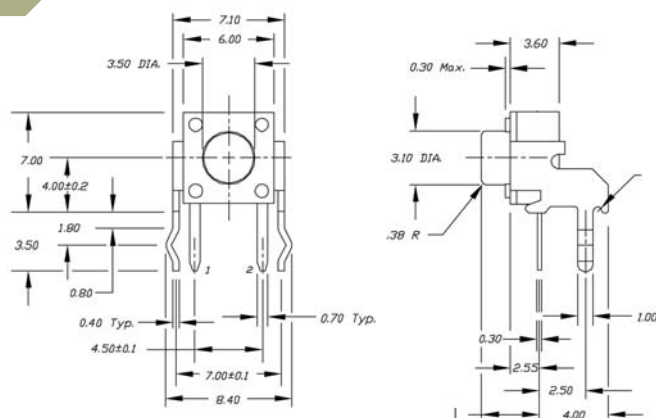

SCHEMATIC

P.C. MOUNTING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

E-Switch:

[TL1105BF250Q](#) [TL1105JAF250Q](#) [TL1105WF100Q](#) [TL1105EF250Q](#) [TL1105AF250Q](#) [TL1105SF250Q](#)
[TL1105RF160Q](#) [TL1105EF160Q](#) [TL1105QF160Q](#) [TL1105AF160Q](#) [TL1105MF160Q](#) [TL1105BF160Q](#) [TL1105JF160Q](#)
[TL1105NF160Q](#) [TL1105TF160Q](#) [TL1105SF160Q](#) [TL1105XF160Q](#) [TL1105CF160Q](#) [TL1105LF160Q](#)
[TL1105WF160Q](#) [TL1105DF160Q](#) [TL1105WF250Q](#) [TL1105EF100Q](#) [TL1105SPF100Q](#) [TL1105RF250Q](#)
[TL1105VF100Q](#) [TLE1105F160Q](#) [TL1105SF100Q](#) [TL1105CF250Q](#) [TL1105JAF160Q](#) [TL1105SPF160Q](#)
[TL1105VF160Q](#) [TLE1105BF160Q](#) [TLE1105AF160Q](#) [TL1105BF100Q](#) [TL1105AF100Q](#) [TL1105LF250Q](#)
[TL1105VF250Q](#) [TL1105DF100Q](#) [TL1105F100Q](#) [TL1105NF250Q](#) [TLE1105DF160Q](#) [TL1105JAF100Q](#)
[TL1105LF100Q](#) [TL1105DF250Q](#) [TL1105RF100Q](#) [TL1105SPF250Q](#) [TL1105F160Q](#) [TL1105F250Q](#) [TL1105AF160R](#)
[TL1105HF250R](#) [TL1105PF160Q](#) [TL1105FF160Q](#) [TL1105GF160Q](#) [TL1105CF100Q](#) [TL1105DF160R](#) [TL1105FF100Q](#)
[TL1105FF250Q](#) [TL1105GF250Q](#) [TL1105HF100Q](#) [TL1105HF160Q](#) [TL1105JAF100Q1RBLK](#)
[TL1105JAF160Q1RRRED](#) [TL1105JAF160R1RBLK](#) [TL1105JF100Q](#) [TL1105KF160Q](#) [TL1105KF250Q](#) [TL1105PF100Q](#)
[TL1105PF250Q](#) [TL1105QF160R](#) [TL1105RF160R](#) [TL1105SF160R](#) [TL1105SPF100Q1RBLK](#)
[TL1105SPF160Q1RBLK](#) [TL1105SPF160Q1RWHT](#) [TL1105SPF160R](#) [TL1105TF160R](#) [TL1105TF520Q](#)
[TL1105VF160R](#) [TL1105WF160R](#) [TL1105XF100Q](#) [TL1105XF160R](#) [TL1105XF250Q](#) [TL1105YF100Q](#) [TL1105YF160Q](#)
[TL1105YF250Q](#) [TL1105TF100Q](#) [TL1105KF250R](#) [TLE1105CF160Q](#) [TLE1105PF100Q](#) [TLE1105BF250Q](#)
[TLE1105F250Q](#) [TLE1105FF160Q](#) [TLE1105GF160Q](#) [TLE1105SPF160Q](#) [TLE1105F100Q](#) [TLE1105EF250Q](#)
[TLE1105SPF160R](#) [TL1105SPF160R1SBLK](#) [TL1105SPF160R1RBLK](#)