



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

AC/DC SWITCHING POWER
SUPPLY
SINGLE CHANNEL OUTPUT
75 WATTS

ESS75 SERIES

General Description



Features

1. Smaller than competitors by 15-20%
2. Operating temp shows full load at 50° C (122° F), can operate at temperatures up to 71°C
3. Five-year guarantee
4. Over-current protection
5. Over-voltage protection
6. Remote Sensing (sense line) available
7. Can meet medical and appliance standards
8. Low leakage < 500μA

Options

- Remote Control optional
- Remote sensing available
- DIN Rail available
- “-J” Molex connector option

Application

Broad needs

Input

Input Voltage: AC100~240V
Input Voltage Range: AC85~264V (DC110~350V)

Frequency: 50/60Hz
Frequency Range: 47~440Hz
Phase: Single
Inrush Current: *1 14A at 100V; 28A at 200V



ETA USA
16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com
email at: sales@eta-usa.com



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Output Characteristic		Models						
	Unit	ESS75-3.3	ESS75-05	ESS75-12	ESS75-15	ESS75-24	ESS75-36	ESS75-48
Output Voltage	Vdc	3.3	5.0	12	15	24	36	48
Output Current	A	15	15	6.3	5	3.2	2.1	1.6
Ripple & Noise(max)	mVpp	120	120	150	150	150	250	250
Voltage Adjust Range	V	2.97~3.63	4.50~5.50	10.8~13.2	13.5~16.5	21.6~26.4	32.4~39.6	43.2~52.8
Rise time	mS	30 mS typ						
Hold up time	mS	30 mS max						
Regulation								
a. Line Regulation [max]	mV	20	20	48	60	96	144	192
b. Load Regulation	mV	40	40	100	120	150	240	240
c. Temperature Coefficient	0 to 50°C	50	50	120	150	240	360	480
	-10 to 0°C	60	60	150	180	290	450	600
d. Drift(maximum)	mV	20	20	48	60	96	144	192
Efficiency *1	%	At AC100V 78%-87.5% At AC 200V 80%-89.5%						
Power Factor *1		0.89-0.99						

Note: If you would like to buy a wire harness with this power supply, you may either order the wire harness through Molex or directly through ETA-USA. Please observe the following table:

ETA POWER SUPPLY	INPUT HOUSING -MOLEX	OUTPUT HOUSING -MOLEX	TERMINAL	ETA WIRE HARNESS # ; input/output
ESS75-3.3J				
ESS75-05J				
ESS75-12J				
ESS75-15J	0010-63-3044- (5199-04)	0009-50-1063- (5196-06)	5194PBT(L)	WH-ESS75-J; 40cm WIRE HARNESS
ESS75-24J				
ESS75-36J				
ESS75-48J				



ETA USA
16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com
email at: sales@eta-usa.com



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Environmental Specification	
Operating Temperature*3	-10 to +71 °C
Operating Humidity	20~90% RH
Storage Temperature	-30 to +85 °C
Storage Humidity	10~95% RH [non-condensing]
Withstanding Voltage	Primary-Secondary AC3,000V for 1minute Primary-Frame Ground AC2,500V for 1minute Secondary-Frame Ground AC1,000V for 1minute *Sensory Current: Secondary Frame Ground (20[mA])/Others (10[mA])
Isolation Resistance	Primary-Secondary-Frame Ground 100MΩ(minimum) by DC500V insulation tester
Vibration	5~10Hz:10mm double amplitude,10~55Hz:19.6m/s ² ,30 minute cycle each along X,Y,Z axes(non-operating)
Shock	196 m/s ² on x,y,z axis
Cooling	Convection
Leakage current	500μA
MTBF	>210,000 hours
Environmental Agencies	
Line Conducted Noise [EMI]	Built to meet FCC-B, VCCI-B, CISPR22-B, EN55022-B
Line Harmonic Distortion/Current	IEC61000-3-2 Compliant
Safety	CAN/CSA C22.2 No.60950-1-03 Approved CAN/CSA C22.2 No.107.1-01 Approved Approved CE Marking : EN60950-1:2001+A11:2004 (LVD) Declared
Function/Protection	
Over current Protection	Operate at 105% min of rated current, automatic return
Over voltage Protection	Input reentry at shutdown
Remote Sense	Available
Remote Control	Available
Series Operation	Available
Parallel Operation	Not Available (N+1 Operation is Applicable by Diode-OR)
Driving Indicator	Power Source on LED indication; Green
Mechanical	
Dimension [mm]	33 W × 131 L × 79 H
Weight [g] (typical)	350

Conditions:

*1 Rated input and Rated output

*2 at Output current quick change 25% to 75%


*3 At 100% load (convection cooling)



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Derating Curves

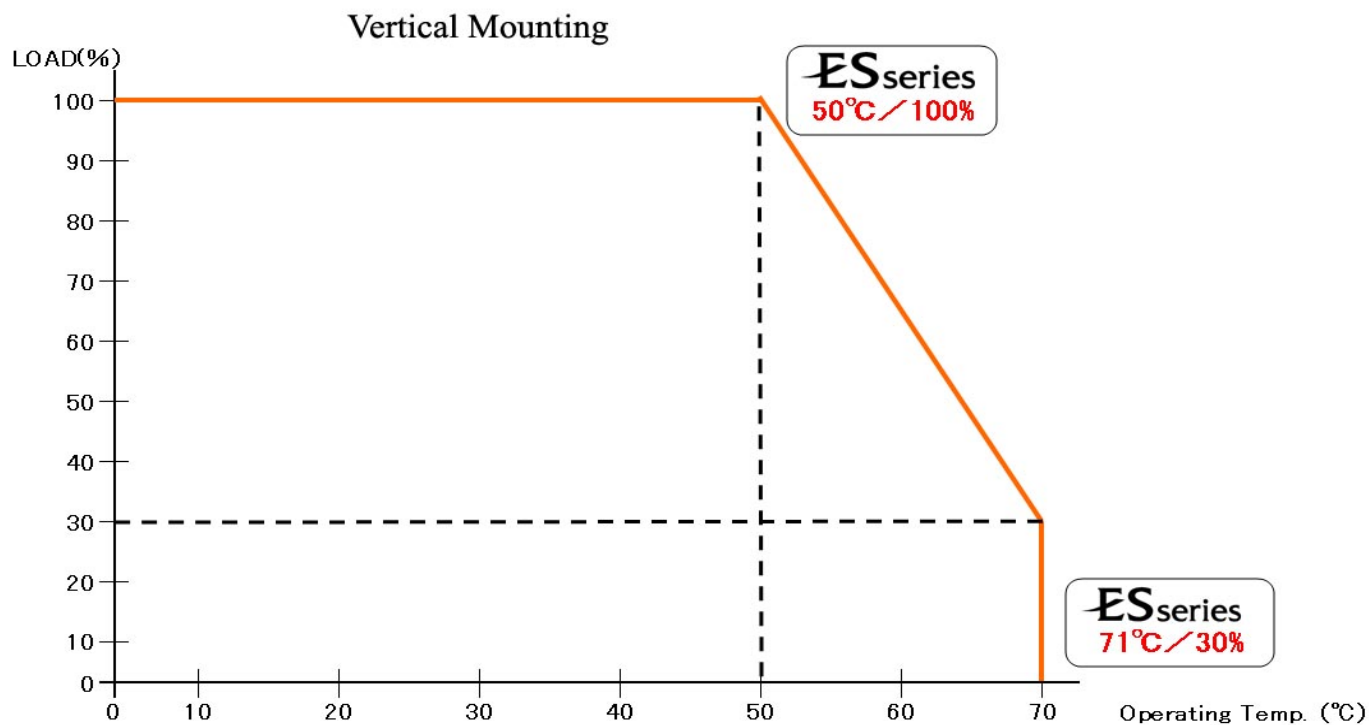

3.3 and 5V Horizontal



ETA USA


16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com
email at: sales@eta-usa.com




ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

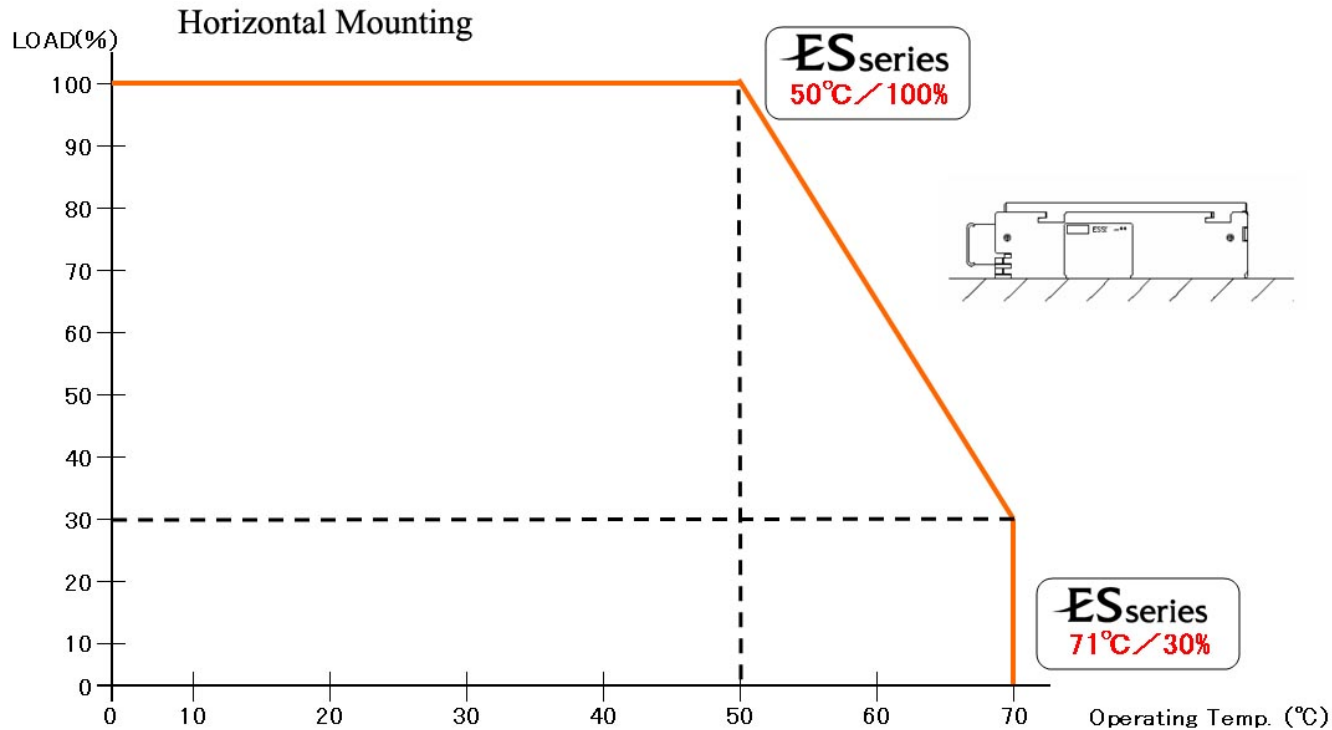

12V to 48V Horizontal

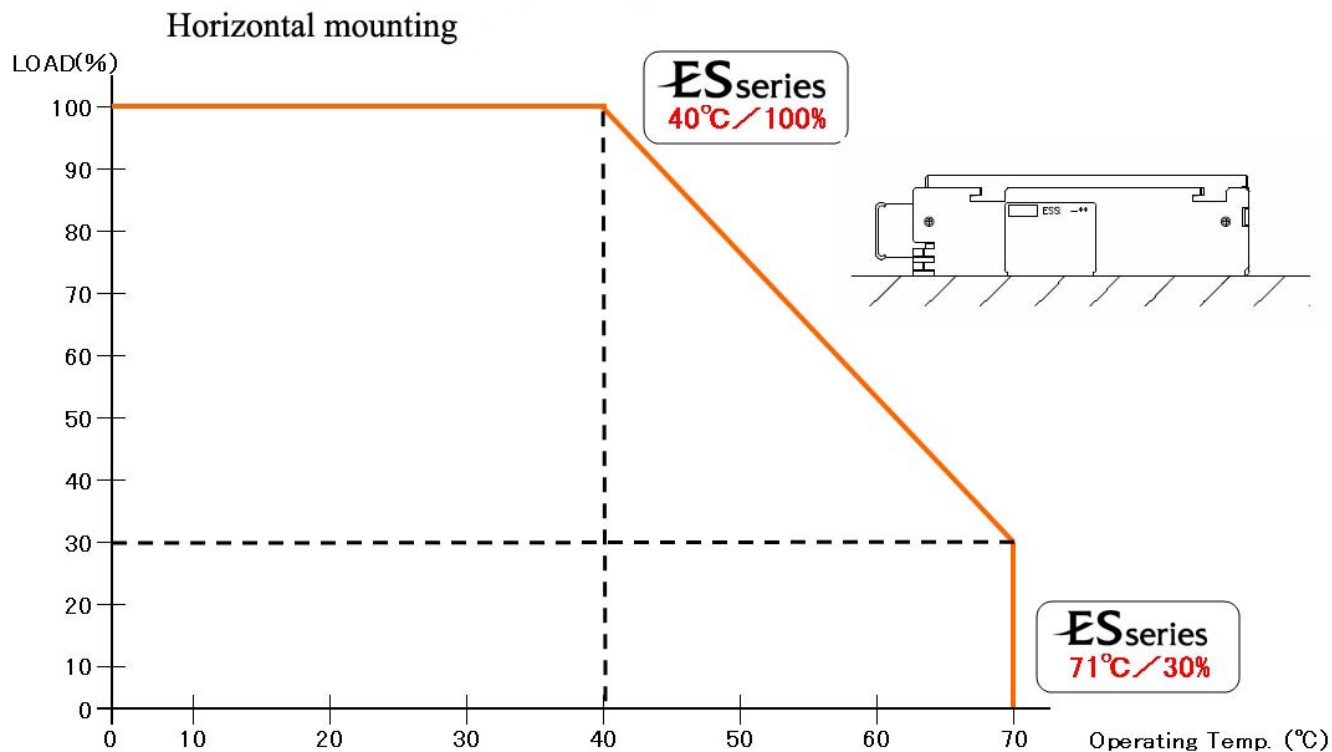


ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753


Visit us at: www.eta-usa.com
email at: sales@eta-usa.com

Efficiency Curves

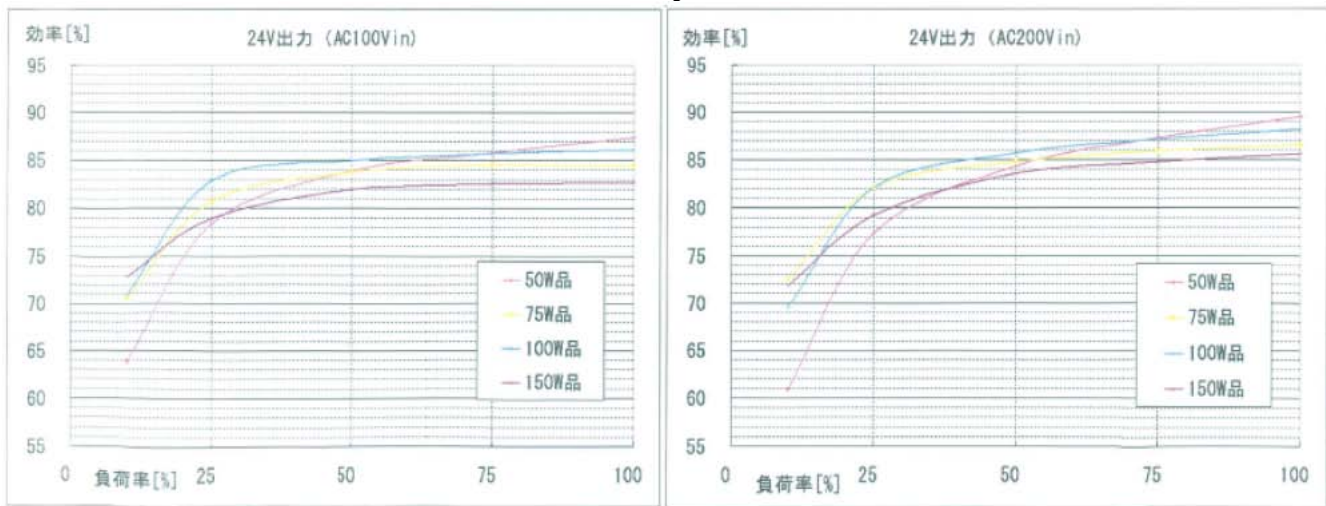

Mechanical Drawings

ESS 75

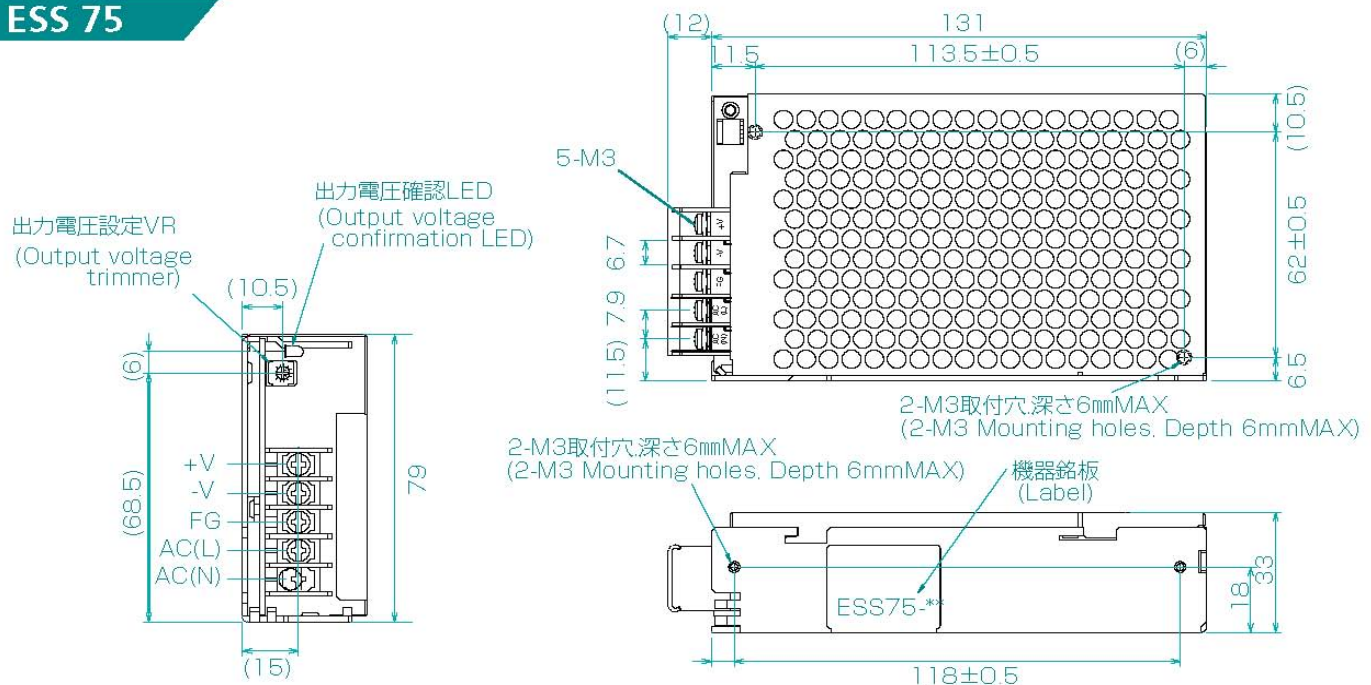


Mechanical drawing with “-J” connector




ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

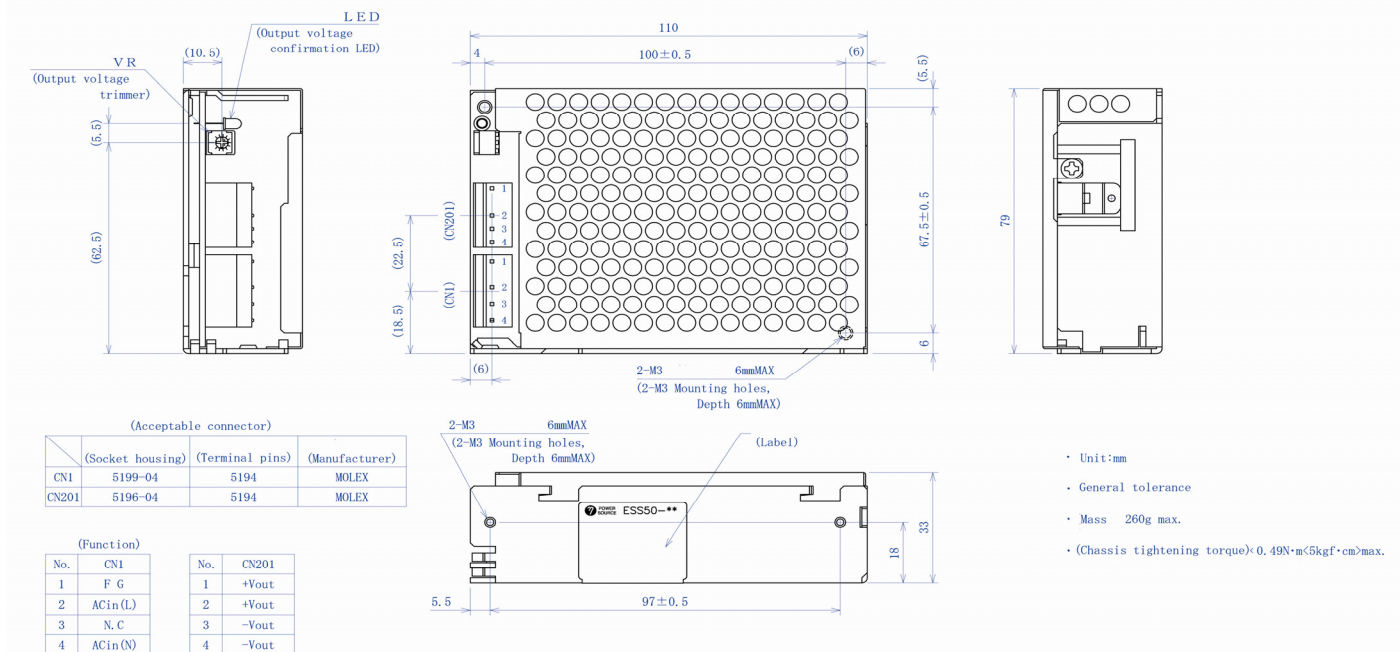

Block Diagram

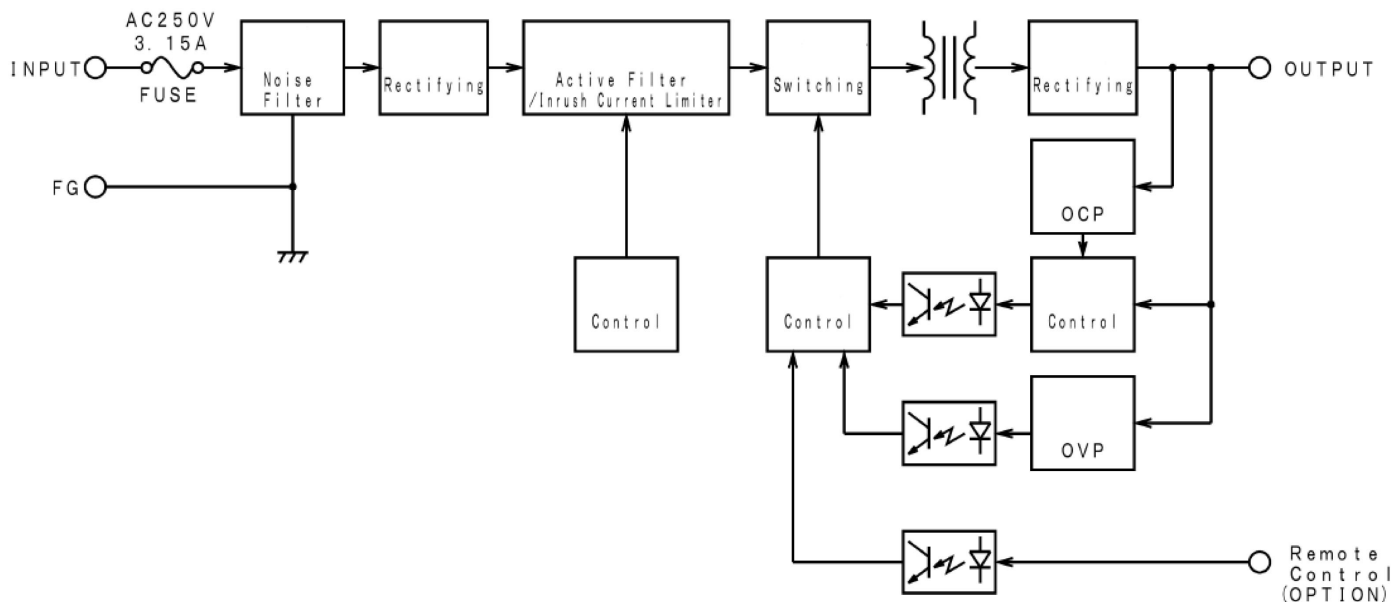

ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com
email at: sales@eta-usa.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ETA-USA:](#)

[ESS75-12](#) [ESS75-15](#) [ESS75-3.3](#) [ESS75-48](#) [ESS75-05](#) [ESS75-36](#) [ESS75-24](#) [ESS75-15-J](#) [ESS75-36-J](#) [ESS75-48-J](#) [ESS75-12-J](#) [ESS75-24-J](#)