



FHF-SX

300W Open Frame



FEATURES

- Compatibility type of PIN in the power supply unit market
- Realized wide range input(Ultra wide input)
- **Isolated Power Supply**



MODEL/CHANNEL		Unit	FHF3.3SX-U-1	FHF05SX-U-1	FHF06SX-U-1	FHF12SX-U-1	FHF15SX-U-1
OUTPUT	Voltage	V	3.3	5	6	12	15
	Current	A	60	60	50	27	22
	Efficiency	%	67	72	73	75	76
MODEL/CHANNEL		Unit	FHF24SX-U-1	FHF30SX-U-1	FHF36SX-U-1	FHF48SX-U-1	
OUTPUT	Voltage	V	24	30	36	48	
	Current	A	14	11	9	7	
	Efficiency	%	78	78	78	80	
	Load Regulation max.	mV	1%MAX				
	Hold Up Time	mS	60mS Typ				
	Rise Up Time	mS	500mS/200mS(Input 115V/230VAC)				
	Drift	mV	(Output V X 0.5%)+15mV/8H (After 1 H)				
	Ripple and Noise(max.)	mVp	(Output V x 1%)+100mVp-p MAX(1)				
	Temperature Coefficient	-	0.03% / °C(-5~50°C)				
MODEL/CHANNEL		Unit					
INPUT	Full Load	mA	6.5A/3.5A(Input 115VAC/230VAC)				
	Inrush Current	Vac	12A/24A MAX(Input115VAC/230VAC)				
	Input Voltage	Vac	± 10%, (+10,-20%)(FHF3.3SX only)				
	Voltage Nominal	V	AC115~230V (Wide range)				
	Frequency	Hz	50/60Hz				
	Power Factor and Harmonic	-	85~255VAC				
	Phase	%	Single				
	Input Voltage Range	Vdc	85~264VAC				



	MODEL/CHANNEL	Unit	
Environment	Operating Temperature	°C	-5 ~+50°C (2)
	Leakage Current	mA	1mAMAX(Input 115VAC/230VAC)
	Operating Humidity	%	(5~10Hz) Amplitude (peak to peak)
	Storage Temperature	°C	10~85%
	Withstanding Voltage	-	130KHz
	Input-Output	-	AC3000V(1Minute)
	Input-Chassis	-	AC2500V
	Output-Chassis	-	AC 500V (1Minute)
	Switching Frequency	-	Possible
	Shock	-	30G (3)
	Remote Control Sensing	-	Possible
	Vibration	-	10mm(constant) (10~55Hz) Acceleraton 2G (3)
Function	Overvoltage Protection	-	Automatic reset
	Overcurrent Protection	-	Output shutdown
	Input Fuse	-	Active filter circuit with booster
	Insulation Resistance	-	(Input-Output-Chassis): 50M MIN.
	Remote Control	-	Output normal by short or L (0~0.4V) Output shutdown by open or H (1~6V) Input current shall be less than 0.1 (A) while
	Remote Sensing	-	Remove attached ± short piece and connect with load by using twist pair wire. While doing above, voltage drop shall be less than 0.3V (one line 0.15V).
Dimension	Size(LxWxH)/Weight	mm/g	120x190x93/1900g(FHF-SX)




ETA-USA

The Power Professionals

Derating Diagram


300W

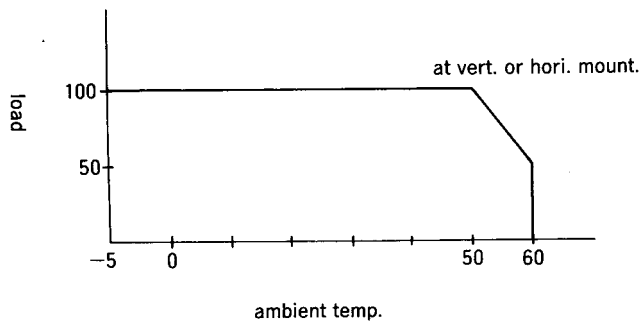

for further information contact safety approvals.

OCP Curves

300W

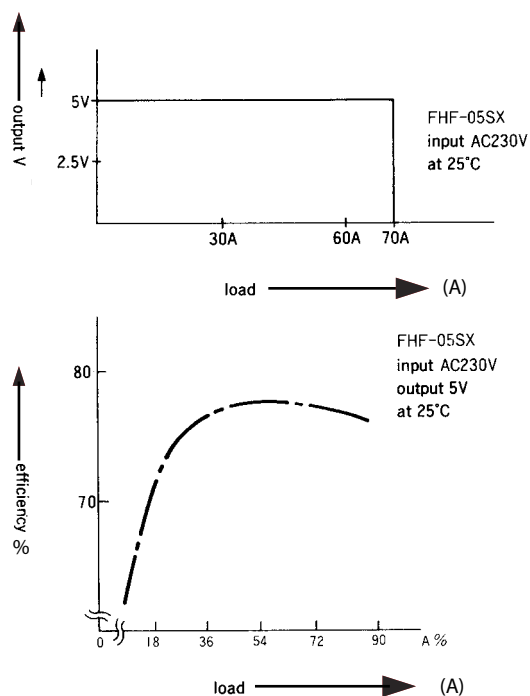

ETA-USA


16170 Vineyard Blvd. Suite 180 Morgan Hill, CA 95037 <http://www.eta-usa.com>
Toll-free (US only): 800-ETA-POWR (800-382-7697) Telephone: 408 778-2793 FAX: 408-779-2753



ETA-USA
The Power Professionals

Diagram

300W

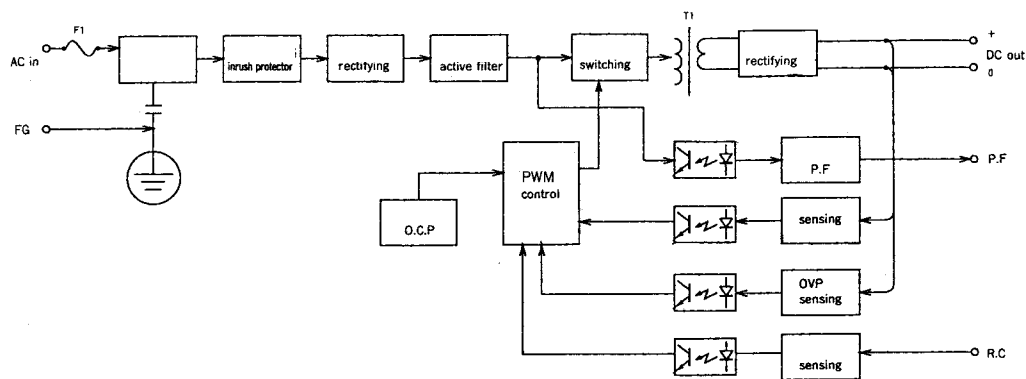

ETA-USA

16170 Vineyard Blvd. Suite 180 Morgan Hill, CA 95037 <http://www.eta-usa.com>
Toll-free (US only): 800-ETA-POWR (800-382-7697) Telephone: 408 778-2793 FAX: 408-779-2753

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ETA-USA:](#)

[FHF30SX-U](#) [FHF06SX-U](#) [FHF3.3SX-U](#) [FHF36SX-U](#) [FHF48SX-U](#) [FHF12SX-U](#) [FHF24SX-U](#) [FHF05SX-U](#)
[FHF15SX-U](#)