


VTB-SC/VTB-SD

50W



FEATURES

- Variety of Models
- Chassis mount type
- Compact and High Efficiency
- Isolated Power Supply



MODEL/CHANNEL		Unit	VTB05-SC24	VTB12-SC24	VTB15-SC24	VTB24-SC24	VTB48-SC24
OUTPUT (Single)	Output Current 24VDC	Vdc	5	12	15	24	48
	Output Current	A	10	4.3	3.4	2.5	1
MODEL/CHANNEL		Unit	VTB05-SC48	VTB12-SC48	VTB15-SC48	VTB24-SC48	VTB48-SC48
OUTPUT (Single)	Output Current 48VDC	Vdc	5	12	15	24	48
	Output Current	A	10	4.3	3.4	2.5	1
MODEL/CHANNEL		Unit	VTB05-SD1	VTB12-SD1	VTB15-SD1	VTB24-SD1	VTB48-SD1
OUTPUT (Single)	Output Current 110VDC	Vdc	5	12	15	24	48
	Output Current	A	10	4.3	3.4	2.5	1
MODEL/CHANNEL		Unit	VTB05-SC12	VTB12-SC12	VTB15-SC12	VTB24-SC12	VTB48-SC12
OUTPUT (Single)	Output Voltage	Vdc	5	12	15	24	48
	Output Current 12VDC	A	8	3.3	2.7	1.7	0.8
	Line Regulation	mV	40	96	120	192	384
	Load Regulation	mVp	45	108	135	216	432
	Ripple and Noise	mVp	100	170	200	290	530
	Voltage Adjustment Range	-	+/-10% of Rated Output Voltage(at no load within input range)				
	Rise Time	-	100mS(maximum) at 25°C and rated input/output				
	Temp. Coefficient	°C	0.03%/°C				
	Drift	mV	40	75	90	135	255
	Dynamic Load Regulation	mV	150	360	450	720	1440
	Recovery Time	mS	0.5mS				
MODEL/CHANNEL		Unit	VTB05-SC12	VTB12-SC12	VTB15-SC12	VTB24-SC12	VTB48-SC12
INPUT	Input Voltage 12V	Vdc	DC 12V				
	Input Voltage Range	Vdc	DC 9.2V-16V				
	Input Current	A	4.63	4.58	4.69	4.42	4.05
	Efficiency	%	72	75	76	77	78
	Ref. MTB	H	820,000				
	Switching Frequency	kHz	60 Fix.				

VTB-SC/VTB-SD

50W

MODEL/CHANNEL		Unit	VTB05-SC24	VTB12-SC24	VTB15-SC24	VTB24-SC24	VTB48-SC24
	Input Voltage 24V	Vdc	DC 24V				
	Input Voltage Range	Vdc	DC 19-32V				
	Input Current	A	2.67	2.69	2.59	3.09	2.53
	Efficiency	%	78	80	82	81	79
	Ref. MTBF	H	810,000				
	Switching Frequency	kHz	60 Fix.				
MODEL/CHANNEL		Unit	VTB05-SC48	VTB12-SC48	VTB15-SC48	VTB24-SC48	VTB48-SC48
	Input Voltage 48V	Vdc	DC 48V				
	Input Voltage Range	Vdc	DC 38-63V				
	Input Current	A	1.34	1.31	1.28	1.44	1.16
	Efficiency	%	78	82	83	84	86
	Ref. MTBF	H	810,000				
	Switching Frequency	kHz	60 Fix.				
MODEL/CHANNEL		Unit	VTB05-SD1	VTB12-SD1	VTB15-SD1	VTB24-SD1	VTB48-SD1
	Input Voltage 110V	Vdc	DC 110V				
	Input Voltage Range	Vdc	DC 85-140V				
	Input Current	A	5.27	5.31	5.12	5.59	4.71
	Efficiency	%	79	81	83	84	85
	Ref. MTBF	H	740,000				
	Switching Frequency	kHz	70 Fix.				
MODEL/CHANNEL		Unit					
Environment	Operating Temperature	°C	0 to +50°C				
	Operating Humidity	%	85%RH(non-condensing)				
	Storage Temperature	°C	-20 to +85°C				
	Withstand Voltage Primary-Secondary	%	Primary-Secondary AC1,500V for 1 minute (Vin=110 2000) Primary-Frame Ground AC1,500V for 1 minute (Vin=110 2000) Secondary-Frame Ground AC500V for 1 minute				
	Storage Humidity	-	20 to +90%RH				
	Isolation Resistance	-	Primary-Secondary-Frame Ground 50M (minimum) by DC500V insulation tester				
	Shock	-	294m/s ²				
	Cooling	-	Convection				
	Vibration	-	5-10Hz: 10mm double amplitude, 10-55Hz: 19.6m/s ² , 20 minutes period for 60 minutes each along X, Y, Z axis(non-operating)				
Protection	Over Current Protection	A	Current Limiting with automatic recovery				
	Over Voltage Protection	-	Output shutdown				
	Reverse Voltage Protection	-	by internal bridge diode				
Dimension	Size(WxHxD) / Weight	mm/g	96W×160L×33H/410g				

* Input fuse is installed in unit

* Common mode filter is installed at the input side of unit




ETA-USA

The Power Professionals


Block Diagram

50W

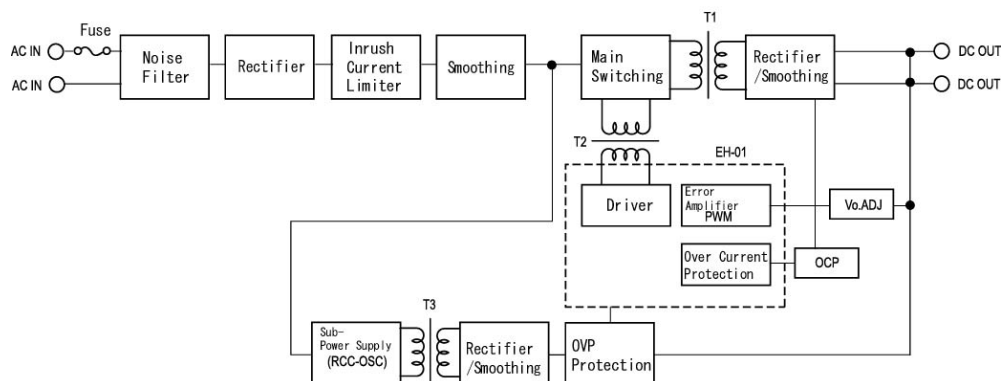


Dimension Diagram


(mm)

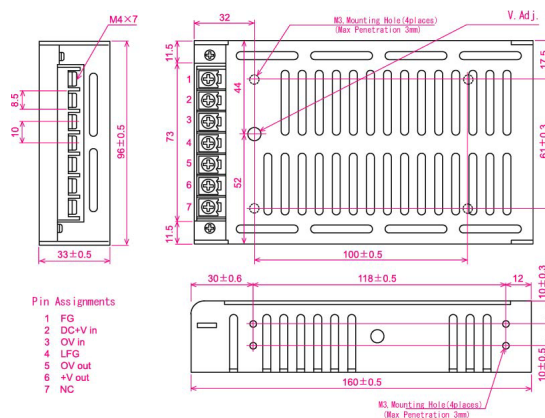

Efficiency Curve

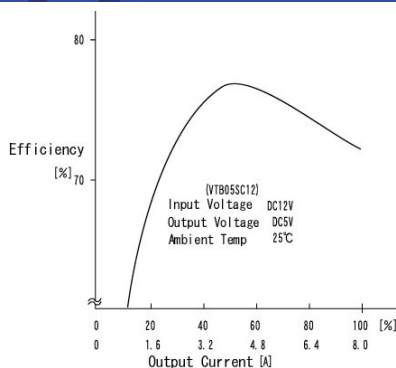

OCP Curve

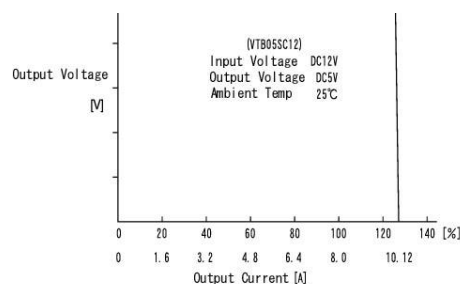

ETA-USA

3170 Vineyard Blvd. Suite 180 Morgan Hill, CA 95037 <http://www.eta-usa.com>
Toll-free (US only): 800-ETA-POWR (800-382-7697) Telephone: 408 778-2793 FAX: 408-779-2753

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ETA-USA:

[VTB48SC48](#) [VTB48SC24](#) [VTB24SC12](#) [VTB24SC48](#) [VTB05SC48](#) [VTB15SC12](#) [VTB12SD](#) [VTB24SD](#) [VTB15SC48](#)
[VTB15SC24](#) [VTB15SD](#) [VTB05SD](#) [VTB05SC24](#) [VTB05SC12](#) [VTB48SC12](#) [VTB12SC12](#) [VTB48SD](#) [VTB24SC24](#)
[VTB12SC24](#) [VTB12SC48](#) [VTB24SC110-O](#) [VTB05SC110-O](#) [VTB12SC110-O](#) [VTB05SC12-O](#) [VTB05SC24-O](#)
[VTB05SC48-O](#) [VTB12SC12-O](#) [VTB12SC24-O](#) [VTB12SC48-O](#) [VTB24SC12-O](#) [VTB24SC24-O](#) [VTB24SC48-O](#)