SIEMENS

Data sheet 3RF2390-1BA06

	Solid-state contactor 1-phase 3RF2 AC 15 / 30 A / 40 °C 48-600 V / 24 V DC Instantaneous switching Phased-out product, no successor available!
product brand name	SIRIUS
product designation	solid-state contactor
product type designation	3RF23
manufacturer's article number	
 _1 of the accessories that can be ordered 	3RF2900-3PA88
 _2 of the accessories that can be ordered 	3RF2950-0HA16
3 of the accessories that can be ordered	3RF2900-0EA18
 _4 of the accessories that can be ordered 	3RF2950-0GA16
product designation	<u> </u>
 _1 of the accessories that can be ordered 	terminal cover
 _2 of the accessories that can be ordered 	power regulator
• _3 of the accessories that can be ordered	converter
• _4 of the accessories that can be ordered	load monitoring
General technical data	load mornioring
product function	instantaneous switching
power loss [W] for rated value of the current	
at AC in hot operating state	117 W
at AC in hot operating state at AC in hot operating state per pole	117 W
without load current share typical	0.4 W
insulation voltage rated value	600 V
degree of pollution	3
type of voltage of the control supply voltage	DC
surge voltage resistance of main circuit rated value	6 kV
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
	29 Q
reference code according to EN 61346-2 reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/28/2009
Main circuit	03/20/2003
	1
number of poles for main current circuit number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
	0
operating voltage at AC	49 600 V
 at 50 Hz rated value at 60 Hz rated value 	48 600 V 48 600 V
operating frequency rated value	50 60 Hz
operating requesty rated value operating range relative to the operating voltage at AC	30 00 112
at 50 Hz	40 660 V
• at 60 Hz	40 660 V
operational current	40 000 V
at AC-51 rated value	50 A
• at AC-51 rated value • at AC-51 according to IEC 60947-4-3	50 A
<u> </u>	30 A
according to UL 508 rated value operational current minimum	500 MA
rate of voltage rise at the thyristor for main contacts	1 000 V/µs
maximum permissible	·
blocking voltage at the thyristor for main contacts maximum permissible	1 600 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	1 150 A

194 value mavimum	6 600 42 0
I2t value maximum	6 600 A ² ·s
Control circuit/ Control	20
type of voltage of the control supply voltage	DC
control supply voltage 1	
at DC rated value	30 V
• at DC	15 24 V
control supply voltage	
 at DC initial value for signal <1> detection 	15 V
at DC full-scale value for signal<0> recognition	5 V
control current at minimum control supply voltage	
• at DC	13 mA
control current at DC rated value	15 mA
ON-delay time	1 ms
OFF-delay time	1 ms; additionally max. one half-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
fastening method	screw fixing
side-by-side mounting	Yes
design of the thread of the screw for securing the	M4
equipment	
height	200 mm
width	180 mm
depth	163 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	·
• for main contacts	
— solid	2x (1.5 2.5 mm²), 2x (2.5 6 mm²)
finely stranded with core end processing	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
for AWG cables for main contacts	2x (14 10)
connectable conductor cross-section for main contacts	ZX (11 10)
solid or stranded	1.5 6 mm²
finely stranded with core end processing	1 10 mm²
type of connectable conductor cross-sections	1 10 mm
for auxiliary and control contacts	
— solid	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
— solid — finely stranded with core end processing	1x (0.5 2.5 mill-), 2x (0.5 1.0 mill-) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
— finely stranded without core end processing	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
for AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for	1x (AWG 20 12)
AWG number as coded connectable conductor cross section for main contacts	10 14
tightening torque	
for main contacts with screw-type terminals	2 2.5 N·m
for auxiliary and control contacts with screw-type	0.5 0.6 N·m
terminals	
tightening torque [lbf·in]	
• for main contacts with screw-type terminals	18 22 lbf·in
for auxiliary and control contacts with screw-type	4.5 5.3 lbf-in
terminals	
design of the thread of the connection screw	
• for main contacts	M4
of the auxiliary and control contacts	M3
stripped length of the cable	
• for main contacts	7 mm
 for auxiliary and control contacts 	7 mm
Safety related data	
protection class IP on the front according to IEC 60529	IP20

touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Ambient conditions	
installation altitude at height above sea level maximum	1 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
Electromagnetic compatibility	
conducted interference	
 due to burst according to IEC 61000-4-4 	2 kV / 5 kHz behavior criterion 2
 due to conductor-earth surge according to IEC 61000-4-5 	2 kV behavior criterion 2
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV behavior criterion 2
 due to high-frequency radiation according to IEC 61000- 4-6 	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1
field-based interference according to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, behavior criterion 1
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
conducted HF interference emissions according to CISPR11	Class A for industrial environment
field-bound HF interference emission according to CISPR11	Class B for the domestic, business and commercial environments
Short-circuit protection, design of the fuse link	
manufacturer's article number	
 of full range R fuse link for semiconductor protection at NH design usable 	3NE1020-2: These fuses have a smaller rated current than the semiconductor relays
 of back-up R fuse link for semiconductor protection at NH design usable 	<u>3NE8021-1</u>
 of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable 	3NC2280: These fuses have a smaller rated current than the semiconductor relays
Certificates/ approvals	

General Product Approval

EMC

Declaration of Conformity



Confirmation









Declaration of Conformity

Test Certificates

other

Railway



Type Test Certificates/Test Report

Special Test Certificate

Confirmation



Vibration and Shock

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2390-1BA06

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2390-1BA06

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$

https://support.industry.siemens.com/cs/ww/en/ps/3RF2390-1BA06

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2390-1BA06&lang=en

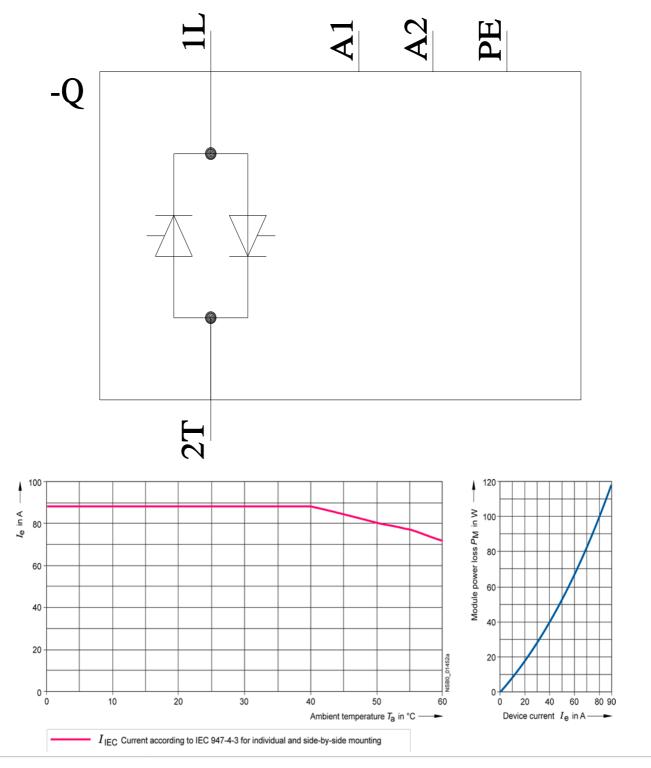

last modified: 1/12/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RF23901BA06