## SIEMENS

## Data sheet

## US2:17HUG82BH14



Non-reversing motor starter, Size 3, Three phase full voltage, Solid-state overload relay, OLR amp range 25-100A, Combination type, 100A fusible disconnect, 100A/250V fuse clip, Enclosure NEMA type 1, Indoor general purpose use, Extrawide enclosure

| product brand name  | Class 17  |
|---|---|
| design of the product   | Non-reversing motor starter with fusible disconnect |
| special product feature   | ESP200 overload relay                               |
| General technical data  |   |
| weight [lb]   | 81 lb   |
| Height x Width x Depth [in]   | 36 × 24 × 8 in                                      |
| touch protection against electrical shock                               | NA for enclosed products                            |
| installation altitude [ft] at height above sea level maximum            | 6560 ft   |
| ambient temperature [°F]  |   |
| during storage  | -22 +149 °F   |
| during operation  | -4 +104 °F  |
| ambient temperature   |   |
| during storage  | -30 +65 °C  |
| during operation  | -20 +40 °C  |
| country of origin   | USA   |
| Horsepower ratings  |   |
| yielded mechanical performance [hp] for 3-phase AC motor                |   |
| • at 200/208 V rated value  | 20 hp   |
| • at 220/230 V rated value  | 25 hp   |
| • at 460/480 V rated value  | 0 hp  |
| • at 575/600 V rated value  | 0 hp  |
| Contactor   |   |
| size of contactor   | NEMA controller size 3                              |
| number of NO contacts for main contacts                                 | 3   |
| operating voltage for main current circuit at AC at 60 Hz<br>maximum    | 600 V   |
| operational current at AC at 600 V rated value                          | 90 A  |
| mechanical service life (operating cycles) of the main contacts typical | 500000  |
| Auxiliary contact   |   |
| number of NC contacts at contactor for auxiliary contacts               | 0   |
| number of NO contacts at contactor for auxiliary contacts               | 1   |
| number of total auxiliary contacts maximum                              | 7   |
| contact rating of auxiliary contacts of contactor according to UL       | 10A@600VAC (A600), 5A@600VDC (P600)                 |
| Coil  |   |
| type of voltage of the control supply voltage                           | AC  |
| control supply voltage  |   |
| • at AC at 50 Hz rated value  | 380 440 V   |
| • at AC at 60 Hz rated value  | 440 480 V   |
| holding power at AC minimum   | 14 W  |
| apparent pick-up power of magnet coil at AC                             | 310 VA  |

| apparent holding nower of magnet coil at AC  | 26 VA  |
|--|--|
| apparent holding power of magnet coil at AC  | 26 VA<br>0.85 1.1  |
| operating range factor control supply voltage rated value of<br>magnet coil  | 0.05 1.1   |
| percental drop-out voltage of magnet coil related to the input voltage   | 50 %   |
| ON-delay time  | 26 41 ms   |
| OFF-delay time   | 14 19 ms   |
| Overload relay   |  |
| product function   |  |
| overload protection  | Yes  |
| phase failure detection  | Yes  |
| asymmetry detection  | Yes  |
| <ul> <li>ground fault detection</li> </ul>   | Yes  |
| test function  | Yes  |
| external reset   | Yes  |
| reset function   | Manual, automatic and remote   |
| trip class   | CLASS 5 / 10 / 20 (factory set) / 30   |
| adjustable current response value current of the current-<br>dependent overload release  | 25 100 A   |
| tripping time at phase-loss maximum  | 3 s  |
| relative repeat accuracy   | 1 %  |
| product feature protective coating on printed-circuit board  | Yes  |
| number of NC contacts of auxiliary contacts of overload relay  | 1  |
| number of NO contacts of auxiliary contacts of overload relay  | 1  |
| operational current of auxiliary contacts of overload relay  |  |
| • at AC at 600 V   | 5 A  |
| • at DC at 250 V   |  |
| contact rating of auxiliary contacts of overload relay according to UL   | 5A@600VAC (B600), 1A@250VDC (R300)   |
| insulation voltage (Ui)  |  |
| <ul> <li>with single-phase operation at AC rated value</li> </ul>  | 600 V  |
| <ul> <li>with multi-phase operation at AC rated value</li> </ul>   | 300 V  |
| · · ·  |  |
| Disconnect Switch  |  |
| Disconnect Switch response value of switch disconnector  | 100A / 250V  |
| Disconnect Switch<br>response value of switch disconnector<br>design of fuse holder  | 100A / 250V<br>Class R fuse clips  |
| Disconnect Switch response value of switch disconnector design of fuse holder operating class of the fuse link   | 100A / 250V  |
| Disconnect Switch response value of switch disconnector design of fuse holder operating class of the fuse link Enclosure   | 100A / 250V<br>Class R fuse clips<br>Class R   |
| Disconnect Switch response value of switch disconnector design of fuse holder operating class of the fuse link Enclosure design of the housing   | 100A / 250V<br>Class R fuse clips  |
| Disconnect Switch response value of switch disconnector design of fuse holder operating class of the fuse link Enclosure design of the housing Mounting/wiring   | 100A / 250V<br>Class R fuse clips<br>Class R<br>indoors, usable on a general basis   |
| Disconnect Switch response value of switch disconnector design of fuse holder operating class of the fuse link Enclosure design of the housing Mounting/wiring mounting position   | 100A / 250V<br>Class R fuse clips<br>Class R<br>indoors, usable on a general basis<br>vertical   |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method  | 100A / 250V<br>Class R fuse clips<br>Class R<br>indoors, usable on a general basis<br>vertical<br>Surface mounting and installation  |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method         type of electrical connection for supply voltage line-side   | 100A / 250V<br>Class R fuse clips<br>Class R<br>indoors, usable on a general basis<br>vertical<br>Surface mounting and installation<br>Box lug   |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method         type of electrical connection for supply voltage line-side         tightening torque [lbf-in] for supply   | 100A / 250V<br>Class R fuse clips<br>Class R<br>indoors, usable on a general basis<br>vertical<br>Surface mounting and installation<br>Box lug<br>120 120 lbf-in   |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method         type of electrical connection for supply voltage line-side   | 100A / 250V<br>Class R fuse clips<br>Class R<br>indoors, usable on a general basis<br>vertical<br>Surface mounting and installation<br>Box lug   |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method         type of electrical connection for supply voltage line-side         tightening torque [lbf-in] for supply         type of connectable conductor cross-sections at line-side for   | 100A / 250V<br>Class R fuse clips<br>Class R<br>indoors, usable on a general basis<br>vertical<br>Surface mounting and installation<br>Box lug<br>120 120 lbf-in   |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method         type of electrical connection for supply voltage line-side         tightening torque [lbf-in] for supply         type of connectable conductor cross-sections at line-side for         AWG cables single or multi-stranded   | 100A / 250V<br>Class R fuse clips<br>Class R<br>indoors, usable on a general basis<br>vertical<br>Surface mounting and installation<br>Box lug<br>120 120 lbf-in<br>1x (14 1/0 AWG)  |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method         type of electrical connection for supply voltage line-side         tightening torque [lbf-in] for supply         type of connectable conductor cross-sections at line-side for         AWG cables single or multi-stranded         temperature of the conductor for supply maximum permissible   | 100A / 250V<br>Class R fuse clips<br>Class R<br>indoors, usable on a general basis<br>vertical<br>Surface mounting and installation<br>Box lug<br>120 120 lbf-in<br>1x (14 1/0 AWG)<br>75 °C   |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method         type of electrical connection for supply voltage line-side         tightening torque [lbf-in] for supply         type of connectable conductor cross-sections at line-side for         AWG cables single or multi-stranded         temperature of the conductor for supply maximum permissible         material of the conductor for supply  | 100A / 250V<br>Class R fuse clips<br>Class R<br>indoors, usable on a general basis<br>vertical<br>Surface mounting and installation<br>Box lug<br>120 120 lbf-in<br>1x (14 1/0 AWG)<br>75 °C<br>AL or CU   |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method         type of electrical connection for supply voltage line-side         tightening torque [lbf-in] for supply         type of connectable conductor cross-sections at line-side for         AWG cables single or multi-stranded         temperature of the conductor for supply         type of electrical connection for supply maximum permissible  | 100A / 250V<br>Class R fuse clips<br>Class R<br>indoors, usable on a general basis<br>vertical<br>Surface mounting and installation<br>Box lug<br>120 120 lbf-in<br>1x (14 1/0 AWG)<br>75 °C<br>AL or CU<br>Box lug  |
| Disconnect Switch           response value of switch disconnector           design of fuse holder           operating class of the fuse link           Enclosure           design of the housing           Mounting/wiring           mounting position           fastening method           type of electrical connection for supply voltage line-side           tightening torque [lbf-in] for supply           type of connectable conductor cross-sections at line-side for           AWG cables single or multi-stranded           temperature of the conductor for supply maximum permissible           material of the conductor for supply           type of electrical connection for load-side outgoing feeder           tightening torque [lbf-in] for load-side outgoing feeder   | 100A / 250V<br>Class R fuse clips<br>Class R<br>indoors, usable on a general basis<br>vertical<br>Surface mounting and installation<br>Box lug<br>120 120 lbf-in<br>1x (14 1/0 AWG)<br>75 °C<br>AL or CU<br>Box lug<br>120 120 lbf-in  |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method         type of electrical connection for supply voltage line-side         tightening torque [lbf-in] for supply         type of connectable conductor cross-sections at line-side for         AWG cables single or multi-stranded         temperature of the conductor for supply maximum permissible         material of the conductor for supply         type of electrical connection for load-side outgoing feeder         tightening torque [lbf-in] for load-side outgoing feeder  | 100A / 250V<br>Class R fuse clips<br>Class R<br>indoors, usable on a general basis<br>vertical<br>Surface mounting and installation<br>Box lug<br>120 120 lbf-in<br>1x (14 1/0 AWG)<br>75 °C<br>AL or CU<br>Box lug<br>120 120 lbf-in<br>1x (14 2/0 AWG)   |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method         type of electrical connection for supply voltage line-side         tightening torque [lbf-in] for supply         type of connectable conductor cross-sections at line-side for         AWG cables single or multi-stranded         temperature of the conductor for supply maximum permissible         material of the conductor for supply         type of electrical connection for load-side outgoing feeder         tightening torque [lbf-in] for load-side outgoing feeder         type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded         temperature of the conductor for load-side outgoing feeder         type of connectable conductor for load-side outgoing feeder         type of connectable conductor for load-side outgoing feeder         type of connectable conductor for load-side outgoing feeder  | 100A / 250V<br>Class R fuse clips<br>Class R<br>indoors, usable on a general basis<br>vertical<br>Surface mounting and installation<br>Box lug<br>120 120 lbf-in<br>1x (14 1/0 AWG)<br>75 °C<br>AL or CU<br>Box lug<br>120 120 lbf-in<br>1x (14 2/0 AWG)<br>75 °C  |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method         type of electrical connection for supply voltage line-side         tightening torque [lbf-in] for supply         type of connectable conductor cross-sections at line-side for         AWG cables single or multi-stranded         temperature of the conductor for supply maximum permissible         material of the conductor for supply         type of electrical connection for load-side outgoing feeder         tightening torque [lbf-in] for load-side outgoing feeder         type of electrical connection for load-side outgoing feeder         type of connectable conductor cross-sections for AWG cables         for load-side outgoing feeder         type of connectable conductor for supply         type of connectable conductor for load-side outgoing feeder         type of connectable conductor for load-side outgoing feeder         type of connectable conductor for load-side outgoing feeder         maximum permissible         material of the conductor for load-side outgoing feeder         maximum permissible         material of the conductor f  | 100A / 250V         Class R fuse clips         Class R         indoors, usable on a general basis         vertical         Surface mounting and installation         Box lug         120 120 lbf-in         1x (14 1/0 AWG)         75 °C         AL or CU         Box lug         120 120 lbf-in         1x (14 2/0 AWG)         75 °C         AL or CU         Box lug         1x (14 2/0 AWG)   |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method         type of electrical connection for supply voltage line-side         tightening torque [lbf-in] for supply         type of connectable conductor cross-sections at line-side for         AWG cables single or multi-stranded         temperature of the conductor for supply maximum permissible         material of the conductor for supply         type of electrical connection for load-side outgoing feeder         tightening torque [lbf-in] for load-side outgoing feeder         tightening torque [lbf-in] for load-side outgoing feeder         type of connectable conductor cross-sections for AWG cables         for load-side outgoing feeder single or multi-stranded         temperature of the conductor for load-side outgoing feeder         maximum permissible         material of the conductor for load-side outgoing feeder         type of electrical connection of magnet coil   | 100A / 250V         Class R fuse clips         Class R         indoors, usable on a general basis         vertical         Surface mounting and installation         Box lug         120 120 lbf-in         1x (14 1/0 AWG)         75 °C         AL or CU         Box lug         120 120 lbf-in         1x (14 2/0 AWG)         75 °C         AL or CU         Box lug         120 120 lbf-in         1x (14 2/0 AWG)         75 °C         AL or CU         Screw-type terminals  |
| Disconnect Switch           response value of switch disconnector           design of fuse holder           operating class of the fuse link           Enclosure           design of the housing           Mounting/wiring           mounting position           fastening method           type of electrical connection for supply voltage line-side           tightening torque [lbf-in] for supply           type of connectable conductor cross-sections at line-side for           AWG cables single or multi-stranded           temperature of the conductor for supply maximum permissible           material of the conductor for supply           type of electrical connection for load-side outgoing feeder           tightening torque [lbf-in] for load-side outgoing feeder           type of electrical connection for load-side outgoing feeder           type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder           type of connectable conductor for load-side outgoing feeder           type of electrical connection of magnet coil           tightening torque [lbf-in] at magnet coil           tightening torque [lbf-in] at magnet coil           tightening torque [lbf-in] at magnet coil  | 100A / 250V         Class R fuse clips         Class R         indoors, usable on a general basis         vertical         Surface mounting and installation         Box lug         120 120 lbf-in         1x (14 1/0 AWG)         75 °C         AL or CU         Box lug         120 120 lbf-in         1x (14 2/0 AWG)         75 °C         AL or CU         Box lug         120 120 lbf-in         1x (14 2/0 AWG)         75 °C         AL or CU         Screw-type terminals         5 12 lbf-in                        |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method         type of electrical connection for supply voltage line-side         tightening torque [lbf-in] for supply         type of connectable conductor cross-sections at line-side for         AWG cables single or multi-stranded         temperature of the conductor for supply maximum permissible         material of the conductor for supply         type of connectable conductor cross-sections for AWG cables         for load-side outgoing feeder         tightening torque [lbf-in] for load-side outgoing feeder         type of connectable conductor for supply         type of connectable conductor for supply         type of connectable conductor for load-side outgoing feeder         type of connectable conductor for load-side outgoing feeder         type of electrical connection of magnet coil         tightening torque [lbf-in] at magnet coil         tightening torque [lbf-in] at magnet coil         type of connectable conductor cross-sections of magnet coil for         AWG cables single or multi-stranded         temperature of the conductor cros  | 100A / 250V         Class R fuse clips         Class R         indoors, usable on a general basis         vertical         Surface mounting and installation         Box lug         120 120 lbf-in         1x (14 1/0 AWG)         75 °C         AL or CU         Box lug         120 120 lbf-in         1x (14 2/0 AWG)         75 °C         AL or CU         Box lug         120 120 lbf-in         1x (14 2/0 AWG)         75 °C         AL or CU         Screw-type terminals         5 12 lbf-in         2x (16 12 AWG) |
| Disconnect Switch         response value of switch disconnector         design of fuse holder         operating class of the fuse link         Enclosure         design of the housing         Mounting/wiring         mounting position         fastening method         type of electrical connection for supply voltage line-side         tightening torque [lbf-in] for supply         type of connectable conductor cross-sections at line-side for         AWG cables single or multi-stranded         temperature of the conductor for supply maximum permissible         material of the conductor for supply         type of electrical connection for load-side outgoing feeder         tightening torque [lbf-in] for load-side outgoing feeder         type of connectable conductor cross-sections for AWG cables         for load-side outgoing feeder single or multi-stranded         temperature of the conductor for load-side outgoing feeder         type of electrical connection of magnet coil         type of electrical connection of magnet coil         tightening torque [lbf-in] at magnet coil         type of connectable conductor cross-sections of magnet coil for         AWG cables single or multi-stranded         temperature of the conductor at magnet coil maximum         permissible   | 100A / 250V         Class R fuse clips         Class R         indoors, usable on a general basis         vertical         Surface mounting and installation         Box lug         120 120 lbf-in         1x (14 1/0 AWG)         75 °C         AL or CU         Box lug         120 120 lbf-in         1x (14 2/0 AWG)         75 °C         AL or CU         Screw-type terminals         5 12 lbf-in         2x (16 12 AWG)         75 °C   |
| Disconnect Switch           response value of switch disconnector           design of fuse holder           operating class of the fuse link           Enclosure           design of the housing           Mounting/wiring           mounting position           fastening method           type of electrical connection for supply voltage line-side           tightening torque [lbf-in] for supply           type of connectable conductor cross-sections at line-side for           AWG cables single or multi-stranded           temperature of the conductor for supply maximum permissible           material of the conductor for supply           type of electrical connection for load-side outgoing feeder           tightening torque [lbf-in] for load-side outgoing feeder           type of electrical connection for load-side outgoing feeder           type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder           type of the conductor for load-side outgoing feeder           type of electrical connection of magnet coil           tightening torque [lbf-in] at magnet coil           type of connectable conductor cross-sections of magnet coil for           AWG cables single or multi-stranded           temperature of the conductor for load-side outgoing feeder           type of connectable conductor cross-sections of magnet coil for | 100A / 250V         Class R fuse clips         Class R         indoors, usable on a general basis         vertical         Surface mounting and installation         Box lug         120 120 lbf in         1x (14 1/0 AWG)         75 °C         AL or CU         Box lug         120 120 lbf in         1x (14 2/0 AWG)         75 °C         AL or CU         Screw-type terminals         5 12 lbf in         2x (16 12 AWG)         75 °C         CU  |

|  | -   |
|--|---|
| type of connectable conductor cross-sections at contactor for AWG cables for auxiliary contacts single or multi-stranded         | 1x (12 AWG), 2x (16 14 AWG), 2x (18 16 AWG)         |
| temperature of the conductor at contactor for auxiliary contacts maximum permissible   | 75 °C   |
| material of the conductor at contactor for auxiliary contacts  | CU  |
| type of electrical connection at overload relay for auxiliary<br>contacts  | Screw-type terminals                                |
| tightening torque [lbf-in] at overload relay for auxiliary contacts  | 7 10 lbf·in   |
| type of connectable conductor cross-sections at overload relay<br>for AWG cables for auxiliary contacts single or multi-stranded | 2x (20 14 AWG)                                      |
| temperature of the conductor at overload relay for auxiliary<br>contacts maximum permissible                                     | 75 °C   |
| material of the conductor at overload relay for auxiliary contacts   | CU  |
| Short-circuit current rating   |   |
| design of the fuse link for short-circuit protection of the main<br>circuit required   | 10kA@600V (Class H or K); 100kA@600V (Class R or J) |
| certificate of suitability   | NEMA ICS 2; UL 508; CSA 22.2, No.14                 |
| Further information  |   |
| Industrial Controls - Product Overview (Catalogs, Brochures  |   |

Industrial Controls - Product Overview (Catalogs, Brochures,...) www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:17HUG82BH14


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/US/en/ps/US2:17HUG82BH14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=US2:17HUG82BH14&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:17HUG82BH14/certificate

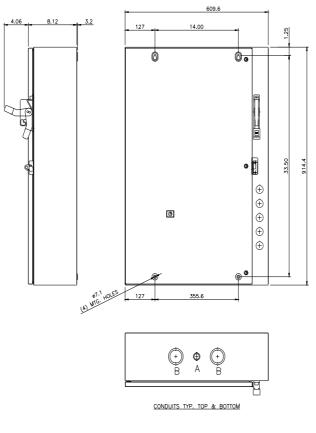

| LETTER | CONDUIT SIZE          |
|--------|-----------------------|
| A      | 012.7 & 019 CONDUIT   |
| B      | @31.8 & @38.1 CONDUIT |



D68782001

last modified:

1/25/2022 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 17HUG82BH14