SIEMENS

Data sheet

US2:26DUC92NC



Reversing motor starter, Size 1, Three phase full voltage, Solid-state overload relay, OLR amp range 3-12A, Combination type, 10A circuit breaker, Enclosure NEMA type 4/12, Water/dust tight for outdoors

product brand name	Class 18 & 26
design of the product	Full-voltage reversing motor starter with motor circuit protector
special product feature	ESP200 overload relay; Dual voltage coil
General technical data	
Height x Width x Depth [in]	24 × 20 × 8 in
touch protection against electrical shock	NA for enclosed products
installation altitude [ft] at height above sea level maximum	6560 ft
ambient temperature [°F]	
during storage	-22 +149 °F
during operation	-4 +104 °F
ambient temperature	
during storage	-30 +65 °C
during operation	-20 +40 °C
Horsepower ratings	
yielded mechanical performance [hp] for 3-phase AC motor	
• at 200/208 V rated value	2 hp
• at 220/230 V rated value	2 hp
• at 460/480 V rated value	5 hp
• at 575/600 V rated value	5 hp
Contactor	
size of contactor	NEMA controller size 1
number of NO contacts for main contacts	3
operating voltage for main current circuit at AC at 60 Hz maximum	600 V
operational current at AC at 600 V rated value	27 A
mechanical service life (operating cycles) of the main contacts typical	1000000
Auxiliary contact	
number of NC contacts at contactor for auxiliary contacts	2
number of NO contacts at contactor for auxiliary contacts	2
number of total auxiliary contacts maximum	8
contact rating of auxiliary contacts of contactor according to UL	10A@600VAC (A600), 5A@600VDC (P600)
Coil	
type of voltage of the control supply voltage	AC
control supply voltage	
• at AC at 60 Hz rated value	220 480 V
holding power at AC minimum	8.6 W
apparent pick-up power of magnet coil at AC	218 VA
apparent holding power of magnet coil at AC	25 VA
operating range factor control supply voltage rated value of magnet coil	0.85 1.1

percental drop-out voltage of magnet coil related to the input voltage	50 %
ON-delay time	19 29 ms
OFF-delay time	10 24 ms
Overload relay	
product function	
overload protection	Yes
phase failure detection	Yes
asymmetry detection	Yes
ground fault detection	Yes
test function	Yes
external reset	Yes
reset function	Manual, automatic and remote
trip class	CLASS 5 / 10 / 20 (factory set) / 30
adjustable current response value current of the current- dependent overload release	3 12 A
make time with automatic start after power failure maximum	3 s
relative repeat accuracy	1 %
product feature protective coating on printed-circuit board	Yes
number of NC contacts of auxiliary contacts of overload relay	1
number of NO contacts of auxiliary contacts of overload relay	1
operational current of auxiliary contacts of overload relay	
• at AC at 600 V	5 A
• at DC at 250 V	
contact rating of auxiliary contacts of overload relay according to UL	5A@600VAC (B600), 1A@250VDC (R300)
insulation voltage (Ui)	
with single-phase operation at AC rated value	600 V
with multi-phase operation at AC rated value	300 V
Enclosure	
	dustproof, waterproof & weatherproof
design of the housing	
Circuit Breaker	
Circuit Breaker type of the motor protection	Motor circuit protector (magnetic trip only)
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value	
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit	Motor circuit protector (magnetic trip only) 10 A
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring	Motor circuit protector (magnetic trip only) 10 A 30 100 A
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug 1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG)
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug 1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG) 75 °C
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug 1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG) 75 °C AL or CU
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug 1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG) 75 °C AL or CU Screw-type terminals
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug 1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf-in
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder temperature of the conductor for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug 1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf in 1x (14 2 AWG)
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder temperature of the conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection for load-side outgoing feeder type of electrical connection for load-side outgoing feeder type of load-side outgoing feeder type of electrical connection for load-side outgoing feeder type of	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug 1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals Screw-type terminals Screw-type terminals
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug 1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 35 32 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 35 32 lbf-in 1x (14 2 AWG)
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection for load-side outgoing feeder type of electrical connection for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug 1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf-in 1x (14 2 AWG)
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded temperature of the conductor at magnet coil maximum permissible	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug 1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf·in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf·in 2x (16 12 AWG) 75 °C
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder maximum permissible material of the conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor at magnet coil maximum permissible material of the conductor at magnet coil temperature of the conductor at magnet coil	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug 1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf·in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf·in 2x (16 12 AWG) 75 °C CU
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor at magnet coil maximum permissible material of the conductor at magnet coil type of electrical connection for auxiliary contacts	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug 1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf in 2x (16 12 AWG) 75 °C CU Screw-type terminals 5 12 lbf in 2x (16 12 AWG) 75 °C CU Screw-type terminals
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply maximum permissible material of the conductor for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor at magnet coil maximum permissible material of the conductor at magnet coil type of electrical connection for auxiliary contacts tightening torque [lbf-in] at contactor for auxiliary contacts tightening torque [lbf-in] at contactor for auxiliary contacts	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug 1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in 2x (16 12 AWG) 75 °C CU Screw-type terminals 10 15 lbf-in
Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor at magnet coil maximum permissible material of the conductor at magnet coil type of electrical connection for auxiliary contacts	Motor circuit protector (magnetic trip only) 10 A 30 100 A Vertical Surface mounting and installation Box lug 1x (14 AWG 10 AWG) or 1x (12 AWG 10 AWG) 75 °C AL or CU Screw-type terminals 35 35 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in 2x (16 12 AWG) 75 °C CU Screw-type terminals 5 12 lbf-in 2x (16 12 AWG) 75 °C CU Screw-type terminals

material of the conductor at contactor for auxiliary contacts	CU
type of electrical connection at overload relay for auxiliary contacts	Screw-type terminals
tightening torque [lbf·in] at overload relay for auxiliary contacts	7 10 lbf·in
type of connectable conductor cross-sections at overload relay for AWG cables for auxiliary contacts single or multi-stranded	2x (20 14 AWG)
temperature of the conductor at overload relay for auxiliary contacts maximum permissible	75 °C
material of the conductor at overload relay for auxiliary contacts	CU
Short-circuit current rating	
design of the short-circuit trip	Instantaneous trip circuit breaker
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	100 kA
• at 480 V	100 kA
● at 600 V	25 kA
certificate of suitability	NEMA ICS 2; UL 508; CSA 22.2, No.14
Further information	

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatal

Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:26DUC92NC


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/US/en/ps/US2:26DUC92NC

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:26DUC92NC&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:26DUC92NC/certificate

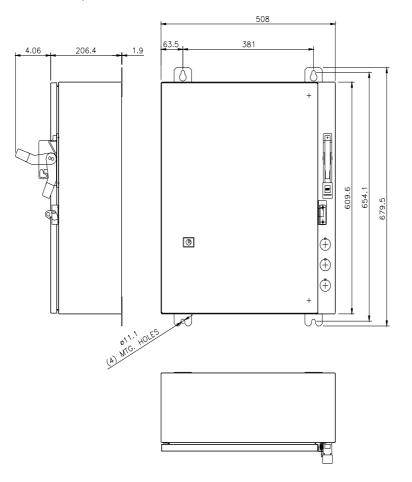

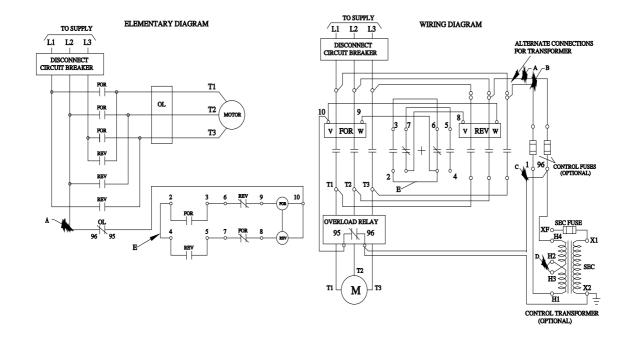

D68783001

last modified:

1/25/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 26DUC92NC