SIEMENS

Data sheet

US2:26FUF92BF



Reversing motor starter, Size 2, Three phase full voltage, Solid-state overload relay, OLR amp range 13-52A, 110V 50Hz / 120V 60Hz coil, Combination type, 50A circuit breaker, Enclosure NEMA type 1, Indoor general purpose use

product brand name	Class 18 & 26
design of the product	Full-voltage reversing motor starter with motor circuit protector
special product feature	ESP200 overload relay
General technical data	
Height x Width x Depth [in]	24 × 20 × 8 in
touch protection against electrical shock	NA for enclosed products
installation altitude [ft] at height above sea level maximum	6560 ft
ambient temperature [°F]	
during storage	-22 +149 °F
 during operation 	-4 +104 °F
ambient temperature	
 during storage 	-30 +65 °C
during operation	-20 +40 °C
Horsepower ratings	
yielded mechanical performance [hp] for 3-phase AC motor	
• at 200/208 V rated value	10 hp
• at 220/230 V rated value	15 hp
• at 460/480 V rated value	25 hp
• at 575/600 V rated value	25 hp
Contactor	
size of contactor	NEMA controller size 2
number of NO contacts for main contacts	3
operating voltage for main current circuit at AC at 60 Hz maximum	600 V
operational current at AC at 600 V rated value	45 A
mechanical service life (operating cycles) of the main contacts typical	1000000
Auxiliary contact	
number of NC contacts at contactor for auxiliary contacts	2
number of NO contacts at contactor for auxiliary contacts	2
number of total auxiliary contacts maximum	7
contact rating of auxiliary contacts of contactor according to UL	10A@600VAC (A600), 5A@600VDC (P600)
Coil	
type of voltage of the control supply voltage	AC
control supply voltage	
• at AC at 50 Hz rated value	110 V
• at AC at 60 Hz rated value	120 V
holding power at AC minimum	8.6 W
apparent pick-up power of magnet coil at AC	218 VA
apparent holding power of magnet coil at AC	25 VA
operating range factor control supply voltage rated value of	0.85 1.1

magnet coil	
percental drop-out voltage of magnet coil related to the input	50 %
voltage	
ON-delay time	19 29 ms
OFF-delay time	10 24 ms
Overload relay	
product function	
 overload protection 	Yes
 phase failure detection 	Yes
 asymmetry detection 	Yes
 ground fault detection 	Yes
test function	Yes
external reset	Yes
reset function	Manual, automatic and remote
trip class	CLASS 5 / 10 / 20 (factory set) / 30
adjustable current response value current of the current- dependent overload release	13 52 A
make time with automatic start after power failure maximum	3 s
relative repeat accuracy	1 %
product feature protective coating on printed-circuit board	Yes
number of NC contacts of auxiliary contacts of overload relay	1
number of NO contacts of auxiliary contacts of overload relay	1
operational current of auxiliary contacts of overload relay	
• at AC at 600 V	5 A
• at DC at 250 V	
contact rating of auxiliary contacts of overload relay according to UL	5A@600VAC (B600), 1A@250VDC (R300)
insulation voltage (Ui)	
• with single-phase operation at AC rated value	600 V
with multi-phase operation at AC rated value	300 V
Enclosure	
design of the housing	indoors, usable on a general basis
design of the housing Circuit Breaker	
design of the housing Circuit Breaker type of the motor protection	Motor circuit protector (magnetic trip only)
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value	Motor circuit protector (magnetic trip only) 50 A
design of the housing Circuit Breaker type of the motor protection	Motor circuit protector (magnetic trip only)
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous	Motor circuit protector (magnetic trip only) 50 A
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit	Motor circuit protector (magnetic trip only) 50 A
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring	Motor circuit protector (magnetic trip only) 50 A 180 600 A
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG)
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for supply	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf in 1x (14 2 AWG)
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder tughtening torque [lbf-in] for load-side outgoing feeder tughtening torque or tugoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder tughtening torque of the conductor for load-side outgoing feeder tughtening torque feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder tughtening torque feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder maximum permissible<	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder tightening torque of the conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection of magnet coil	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Box lug 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection for load-side outgoing feeder type of elect	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder tightening torque of the conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection of magnet coil temperature of the conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor cross-sections of magnet coil for	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Box lug 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of electrical connection for load-side outgoing feeder type of electrical connection of magnet coil type of electrical connection of magnet coil <td>Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in 2x (16 12 AWG)</td>	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in 2x (16 12 AWG)
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded temperature of the conductor at magnet coil maximum type of connectable conductor at m	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf·ln 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf·ln 2x (16 12 AWG) 75 °C
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor at magnet coil maximum permissible material of the conductor at magnet coil	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in 2x (16 12 AWG) 75 °C CU

temperature of the conductor at contactor for auxiliary contacts maximum permissible	75 °C
material of the conductor at contactor for auxiliary contacts	CU
type of electrical connection at overload relay for auxiliary contacts	Screw-type terminals
tightening torque [lbf-in] at overload relay for auxiliary contacts	7 10 lbf·in
type of connectable conductor cross-sections at overload relay for AWG cables for auxiliary contacts single or multi-stranded	2x (20 14 AWG)
temperature of the conductor at overload relay for auxiliary contacts maximum permissible	75 °C
material of the conductor at overload relay for auxiliary contacts	CU
Short-circuit current rating	
design of the short-circuit trip	Instantaneous trip circuit breaker
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	100 kA
• at 480 V	100 kA
• at 600 V	25 kA
certificate of suitability	NEMA ICS 2; UL 508; CSA 22.2, No.14
Further information	

Further Information

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:26FUF92BF


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/US/en/ps/US2:26FUF92BF


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:26FUF92BF&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:26FUF92BF/certificate

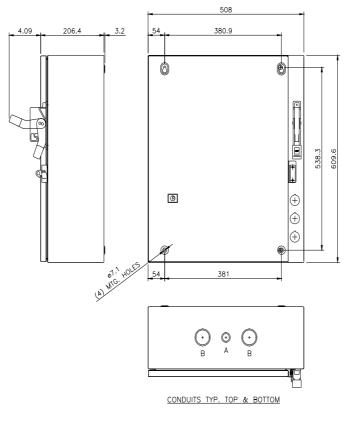

LETTER	CONDUIT SIZE
A	ø12.7 & ø19 CONDUIT
B	ø31.8 & ø38.1 CONDUIT

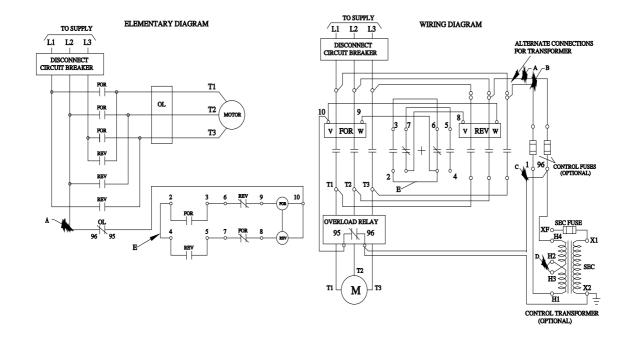

D68783001

last modified:

1/25/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 26FUF92BF