SIEMENS

Data sheet

US2:26FUF92BL



Reversing motor starter, Size 2, Three phase full voltage, Solid-state overload relay, OLR amp range 13-52A, 240V 50Hz / 277V 60Hz coil, Combination type, 50A circuit breaker, Enclosure NEMA type 1, Indoor general purpose use

product brand name	Class 18 & 26	
design of the product	Full-voltage reversing motor starter with motor circuit protector	
special product feature	ESP200 overload relay	
General technical data		
Height x Width x Depth [in]	24 × 20 × 8 in	
touch protection against electrical shock	NA for enclosed products	
installation altitude [ft] at height above sea level maximum	6560 ft	
ambient temperature [°F]		
during storage	-22 +149 °F	
during operation	-4 +104 °F	
ambient temperature		
during storage	-30 +65 °C	
during operation	-20 +40 °C	
Horsepower ratings		
yielded mechanical performance [hp] for 3-phase AC motor		
• at 200/208 V rated value	10 hp	
• at 220/230 V rated value	15 hp	
• at 460/480 V rated value	25 hp	
• at 575/600 V rated value	25 hp	
Contactor		
size of contactor	NEMA controller size 2	
number of NO contacts for main contacts	3	
operating voltage for main current circuit at AC at 60 Hz maximum	600 V	
operational current at AC at 600 V rated value	45 A	
mechanical service life (operating cycles) of the main contacts typical	1000000	
Auxiliary contact		
number of NC contacts at contactor for auxiliary contacts	2	
number of NO contacts at contactor for auxiliary contacts	2	
number of total auxiliary contacts maximum	7	
contact rating of auxiliary contacts of contactor according to UL	10A@600VAC (A600), 5A@600VDC (P600)	
Coil		
type of voltage of the control supply voltage	AC	
control supply voltage		
• at AC at 50 Hz rated value	240 V	
• at AC at 60 Hz rated value	277 V	
holding power at AC minimum	8.6 W	
apparent pick-up power of magnet coil at AC	218 VA	
apparent holding power of magnet coil at AC	25 VA	
operating range factor control supply voltage rated value of	0.85 1.1	

magnet coil		
percental drop-out voltage of magnet coil related to the input	50 %	
voltage		
ON-delay time	19 29 ms	
OFF-delay time	10 24 ms	
Overload relay		
product function		
overload protection	Yes	
phase failure detection	Yes	
asymmetry detection	Yes	
ground fault detection	Yes	
test function	Yes	
external reset	Yes	
reset function	Manual, automatic and remote	
trip class	CLASS 5 / 10 / 20 (factory set) / 30	
adjustable current response value current of the current- dependent overload release	13 52 A	
make time with automatic start after power failure maximum	3 s	
relative repeat accuracy	1 %	
product feature protective coating on printed-circuit board	Yes	
number of NC contacts of auxiliary contacts of overload relay	1	
number of NO contacts of auxiliary contacts of overload relay	1	
operational current of auxiliary contacts of overload relay		
• at AC at 600 V	5 A	
• at DC at 250 V		
contact rating of auxiliary contacts of overload relay according to UL	5A@600VAC (B600), 1A@250VDC (R300)	
insulation voltage (Ui)		
 with single-phase operation at AC rated value 	600 V	
with multi-phase operation at AC rated value	300 V	
Engloquiza		
Enclosure		
design of the housing	indoors, usable on a general basis	
design of the housing Circuit Breaker		
design of the housing Circuit Breaker type of the motor protection	Motor circuit protector (magnetic trip only)	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value	Motor circuit protector (magnetic trip only) 50 A	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous	Motor circuit protector (magnetic trip only)	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value	Motor circuit protector (magnetic trip only) 50 A	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring	Motor circuit protector (magnetic trip only) 50 A 180 600 A	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit	Motor circuit protector (magnetic trip only) 50 A	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG)	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder tightening torque conductor cross-sections for AWG cables	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf·in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG)	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder tightening torque (lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder tightening torque of the conductor for load-side outgoing feeder	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder tughtening torque [lbf-in] for load-side outgoing feeder tughtening torque [lbf-in] for load-side outgoing feeder tupe of connectable conductor for load-side outgoing feeder tupe o	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded temperature of the conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of load-side outgoing feeder type of electrical connection for load-side outgoing feeder	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of electrical connection for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder tightening torque of the conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection of magnet coil temperature of the conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor cross-sections of magnet coil for	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil <td< td=""><td>Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in 2x (16 12 AWG)</td></td<>	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Box lug 45 45 lbf-in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf-in 2x (16 12 AWG)	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder tightening torque [lbf-in] for load-side outgoing feeder type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder type of electrical connection for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf-in] at magnet coil tightening torque [lbf-in] at magnet coil type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded temperature of the conductor at magnet coil maximum permissible </td <td>Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf·in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf·in 2x (16 12 AWG) 75 °C</td>	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf·in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf·in 2x (16 12 AWG) 75 °C	
design of the housing Circuit Breaker type of the motor protection operational current of motor circuit breaker rated value adjustable current response value current of instantaneous short-circuit trip unit Mounting/wiring mounting position fastening method type of electrical connection for supply voltage line-side type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded temperature of the conductor for supply maximum permissible material of the conductor for supply type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder tightening torque [lbf·in] for load-side outgoing feeder tightening torque [lbf·in] for load-side outgoing feeder type of electrical connection for load-side outgoing feeder type of electrical connection for load-side outgoing feeder type of connectable conductor for load-side outgoing feeder type of electrical connection of magnet coil tightening torque [lbf·in] at magnet coil type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded temperature of the conductor at magnet coil maximum permissible material of the co	Motor circuit protector (magnetic trip only) 50 A 180 600 A Vertical Surface mounting and installation Box lug 1x (10 AWG 1/0 AWG) 75 °C AL or CU Box lug 45 45 lbf in 1x (14 2 AWG) 75 °C AL or CU Screw-type terminals 5 12 lbf in 2x (16 12 AWG) 75 °C CU	

temperature of the conductor at contactor for auxiliary contacts maximum permissible	75 °C
material of the conductor at contactor for auxiliary contacts	CU
type of electrical connection at overload relay for auxiliary contacts	Screw-type terminals
tightening torque [lbf-in] at overload relay for auxiliary contacts	7 10 lbf·in
type of connectable conductor cross-sections at overload relay for AWG cables for auxiliary contacts single or multi-stranded	2x (20 14 AWG)
temperature of the conductor at overload relay for auxiliary contacts maximum permissible	75 °C
material of the conductor at overload relay for auxiliary contacts	CU
Short-circuit current rating	
design of the short-circuit trip	Instantaneous trip circuit breaker
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	100 kA
• at 480 V	100 kA
• at 600 V	25 kA
certificate of suitability	NEMA ICS 2; UL 508; CSA 22.2, No.14
Further information	

Further information

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:26FUF92BL


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/US/en/ps/US2:26FUF92BL


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:26FUF92BL&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:26FUF92BL/certificate

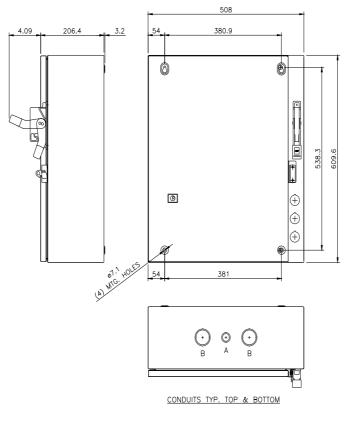

ETTER	CONDUIT SIZE
A	ø12.7 & ø19 CONDUIT
В	Ø31.8 & Ø38.1 CONDUIT

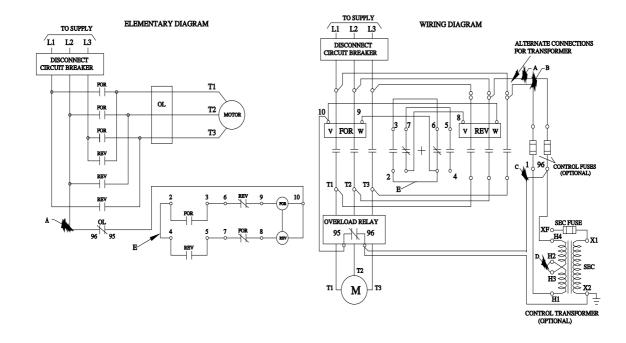

D68783001

last modified:

1/25/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 26FUF92BL