## **SIEMENS**

Data sheet 3LD2064-1TC51



SENTRON, Switch disconnector 3LD, main switch, 4-pole, 16 A, Operating power at AC- 23 A at 400 V: 7.5 kW, molded-plastic encapsulation for metric cable gland, rotary operating mechanism, black

Model	
product brand name	SENTRON
product designation	Switch disconnector
design of the product	Main switch
display version for switch position indicator manual operation	1 ON - 0 OFF
type of switch	Molded-plastic enclosure for metric threaded joint
design of the actuating element	Short rotary knob
color of the actuating element	black
design of handle	rotary operating mechanism, black
type of the driving mechanism motor drive	No
General technical data	
number of poles	4
number of poles note	PE
size of switch disconnector	1
mechanical service life (operating cycles) typical	100 000
electrical endurance (operating cycles)	
• at AC-23 A at 690 V	6 000
operating frequency maximum	50 1/h
degree of pollution	3
Voltage	
insulation voltage rated value	690 V
surge voltage resistance rated value	6 kV
operating voltage	
at AC rated value	690 V
operating frequency rated value	
• minimum	50 Hz
• maximum	60 Hz
Protection class	
protection class IP	IP65
degree of protection NEMA rating	1, 4X, 12
protection class IP on the front	IP65
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	0.5 W
Main circuit	
operational current	
• at AC-21 at 690 V rated value	16 A
• at AC-21 A at 240 V rated value	16 A
• at AC-21 A at 400 V rated value	16 A
• at AC-21 A at 440 V rated value	16 A

<ul> <li>at AC-23 A at 400 V rated value</li> </ul>	16 A
	10 A
operating power  ■ at AC-23 A at 240 V rated value	4 kW
at AC-23 A at 400 V rated value      at AC-23 A at 400 V rated value	8 kW
at AC-23 A at 400 V rated value      at AC-23 A at 440 V rated value	7.5 kW
at AC-23 A at 440 V rated value     at AC-23 A at 690 V rated value	7.5 KW 8 kW
at AC-25 A at 690 V rated value      at AC-3 at 240 V rated value	3 kW
at AC-3 at 400 V rated value      at AC-3 at 400 V rated value	6 kW
at AC-3 at 400 V rated value      at AC-3 at 690 V rated value	5.5 kW
Auxiliary circuit	5.5 KW
number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
operating voltage of auxiliary contacts at AC maximum	500 V
continuous current of the auxiliary contact rated value	10 A
insulation voltage of the auxiliary switch rated value	500 V
Suitability	300 V
suitability for use  • main switch	Yes
main switch     switch disconnector	Yes
switch disconnector     EMERGENCY OFF switch	Yes No
	No Yes
safety switch     maintenance/renair quitch	
maintenance/repair switch  Product details	Yes
	Yes
product feature can be locked into OFF position	tes
accessories	
product extension optional	No.
motor drive	No No
voltage trigger	No 2
number of connectable NC contacts for auxiliary contacts attachable maximum	3
number of connectable NO contacts for auxiliary contacts attachable maximum	5
number of connectable CO contacts for auxiliary contacts	0
attachable maximum	
	3
attachable maximum number of bracket locks maximum hasp thickness of the bracket locks	
attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit	3
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection	3 4 8 mm
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value	3
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch	3 4 8 mm
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum	3 4 8 mm 50 kA 3 kA
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum	3 4 8 mm 50 kA 3 kA 3 kA
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum	3 4 8 mm 50 kA 3 kA
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum	3 4 8 mm 50 kA 3 kA 3 kA
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  permissible	3 4 8 mm 50 kA 3 kA 3 kA
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  permissible  I2t value with closed switch	3 4 8 mm 50 kA 3 kA 3 kA 3 kA
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum	3 4 8 mm 50 kA 3 kA 3 kA 3 kA
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  permissible  I2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum	3 4 8 mm  50 kA  3 kA 3 kA 3 kA 2.5 kA2.s 2.5 kA2.s
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum	3 4 8 mm  50 kA  3 kA 3 kA 3 kA 2.5 kA2.s 2.5 kA2.s
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum	3 4 8 mm  50 kA 3 kA 3 kA 3 kA 2.5 kA2.s 2.5 kA2.s 3 kA2.s
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 490 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum	3 4 8 mm  50 kA 3 kA 3 kA 3 kA 2.5 kA2.s 2.5 kA2.s 1 kA2.s 3 kA2.s
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  design of the fuse link  • for short-circuit protection of the main circuit required  • for short-circuit protection of the auxiliary switch required	3 4 8 mm  50 kA  3 kA 3 kA 3 kA 3 kA 2.5 kA2.s 2.5 kA2.s 3 kA2.s  fuse gL/gG: 20 A fuse gL/gG: 10 A
attachable maximum  number of bracket locks maximum  hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  permissible  I2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  e at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  e at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  e at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690 V for combination switch + gG fuse maximum  o at 690	3 4 8 mm  50 kA  3 kA 3 kA 3 kA 3 kA 2.5 kA2.s 2.5 kA2.s 3 kA2.s  fuse gL/gG: 20 A fuse gL/gG: 10 A
attachable maximum number of bracket locks maximum hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum permissible  I2t value with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum design of the fuse link • for short-circuit protection of the main circuit required • for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value  according UL  operational current at AC according to UL 508/UL 60947-4-1	3 4 8 mm  50 kA  3 kA 3 kA 3 kA 2.5 kA2.s 2.5 kA2.s 2.5 kA2.s 4 fuse gL/gG: 20 A 5 fuse gL/gG: 10 A 20 A
attachable maximum number of bracket locks maximum hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum permissible  12t value with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum design of the fuse link • for short-circuit protection of the main circuit required • for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value  according UL  operational current at AC according to UL 508/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL	3 4 8 mm  50 kA  3 kA 3 kA 3 kA 2.5 kA2.s 2.5 kA2.s 2.5 kA2.s 4 fuse gL/gG: 20 A 5 fuse gL/gG: 10 A 20 A
attachable maximum number of bracket locks maximum hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection	3 4 8 mm  50 kA  3 kA 3 kA 3 kA 2.5 kA2.s 2.5 kA2.s 3 kA2.s  fuse gL/gG: 20 A fuse gL/gG: 10 A 20 A
number of bracket locks maximum hasp thickness of the bracket locks  Short circuit  conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum permissible  12t value with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum design of the fuse link • for short-circuit protection of the main circuit required • for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value  according UL  operational current at AC according to UL 508/UL 60947-4-1 rated value  operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value  active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value  active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value	3 4 8 mm  50 kA  3 kA 3 kA 3 kA 2.5 kA2.s 2.5 kA2.s 3 kA2.s  fuse gL/gG: 20 A fuse gL/gG: 10 A 20 A  16 A  600 V  7.5

508/UL 60947-4-1	
continuous current of upstream fuse according to UL rated value	50 A
type of fuse according to UL	RK5
Connections	Title
AWG number as coded connectable conductor cross section	
solid	
• maximum	10
• minimum	18
type of connectable conductor cross-sections for copper conductor	
• solid	1x (16mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	1x (14mm²)
• stranded	1x (16mm²)
type of connectable conductor cross-sections for auxiliary contacts	
• solid	lateral auxiliary switch 2x (0,75 2,5mm²), 1x 4mm²; front auxiliary switch 1x (0,75 2,5mm²)
finely stranded with core end processing	lateral auxiliary switch 2x (0,75 1,5mm²), 1x 2,5mm²; front auxiliary switch 1x 2,5mm²
stranded	lateral auxiliary switch 2x (0,75 2,5mm²), 1x 4mm²; front auxiliary switch 1x (0,75 2,5mm²)
type of electrical connection	
for main current circuit	box terminal
<ul> <li>for auxiliary contacts</li> </ul>	connection terminals
Mechanical Design	
height	152 mm
width	100 mm
depth	117 mm
type of device	fixed mounting
fastening method	Complete unit in enclosure
fastening method	
<ul> <li>4-hole front mounting</li> </ul>	No
<ul> <li>front mounting with central attachment</li> </ul>	Yes
rail mounting	No
net weight	449 g
Environmental conditions	
ambient temperature during operation	
• minimum	-25 °C
maximum	55 °C
ambient temperature during storage	
• minimum	-25 °C
maximum	55 °C
General Product Approval	



Confirmation







Miscellaneous

General Product Approval

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping

EAC

**( E** 



Miscellaneous

Special Test Certificate



other

Environment

Confirmation

Miscellaneous

Environmental Confirmations

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$ 

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

## Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

 $\underline{https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD2064-1TC51}$ 

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3LD2064-1TC51


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3LD2064-1TC51">http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3LD2064-1TC51</a>


CAx-Online-Generator

http://www.siemens.com/cax


**Tender specifications** 


http://www.siemens.com/specifications










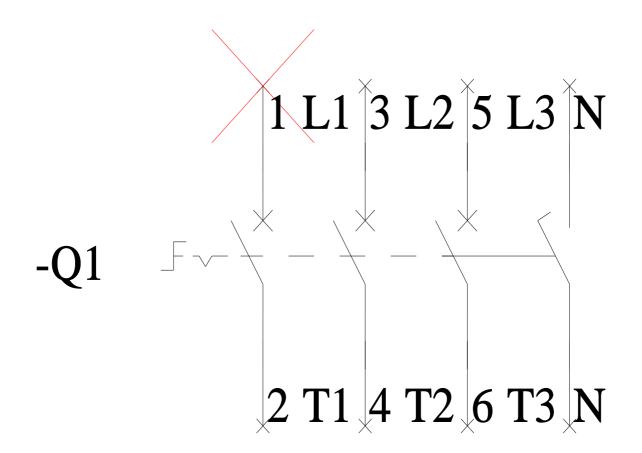

-CI

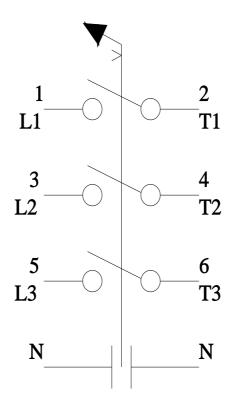

last modified:

6/20/2023

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3LD20641TC51