# SIEMENS

#### Data sheet

### 3LD2517-1TL13



SENTRON, switch disconnector 3LD, EMERGENCY OFF switch, 4-pole, lu: 63 A, Operating power / at AC-23 A at 400 V: 22 kW, floor mounting with door coupling, defeatable knob-operated mechanism, red/yellow, 4-hole mounting of the handle


SENTRON
Switch disconnector
EMERGENCY-STOP switch
1 ON - 0 OFF
Floor mounting with door coupling
selector switch
red
knob-operated mechanism, red/yellow
No
4
3
100 000
6 000
50 1/h
3
690 V
6 kV
690 V
50 Hz
60 Hz
IP65
1, 3R, 4X, 12
IP65
4.5 W
63 A
63 A
63 A
63 A
43 A


operating power	
at AC-23 A at 240 V rated value	11 kW
• at AC-23 A at 400 V rated value	22 kW
• at AC-23 A at 440 V rated value	22 kW
<ul> <li>at AC-23 A at 690 V rated value</li> </ul>	19 kW
<ul> <li>at AC-3 at 240 V rated value</li> </ul>	11 kW
<ul> <li>at AC-3 at 400 V rated value</li> </ul>	19 kW
• at AC-3 at 690 V rated value	15 kW
Auxiliary circuit	
number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
operating voltage of auxiliary contacts at AC maximum	500 V
continuous current of the auxiliary contact rated value	10 A
insulation voltage of the auxiliary switch rated value	500 V
Suitability	
suitability for use	
main switch	Yes
switch disconnector	Yes
EMERGENCY OFF switch	Yes
safety switch	Yes
<ul> <li>maintenance/repair switch</li> </ul>	Yes
Product details	
product feature can be locked into OFF position	Yes
accessories	
product extension optional	
motor drive	No
voltage trigger	No
number of connectable NC contacts for auxiliary contacts attachable maximum	3
number of connectable NO contacts for auxiliary contacts attachable maximum	5
number of connectable CO contacts for auxiliary contacts attachable maximum	0
number of bracket locks maximum	3
hasp thickness of the bracket locks	4 6 mm
Short circuit	
conditional short-circuit current with line-side fuse protection	
at 690 V by gG fuse rated value	50 kA
let-through current with closed switch	
at 240 V for combination switch + gG fuse maximum	6 kA
<ul> <li>at 240 V for combination switch + gG fuse maximum</li> <li>at 440 V for combination switch + gG fuse maximum</li> </ul>	6 KA
0	
at 690 V for combination switch + gG fuse maximum permissible	6 kA
I2t value with closed switch	
<ul> <li>at 240 V for combination switch + gG fuse maximum</li> </ul>	21 kA2.s
<ul> <li>at 440 V for combination switch + gG fuse maximum</li> </ul>	21 kA2.s
<ul> <li>at 690 V for combination switch + gG fuse maximum</li> </ul>	21 kA2.s
design of the fuse link	
<ul> <li>for short-circuit protection of the main circuit required</li> </ul>	fuse gL/gG: 63 A
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	fuse gL/gG: 10 A
operational current of upstream fuse rated value	63 A
according UL	
operational current at AC according to UL 508/UL 60947-4-1 rated value	63 A
operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value	600 V
active power [hp] at AC at 480 V according to UL 508/UL 60947- 4-1 rated value	40
active power [hp] at AC at 600 V according to UL 508/UL 60947- 4-1 rated value	50
short-time withstand current (SCCR) at 600 V according to UL 508/UL 60947-4-1	5 kA

continuous current of ur	ostream fuse according to UL rated value	175 /	4				
type of fuse according to		RK5					
Connections							
	connectable conductor cross section						
<ul> <li>maximum</li> </ul>		6	6				
• minimum			14				
type of connectable con conductor	ductor cross-sections for copper						
<ul> <li>solid</li> </ul>		1x (2	1x (2,535mm²)				
<ul> <li>finely stranded w</li> </ul>	ith core end processing	1x (2	516 mm²)				
• stranded			1x (2,535mm²)				
type of connectable conductor cross-sections for auxiliary contacts							
• solid			lateral auxiliary switch 2x (0,75 2,5mm <sup>2</sup> ), 1x 4mm <sup>2</sup> ; front auxiliary switch 1x (0,75 2,5mm <sup>2</sup> )				
<ul> <li>finely stranded w</li> </ul>	ith core end processing		lateral auxiliary switch 2x (0,75 1,5mm <sup>2</sup> ), 1x 2,5mm <sup>2</sup> ; front auxiliary switch 1x 2,5mm <sup>2</sup>				
<ul> <li>stranded</li> </ul>			lateral auxiliary switch 2x (0,75 2,5mm <sup>2</sup> ), 1x 4mm <sup>2</sup> ; front auxiliary switch 1x (0,75 2,5mm <sup>2</sup> )				
type of electrical connect	ction						
<ul> <li>for main current of</li> </ul>		box t	erminal				
<ul> <li>for auxiliary containing</li> </ul>	acts	conn	ection terminals				
Mechanical Design							
height		91 m	m				
width		_	84 mm				
depth			395 mm				
type of device		_	fixed mounting				
fastening method			in unit fixed-mounted vers	sion			
fastening method		Duit		51011			
4-hole front mour	ating	Yes					
	•	No					
-	front mounting with central attachment		Yes				
rail mounting     net weight		_	651 g				
Environmental condition	ne	001 5	3				
ambient temperature du	ining operation	25.8	25 °C				
• minimum			-25 °C				
maximum	ring storege	55 °C	,				
ambient temperature du	inng storage	25.9	<u>^</u>				
• minimum			-25 °C				
maximum	1	55 0	55 °C				
General Product Appr	oval						
	Confirmation Confirmation	)			<u>Miscellaneous</u>		
General Product Ap- proval	Declaration of Conformity		Test Certificates	Marine / Shipping	other		
EHC		E f.	Special Test Certific- ate	Lloyds Register us	Confirmation		
other	Environment						
Miscellaneous	Environmental Con- firmations						


#### Further information Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system) https:// all.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD2517-1TL13 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3LD2517-1TL13 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3LD2517-1TL13 CAx-Online-Generator http://www.siemens.com/cax **Tender specifications**

http://www.siemens.com/specifications

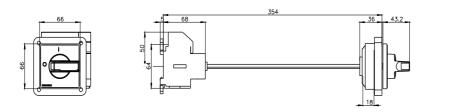






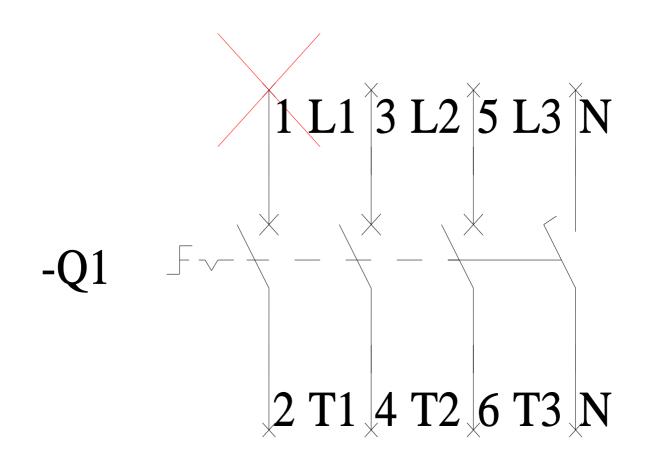

-CI

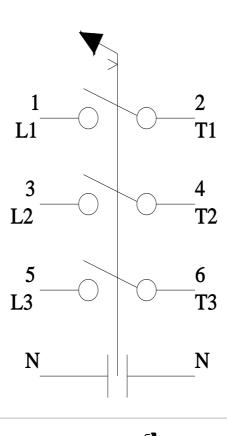

last modified:

6/20/2023 🖸

8/18/2023

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3LD25171TL13