# **SIEMENS**

Data sheet 3LD2530-0TK11



SENTRON, Switch disconnector 3LD, main switch, 3-pole, lu: 63 A, Operating power / at AC-23 A at 400 V: 22 kW, installation in distribution boards, knob-operated mechanism, black, handle direct at the switch

Model	
product brand name	SENTRON
product designation	Switch disconnector
design of the product	Main switch
display version for switch position indicator manual operation	1 ON - 0 OFF
type of switch	DIN-rail mounting
design of the actuating element	selector switch
color of the actuating element	black
design of handle	knob-operated mechanism, black
type of the driving mechanism motor drive	No
General technical data	
number of poles	3
size of switch disconnector	3
mechanical service life (operating cycles) typical	100 000
electrical endurance (operating cycles)	
• at AC-23 A at 690 V	6 000
operating frequency maximum	50 1/h
degree of pollution	3
Voltage	
insulation voltage rated value	690 V
surge voltage resistance rated value	6 kV
operating voltage	
at AC rated value	690 V
operating frequency rated value	
• minimum	50 Hz
• maximum	60 Hz
Protection class	
protection class IP	IP40
protection class IP on the front	IP40
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	4.5 W
Main circuit	
operational current	
• at AC-21 at 690 V rated value	63 A
• at AC-21 A at 240 V rated value	63 A
• at AC-21 A at 400 V rated value	63 A
• at AC-21 A at 440 V rated value	63 A
• at AC-23 A at 400 V rated value	43 A
operating power	

<ul> <li>at AC-23 A at 240 V rated value</li> </ul>	11 kW
<ul> <li>at AC-23 A at 400 V rated value</li> </ul>	22 kW
<ul> <li>at AC-23 A at 440 V rated value</li> </ul>	22 kW
<ul> <li>at AC-23 A at 690 V rated value</li> </ul>	19 kW
<ul> <li>at AC-3 at 240 V rated value</li> </ul>	11 kW
<ul> <li>at AC-3 at 400 V rated value</li> </ul>	19 kW
at AC-3 at 690 V rated value	15 kW
Auxiliary circuit	
number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
operating voltage of auxiliary contacts at AC maximum	500 V
continuous current of the auxiliary contact rated value	10 A
insulation voltage of the auxiliary switch rated value	500 V
Suitability	
suitability for use	
main switch	Yes
switch disconnector	Yes
EMERGENCY OFF switch	No
safety switch	Yes
maintenance/repair switch	Yes
Product details	
product details product feature can be locked into OFF position	Yes
accessories	160
product extension optional	No
motor drive	
voltage trigger	No
number of connectable NC contacts for auxiliary contacts attachable maximum	2
number of connectable NO contacts for auxiliary contacts attachable maximum	4
number of connectable CO contacts for auxiliary contacts attachable maximum	0
number of bracket locks maximum	2
hasp thickness of the bracket locks	4 6 mm
hasp thickness of the bracket locks Short circuit	4 6 mm
·	4 6 mm
Short circuit	4 6 mm 50 kA
Short circuit conditional short-circuit current with line-side fuse protection	
Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value	
Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch	50 kA
Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum	50 kA 6 kA
Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  permissible	50 kA 6 kA 6 kA
Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum permissible  l2t value with closed switch	50 kA 6 kA 6 kA
conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum	50 kA 6 kA 6 kA
Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum permissible  l2t value with closed switch	50 kA 6 kA 6 kA
conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum	50 kA 6 kA 6 kA 6 kA
Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum	50 kA 6 kA 6 kA 6 kA 21 kA2.s
Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum permissible  I2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum	50 kA 6 kA 6 kA 6 kA 21 kA2.s
Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum	50 kA 6 kA 6 kA 6 kA 21 kA2.s 21 kA2.s
conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum	50 kA 6 kA 6 kA 6 kA 21 kA2.s 21 kA2.s 21 kA2.s
conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  design of the fuse link  • for short-circuit protection of the main circuit required  • for short-circuit protection of the auxiliary switch required	50 kA  6 kA  6 kA  6 kA  21 kA2.s  21 kA2.s  21 kA2.s  fuse gL/gG: 63 A  fuse gL/gG: 10 A
conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  design of the fuse link  • for short-circuit protection of the main circuit required  • for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value	50 kA  6 kA  6 kA  6 kA  21 kA2.s  21 kA2.s  21 kA2.s  fuse gL/gG: 63 A  fuse gL/gG: 10 A
conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  design of the fuse link  • for short-circuit protection of the main circuit required  • for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value  according UL  operational current at AC according to UL 508/UL 60947-4-1	50 kA  6 kA  6 kA  21 kA2.s  21 kA2.s  21 kA2.s  fuse gL/gG: 63 A  fuse gL/gG: 10 A  63 A
Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  design of the fuse link  • for short-circuit protection of the main circuit required  • for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value  according UL  operational current at AC according to UL 508/UL 60947-4-1 rated value  operating voltage at AC at 50/60 Hz according to UL 508/UL	50 kA  6 kA  6 kA  21 kA2.s  21 kA2.s  21 kA2.s  fuse gL/gG: 63 A  fuse gL/gG: 10 A  63 A
Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  design of the fuse link  • for short-circuit protection of the main circuit required  • for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value  according UL  operational current at AC according to UL 508/UL 60947-4-1 rated value  operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value  active power [hp] at AC at 480 V according to UL 508/UL 60947-	50 kA  6 kA  6 kA  21 kA2.s  21 kA2.s  21 kA2.s  fuse gL/gG: 63 A  fuse gL/gG: 10 A  63 A  63 A
Short circuit  conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  design of the fuse link  • for short-circuit protection of the main circuit required  • for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value  according UL  operational current at AC according to UL 508/UL 60947-4-1 rated value  operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value  active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value  active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value	50 kA  6 kA  6 kA  21 kA2.s  21 kA2.s  21 kA2.s  fuse gL/gG: 63 A  fuse gL/gG: 10 A  63 A  600 V  40
conditional short-circuit current with line-side fuse protection  • at 690 V by gG fuse rated value  let-through current with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  permissible  l2t value with closed switch  • at 240 V for combination switch + gG fuse maximum  • at 440 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  • at 690 V for combination switch + gG fuse maximum  design of the fuse link  • for short-circuit protection of the main circuit required  • for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value  according UL  operational current at AC according to UL 508/UL 60947-4-1 rated value  active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value  active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value  short-time withstand current (SCCR) at 600 V according to UL	50 kA  6 kA 6 kA 6 kA  21 kA2.s 21 kA2.s 21 kA2.s fuse gL/gG: 63 A fuse gL/gG: 10 A 63 A  63 A  600 V  40

type of fuse according to UL	RK5
Connections	
AWG number as coded connectable conductor cross section solid	
• maximum	6
• minimum	14
type of connectable conductor cross-sections for copper conductor	
• solid	1x (2,535mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	1x (2.516 mm²)
stranded	1x (2,535mm²)
type of connectable conductor cross-sections for auxiliary contacts	
• solid	2x (0.75 2.5 mm²), 1x 4 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.75 1.5 mm²), 1x 2.5 mm²
stranded	2x (0.75 2.5 mm²), 1x 4 mm²
type of electrical connection	
for main current circuit	box terminal
for auxiliary contacts	connection terminals
Mechanical Design	
height	64 mm
width	64 mm
depth	93 mm
type of device	fixed mounting
fastening method	Built-in unit fixed-mounted version
fastening method	
4-hole front mounting	No
<ul> <li>front mounting with central attachment</li> </ul>	No
rail mounting	Yes
net weight	305 g
Environmental conditions	
ambient temperature during operation	
• minimum	-25 °C
• maximum	55 °C
ambient temperature during storage	
• minimum	-25 °C
• maximum	55 °C
General Product Approval	





Confirmation





Miscellaneous

General Product Approval

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping

other

EAC

CE EG-Konf.



Special Test Certificate



Confirmation

other

Environment

Miscellaneous

Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

#### Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

#### Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

### Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD2530-0TK11

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$ 

https://support.industry.siemens.com/cs/ww/en/ps/3LD2530-0TK11

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3LD2530-0TK11


**CAx-Online-Generator** 

http://www.siemens.com/cax


**Tender specifications** 


http://www.siemens.com/specifications










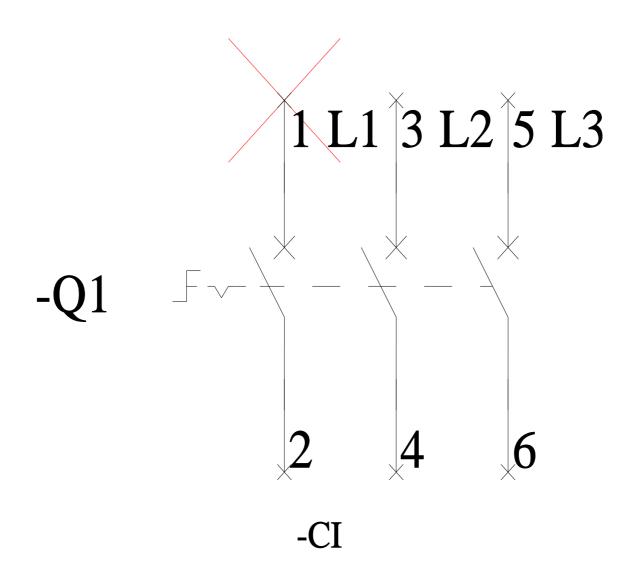

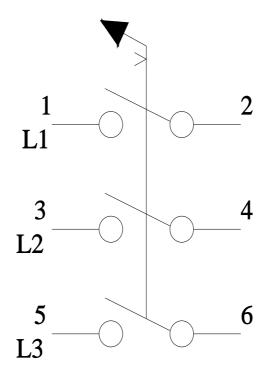

last modified: 6/20/2023 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3LD25300TK11