SIEMENS

Data sheet

3LD2866-1GP53-0US2



SENTRON, Switch disconnector 3LD, emergency switching-off switch, 3- pole, lu: 125 A, operating power / at AC-23 A 400 V: 45 kW, Molded plastic encapsulation for inch cable gland, 1 NC, 1 NO, rotary operating mechanism, red/yellow

Model		
product brand name	SENTRON	
product designation	Switch disconnector	
design of the product	EMERGENCY-STOP switch	
display version for switch position indicator manual operation	1 ON - 0 OFF	
type of switch	Molded-plastic enclosure for inch threaded joint	
design of the actuating element	Short rotary knob	
color of the actuating element	red	
design of handle	rotary operating mechanism, red/yellow	
type of the driving mechanism motor drive	No	
General technical data		
number of poles	3	
number of poles note	PE	
size of switch disconnector	4	
mechanical service life (operating cycles) typical	100 000	
electrical endurance (operating cycles)		
• at AC-23 A at 690 V	6 000	
operating frequency maximum	50 1/h	
degree of pollution	3	
Voltage		
insulation voltage rated value	690 V	
surge voltage resistance rated value	6 kV	
operating voltage		
 at AC rated value 	690 V	
operating frequency rated value		
• minimum	50 Hz	
• maximum	60 Hz	
Protection class		
protection class IP	IP65	
degree of protection NEMA rating	1, 4X, 12	
protection class IP on the front	IP65	
Dissipation		
power loss [W] for rated value of the current at AC in hot operating state per pole	12 W	
Main circuit		
operational current		
• at AC-21 at 690 V rated value	125 A	
• at AC-21 A at 240 V rated value	125 A	
 at AC-21 A at 400 V rated value 	125 A	

 at AC-21 A at 440 V rated value 	125 A
 at AC-23 A at 400 V rated value 	80 A
operating power	
 at AC-23 A at 240 V rated value 	22 kW
 at AC-23 A at 400 V rated value 	45 kW
 at AC-23 A at 440 V rated value 	45 kW
 at AC-23 A at 690 V rated value 	37 kW
• at AC-3 at 240 V rated value	22 kW
at AC-3 at 400 V rated value	37 kW
at AC-3 at 690 V rated value	30 kW
Auxiliary circuit	
number of CO contacts for auxiliary contacts	0
•	
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1
operating voltage of auxiliary contacts at AC maximum	500 V
continuous current of the auxiliary contact rated value	10 A
insulation voltage of the auxiliary switch rated value	500 V
Suitability	
suitability for use main switch	Yes
suitability for use switch disconnector	Yes
suitability for use EMERGENCY OFF switch	Yes
suitability for use safety switch	Yes
suitability for use maintenance/repair switch	Yes
Product details	
product feature can be locked into OFF position	Yes
accessories	
product extension optional	
motor drive	No
voltage trigger	No
number of connectable NC contacts for auxiliary contacts	2
attachable maximum	
number of connectable NO contacts for auxiliary contacts	3
attachable maximum	
attachable maximum number of connectable CO contacts for auxiliary contacts attachable maximum	0
number of connectable CO contacts for auxiliary contacts	0 3
number of connectable CO contacts for auxiliary contacts attachable maximum	
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum	3
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks	3
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse	3
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value	3 4 8 mm
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch	3 4 8 mm
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum	3 4 8 mm 20 kA 10 kA
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum	3 4 8 mm 20 kA 10 kA 10 kA
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum	3 4 8 mm 20 kA 10 kA
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum	3 4 8 mm 20 kA 10 kA 10 kA
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum	3 4 8 mm 20 kA 10 kA 10 kA
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum	3 4 8 mm 20 kA 10 kA 10 kA 10 kA
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum	3 4 8 mm 20 kA 10 kA 10 kA 10 kA 10 kA
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum	3 4 8 mm 20 kA 10 kA 10 kA 10 kA 10 kA 10 kA 10 kA
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for comb	3 4 8 mm 20 kA 10 kA 10 kA 10 kA 10 kA 10 kA 10 kA 10 kA 10 kA 2.5 104 kA2.5 104 kA2.5
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum	3 4 8 mm 20 kA 10 kA
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 640 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for comb	3 4 8 mm 20 kA 10 kA
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 690 V by combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combi	3 4 8 mm 20 kA 10 kA
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for comb	3 4 8 mm 20 kA 10 kA
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum permissible l2t value with closed switch • at 240 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum eat 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse ma	3 4 8 mm 20 kA 10 kA 10 kA 10 kA 10 kA 10 kA 10 kA 10 kA 20 kA 10 k 10 kA 10 kA
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for cond	3 4 8 mm 20 kA 10 kA 10 kA 10 kA 10 kA 10 kA 10 kA 10 kA 20 kA 10 kA 12 S
number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V by or combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for co	3 4 8 mm 20 kA 10 kA

short-time withstand current (SCCR) at 600 V according to	10 kA
UL 508/UL 60947-4-1 continuous current of upstream fuse according to UL rated	200 A
value type of fuse according to UL	RK5
onnections	
AWG number as coded connectable conductor cross section solid maximum	
•	1
•	12
type of connectable conductor cross-sections for copper conductor	
• solid	1x (450mm²)
 finely stranded with core end processing 	1x (435mm²)
• stranded	1x (450mm²)
type of connectable conductor cross-sections for auxiliary contacts	
• solid	lateral auxiliary switch 2x (0,75 2,5mm ²), 1x 4mm ² ; front auxiliary switch 1x (0,75 2,5mm ²)
 finely stranded with core end processing 	lateral auxiliary switch 2x (0,75 1,5mm ²), 1x 2,5mm ² ; front auxiliary switch 1x 2,5mm ²
• stranded	lateral auxiliary switch 2x (0,75 2,5mm ²), 1x 4mm ² ; front auxiliary switch 1x (0,75 2,5mm ²)
type of electrical connection	
for main current circuit	box terminal
for auxiliary contacts	connection terminals
echanical Design	
height	302 mm
width	212 mm
depth	181 mm
type of device	fixed mounting
fastening method	Complete unit in enclosure
fastening method	
• 4-hole front mounting	No Yes
 front mounting with central attachment rail mounting 	No
net weight	1 853 g
nvironmental conditions	1 000 g
ambient temperature during operation	
minimum	-25 °C
• maximum	55 °C
ambient temperature during storage	
minimum	-25 °C
• maximum	55 °C
pprovals Certificates	
General Product Approval	
CCC CSA CE	
General Product Approval Test Certificat	es Marine / Shipping other
Miscellaneous Miscellaneo	us <u>Confirmation</u> <u>Miscellaneous</u>
N de la Ulas e una serie de la companya de la compa	Lloyd's Register

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD2866-1GP53-0US2

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

firmations

https://support.industry.siemens.com/cs/ww/en/ps/3LD2866-1GP53-0US2

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD2866-1GP53-0US2


CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications


http://www.siemens.com/specifications

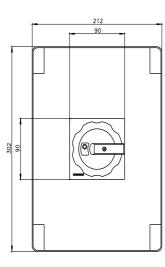

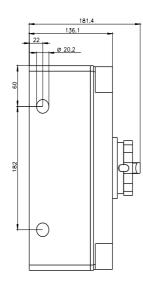

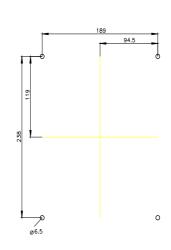



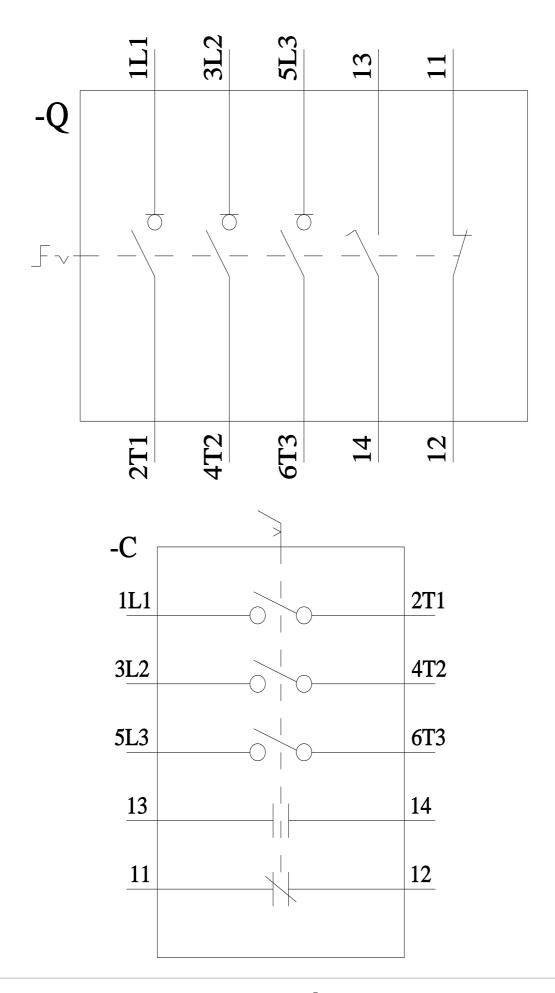

last modified:

6/20/2023 🖸

Subject to change without notice © Copyright Siemens

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3LD28661GP530US2