SIEMENS

Data sheet

3LD5410-0TK13



SENTRON, Molded case switch 3LD5 UL, Emergency switching-off, 3-pole, certified according to UL489 UL60947-4-1 and IEC60947-3, UL: 100A, SCCR 65kA at 480VAC, Operating power at 480VAC 3-phase: 60hp, IEC: 100A, Operating power at AC-23A at 400V: 45kW, floor mounting with door coupling rotary operating mechanism, defeatable, emergency switching-off, 4-hole mounting of the handle, without tolerance compensation, incl. terminal covers for the infeed side

Model	
product brand name	SENTRON
product designation	Switch disconnector
design of the product	EMERGENCY-STOP switch
display version for switch position indicator manual operation	1 ON - 0 OFF
type of switch	Floor mounting with door coupling
design of the actuating element	door-coupling rotary operating mechanism
color of the actuating element	red
design of handle	rotary operating mechanism, red/yellow
type of the driving mechanism motor drive	No
General technical data	
number of poles	3
size of switch disconnector	3
mechanical service life (operating cycles) typical	100 000
electrical endurance (operating cycles)	
• at AC-23 A at 690 V	6 000
operating frequency maximum	50 1/h
degree of pollution	3
Voltage	
insulation voltage rated value	690 V
surge voltage resistance rated value	6 kV
Protection class	
protection class IP	IP65
degree of protection NEMA rating	1, 3R, 4X, 12
protection class IP on the front	IP65
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	36 W
Main circuit	
operational current	
• at AC-21 at 690 V rated value	100 A
 at AC-21 A at 240 V rated value 	100 A
 at AC-21 A at 400 V rated value 	100 A
 at AC-21 A at 440 V rated value 	100 A
• at AC-23 A at 400 V rated value	100 A
operating power	
• at AC-23 A at 240 V rated value	30 kW
• at AC-23 A at 440 V rated value	45 kW
• at AC-23 A at 690 V rated value	37 kW
• at AC-3 at 240 V rated value	30 kW

• at AC-3 at 400 V rated value	45 kW
at AC-3 at 690 V rated value	30 kW
Auxiliary circuit	2
number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
operating voltage of auxiliary contacts at AC maximum	500 V
continuous current of the auxiliary contact rated value	10 A 500 V
insulation voltage of the auxiliary switch rated value Suitability	500 V
suitability for use	
main switch	Yes
switch disconnector	Yes
EMERGENCY OFF switch	Yes
safety switch	Yes
maintenance/repair switch	Yes
Product details	
special product feature	defeatable door-coupling handle
product feature can be locked into OFF position	Yes
accessories	
product extension optional	
motor drive	No
voltage trigger	No
number of connectable NC contacts for auxiliary contacts attachable maximum	3
number of connectable NO contacts for auxiliary contacts attachable maximum	5
number of connectable CO contacts for auxiliary contacts attachable maximum	0
number of bracket locks maximum	3
hasp thickness of the bracket locks	5 7.5 mm
Short circuit	
Short circuit conditional short-circuit current with line-side fuse protection	
	50 kA
conditional short-circuit current with line-side fuse protection	50 kA 50 kA
conditional short-circuit current with line-side fuse protection • at 440 V by gG fuse rated value	
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value 	
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch 	50 kA
conditional short-circuit current with line-side fuse protection • at 440 V by gG fuse rated value • at 690 V by gG fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum	50 kA 16 kA
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum 	50 kA 16 kA 16 kA
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum 	50 kA 16 kA 16 kA
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum 	50 kA 16 kA 16 kA 15 kA
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum permissible l2t value with closed switch at 240 V for combination switch + gG fuse maximum 	50 kA 16 kA 16 kA 15 kA 223 kA2.s
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum 	50 kA 16 kA 16 kA 15 kA 223 kA2.s 223 kA2.s
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum 	50 kA 16 kA 16 kA 15 kA 223 kA2.s 223 kA2.s
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum permissible l2t value with closed switch at 240 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum 	50 kA 16 kA 16 kA 15 kA 223 kA2.s 223 kA2.s 223 kA2.s
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum design of the fuse link for short-circuit protection of the main circuit required for short-circuit protection of the auxiliary switch required 	50 kA 16 kA 16 kA 15 kA 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s Euse gG: 125 A
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum permissible l2t value with closed switch at 240 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum 	50 kA 16 kA 16 kA 15 kA 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s Fuse gG: 125 A fuse gL/gG: 10 A
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum design of the fuse link for short-circuit protection of the main circuit required for short-circuit protection of the auxiliary switch required 	50 kA 16 kA 16 kA 15 kA 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum design of the fuse link for short-circuit protection of the main circuit required for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value according UL operational current at AC according to UL 489/UL 60947-4-1 	50 kA 16 kA 16 kA 15 kA 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s Fuse gG: 125 A fuse gL/gG: 10 A 125 A
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum design of the fuse link for short-circuit protection of the main circuit required for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value according UL operational current at AC according to UL 489/UL 60947-4-1 rated value operational current at AC according to UL 508/UL 60947-4-1 	50 kA 16 kA 16 kA 15 kA 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s 100 A
 conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum design of the fuse link for short-circuit protection of the main circuit required for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value according UL operational current at AC according to UL 489/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 489 rated 	50 kA 16 kA 16 kA 15 kA 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s 100 A 100 A 100 A
conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum design of the fuse link for short-circuit protection of the main circuit required for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value according UL operational current at AC according to UL 489/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 489 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 	50 kA 16 kA 16 kA 15 kA 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s Fuse gG: 125 A fuse gL/gG: 10 A 125 A 100 A 100 A 480 V
conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum design of the fuse link for short-circuit protection of the main circuit required for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value according UL operational current at AC according to UL 489/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 489 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 	50 kA 16 kA 16 kA 16 kA 15 kA 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s Fuse gG: 125 A fuse gL/gG: 10 A 125 A 100 A 100 A 480 V
conditional short-circuit current with line-side fuse protection at 440 V by gG fuse rated value at 690 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum permissible l2t value with closed switch at 240 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum design of the fuse link for short-circuit protection of the main circuit required operational current of upstream fuse rated value according UL operational current at AC according to UL 489/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 489 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value 	50 kA 16 kA 16 kA 15 kA 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s 223 kA2.s 100 A 100 A 100 A 100 A 480 V 480 V 60

Connections	
AWG number as coded connectable conductor cross section	
solid	
• minimum	3
• maximum	4/0
AWG number as coded connectable conductor cross section solid according to UL 489	
• minimum	3
• maximum	4/0
AWG number as coded connectable conductor cross section solid according to CSA C22.2 No. 5-16	
• minimum	3
• maximum	2/0
type of connectable conductor cross-sections for copper conductor	
• solid	1x (16185mm²)
 finely stranded with core end processing 	1x (16150mm²)
stranded	1x (16185mm²)
type of connectable conductor cross-sections for auxiliary contacts	
• solid	lateral auxiliary switch 2x (0,75 2,5mm ²), 1x 4mm ² ; front auxiliary switch 1x (0,75 2,5mm ²)
• finely stranded with core end processing	lateral auxiliary switch 2x (0,75 1,5mm²), 1x 2,5mm²; front auxiliary switch 1x 2,5mm²
• stranded	lateral auxiliary switch 2x (0,75 2,5mm²), 1x 4mm²; front auxiliary switch 1x (0,75 2,5mm²)
type of electrical connection	
 for main current circuit 	box terminal
 for auxiliary contacts 	connection terminals
lechanical Design	
height	178 mm
width	113 mm
depth	158 mm
type of device	fixed mounting
fastening method	Built-in unit fixed-mounted version
fastening method	
 4-hole front mounting 	Yes
 front mounting with central attachment 	No
rail mounting	No
net weight	1 900 g
Environmental conditions	
ambient temperature during operation	
• minimum	-25 °C
• maximum	55 °C
ambient temperature during storage	
• minimum	-25 °C
• maximum	55 °C
General Product Approval	Declaration of Conformity
Confirmation UL	
other	
outer	

Miscellaneous

Confirmation

Further information

Siemens has decided to exit the Russian market (see here).


https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business


Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD5410-0TK13 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3LD5410-0TK13 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD5410-0TK13 CAx-Online-Generator http://www.siemens.com/cax Tender specifications

http://www.siemens.com/specifications

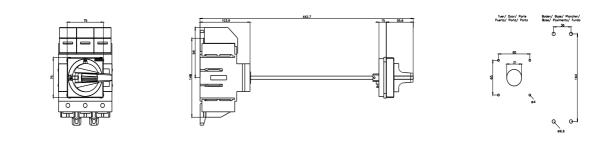



last modified:

6/20/2023 🖸

8/18/2023

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3LD54100TK13