3RA2110-0BE15-1AP0

## **Data sheet**



Load feeder fuseless, Direct-on-line starting 400 V AC, Size S00 0.14...0.20 A 230 V AC Spring-type terminal for installation on standard mounting rail (also fulfills type of coordination 1) Type of coordination 2, Iq = 150 kA 1 NO (contactor)

product brand name	SIRIUS	
product designation	Direct (on-line) starter	
design of the product	for DIN-rail or screw mounting	
product type designation	3RA21	
manufacturer's article number		
<ul> <li>of the supplied contactor</li> </ul>	3RT2015-2AP01	
<ul> <li>of the supplied circuit-breakers</li> </ul>	3RV2011-0BA20	
<ul> <li>of the supplied link module</li> </ul>	3RA2911-2AA00	
General technical data		
size of the circuit-breaker	S00	
size of load feeder	S00	
power loss [W] for rated value of the current		
<ul> <li>at AC in hot operating state per pole</li> </ul>	2 W	
without load current share typical	4.2 W	
insulation voltage with degree of pollution 3 at AC rated value	690 V	
surge voltage resistance rated value	6 kV	
degree of protection NEMA rating	other	
shock resistance according to IEC 60068-2-27	6g / 11 ms	
mechanical service life (operating cycles) of contactor typical	30 000 000	
type of assignment	2	
reference code according to IEC 81346-2:2019	Q	
Substance Prohibitance (Date)	10/01/2009	
SVHC substance name	Lead - 7439-92-1	
Weight	0.618 kg	
Ambient conditions		
ambient temperature		
<ul> <li>during operation</li> </ul>	-20 +60 °C	
during storage	-50 +80 °C	
during transport	-50 +80 °C	
temperature compensation	-20 +60 °C	
relative humidity during operation	10 95 %	
Main circuit		
number of poles for main current circuit	3	
design of the switching contact	electromechanical	
adjustable current response value current of the current- dependent overload release	0.14 0.2 A	
operating voltage		
rated value	690 V	
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V	
<ul> <li>at AC-3e rated value maximum</li> </ul>	690 V	

an arcting fraguency rated value	E0 60 Hz
operating frequency rated value	50 60 Hz
operational current	
<ul> <li>at AC-3 at 400 V rated value</li> </ul>	0.2 A
at AC-3e at 400 V rated value	0.2 A
operating power	
• at AC-3	
— at 400 V rated value	60 W
• at AC-3e	
— at 400 V rated value	60 W
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
at 50 Hz rated value	230 V
at 60 Hz rated value	230 V
apparent holding power of magnet coil at AC	4.2 VA
• at 50 Hz	4.2 VA
• at 60 Hz	3.3 VA
inductive power factor with the holding power of the coil	0.25
• at 50 Hz	0.25
• at 60 Hz	0.25
Auxiliary circuit	
product extension auxiliary switch	Yes
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release	thermal (bimetallic)
response value current of instantaneous short-circuit trip unit	2.6 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	0.2 A
at 600 V rated value	0.2 A
Short-circuit protection	
Short-circuit protection	Voc
product function short circuit protection	Yes
product function short circuit protection design of the short-circuit trip	Yes magnetic
product function short circuit protection design of the short-circuit trip conditional short-circuit current (Iq)	magnetic
product function short circuit protection design of the short-circuit trip conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value	
product function short circuit protection design of the short-circuit trip conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions	magnetic 150 000 A
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position	magnetic  150 000 A  vertical
product function short circuit protection design of the short-circuit trip conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value Installation/ mounting/ dimensions	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position	magnetic  150 000 A  vertical
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing • for grounded parts	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm  20 mm 0 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing  • for grounded parts — forwards — backwards — upwards	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm  20 mm 0 mm 50 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing  • for grounded parts  — forwards — backwards — upwards — at the side — downwards	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail  198 mm  45 mm  97 mm  20 mm  0 mm  50 mm  20 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm  20 mm 0 mm 50 mm 20 mm 10 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — forwards	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm  20 mm 0 mm 50 mm 20 mm 10 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — backwards  • for live parts  — forwards  — backwards	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail  198 mm  45 mm  97 mm  20 mm  0 mm  10 mm  20 mm  0 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing  • for grounded parts  — forwards  — backwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — backwards  — torwards  — torwards  — downwards  • for live parts  — forwards  — backwards  — backwards  — upwards	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm  20 mm 0 mm 50 mm 10 mm 0 mm 50 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — backwards  — upwards  - downwards  • for live parts  — forwards  — backwards  — backwards  — backwards  — backwards  — downwards  — downwards	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm  20 mm 0 mm 50 mm 10 mm  50 mm 0 mm 50 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — upwards  — downwards  — at the side  — downwards  — at the side	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm  20 mm 0 mm 50 mm 10 mm 0 mm 50 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — upwards  — at the side  — downwards  — at the side  Connections/ Terminals	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm  20 mm 0 mm 50 mm 10 mm  50 mm 0 mm 50 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — upwards  — downwards  — at the side  — downwards  — at the side	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm  20 mm 0 mm 50 mm 10 mm 50 mm 0 mm 50 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — upwards  — at the side  — downwards  — at the side  Connections/ Terminals	magnetic  150 000 A  vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm  20 mm 0 mm 50 mm 10 mm 50 mm 0 mm 50 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing  • for grounded parts  — forwards — backwards — upwards — at the side — downwards  • for live parts — forwards — backwards — upwards — a the side — downwards — to a the side — downwards — backwards — upwards — at the side Connections/ Terminals  type of electrical connection	magnetic  150 000 A  Vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm  20 mm 0 mm 50 mm 10 mm 10 mm 50 mm 10 mm 50 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — upwards  — at the side  — downwards  — to newards  — at the side  — downwards  — backwards  — upwards  — backwards  — upwards  — backwards  — upwards  — to newards  — at the side  Connections/ Terminals  type of electrical connection  • for main current circuit	magnetic  150 000 A  Vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm  20 mm 0 mm 50 mm 10 mm 20 mm 0 mm 50 mm 10 mm 50 mm 50 mm 50 mm 50 mm
product function short circuit protection  design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — upwards  — at the side  — downwards  — the side  — downwards  — at the side  — connections/ Terminals  type of electrical connection  • for main current circuit  • for auxiliary and control circuit	magnetic  150 000 A  Vertical screw and snap-on mounting onto 35 mm DIN rail 198 mm 45 mm 97 mm  20 mm 0 mm 50 mm 10 mm 20 mm 0 mm 50 mm 10 mm 50 mm 50 mm 50 mm 50 mm

Electrical Safety		
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front	
Communication/ Protocol		
protocol is supported		
<ul> <li>PROFINET IO protocol</li> </ul>	No	
PROFIsafe protocol	No	
protocol is supported AS-Interface protocol	No	
Approvals Certificates		

**General Product Approval** 

For use in hazardous locations

**Test Certificates** 











Special Test Certificate

**Test Certificates** 

Marine / Shipping

Type Test Certificates/Test Report











Marine / Shipping

other

Railway

**Environment** 





Confirmation

Special Test Certificate Environmental Confirmations

## Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2110-0BE15-1AP0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2110-0BE15-1AP0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2110-0BE15-1AP0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA2110-0BE15-1AP0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2110-0BE15-1AP0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2110-0BE15-1AP0&objecttype=14&gridview=view1

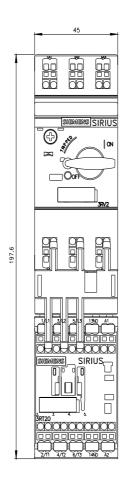

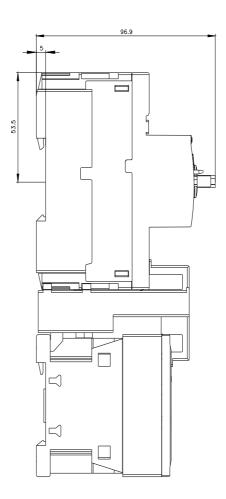



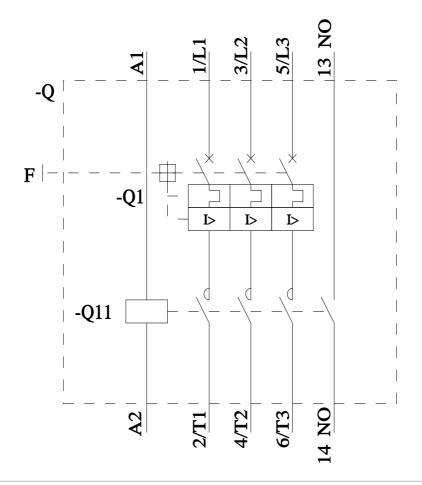

last modified: 4/1/2025 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Siemens:

3RA21100BE151AP0