# **SIEMENS**

#### **Data sheet**

### 3RA2110-0HH15-1BB4



Load feeder fuseless, Direct-on-line starting 400 V AC, Size S00 0.55...0.80 A 24 V DC Spring-type terminal for 60 mm busbar systems (also fulfills type of coordination 1) Type of coordination 2, Iq = 150 kA 1 NO (contactor)

product brand name	SIRIUS
product designation	Direct (on-line) starter
design of the product	for 60 mm busbars
product type designation	3RA21
manufacturer's article number	
<ul> <li>of the supplied contactor</li> </ul>	3RT2015-2BB41
<ul> <li>of the supplied circuit-breakers</li> </ul>	3RV2011-0HA20
<ul> <li>of the supplied busbar adapter</li> </ul>	<u>8US1251-5DT11</u>
<ul> <li>of the supplied link module</li> </ul>	3RA2911-2AA00
General technical data	
size of the circuit-breaker	S00
size of load feeder	S00
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state per pole</li> </ul>	2.6 W
without load current share typical	4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
degree of protection NEMA rating	other
shock resistance according to IEC 60068-2-27	6g / 11 ms
mechanical service life (operating cycles) of contactor typical	30 000 000
type of assignment	2
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001
reference code according to IEC 81346-2:2019	Q
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Blei - 7439-92-1
Ambient conditions	
ambient temperature	
<ul> <li>during operation</li> </ul>	-20 +60 °C
<ul> <li>during storage</li> </ul>	-50 +80 °C
during transport	-50 +80 °C
temperature compensation	-20 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current- dependent overload release	0.55 0.8 A
operating voltage	
• rated value	690 V

<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current	
<ul> <li>at AC-3 at 400 V rated value</li> </ul>	0.8 A
at AC-3e at 400 V rated value	0.8 A
operating power	
• at AC-3	
— at 400 V rated value	180 W
• at AC-3e	
— at 400 V rated value	180 kW
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC	
rated value	24 V
rated value	24 24 V
holding power of magnet coil at DC	4 W
Auxiliary circuit	
product extension auxiliary switch	Yes
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release	thermal (bimetallic)
response value current of instantaneous short-circuit trip unit	10 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	0.0 A
• at 480 V rated value	0.8 A
at 600 V rated value	0.8 A
yielded mechanical performance [hp]	
• for 3-phase AC motor	
— at 460/480 V rated value	0.5 hp
— at 575/600 V rated value	0.5 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	Yes magnetic
design of the short-circuit trip conditional short-circuit current (Iq)	magnetic
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value	
design of the short-circuit trip conditional short-circuit current (Iq)	magnetic
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value	magnetic
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions	magnetic 150 000 A
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position	magnetic  150 000 A  vertical
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method height	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm 45 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm 45 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm 45 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing  • for grounded parts — forwards — backwards	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm  20 mm 0 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing  • for grounded parts — forwards — backwards — upwards	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems  260 mm  45 mm  155 mm  20 mm  0 mm  50 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems  260 mm  45 mm  155 mm  20 mm  0 mm  50 mm  20 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems  260 mm  45 mm  155 mm  20 mm  0 mm  50 mm  20 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing  • for grounded parts — forwards — backwards — upwards — at the side — downwards  • for live parts	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm  20 mm 0 mm 50 mm 20 mm 10 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — backwards  • for live parts  — forwards  — backwards	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems  260 mm  45 mm  155 mm  20 mm  0 mm  50 mm  10 mm  10 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — backwards  — upwards  • for live parts  — forwards  — backwards  — upwards  — backwards  — upwards	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm  20 mm 0 mm 50 mm 10 mm 0 mm 50 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — backwards  — backwards  — upwards  — torwards  — downwards  • for live parts  — backwards  — upwards  — backwards  — upwards  — backwards  — upwards  — backwards  — upwards  — downwards	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm  20 mm 0 mm 50 mm 10 mm 0 mm 5 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — backwards  — upwards  — backwards  — upwards  — downwards  — of orwards  — backwards  — at the side  — downwards  — backwards  — upwards  — at the side  — downwards  — at the side	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm  20 mm 0 mm 50 mm 10 mm 0 mm 50 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing  • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — a the side — downwards — at the side  Connections/ Terminals	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm  20 mm 0 mm 50 mm 10 mm 0 mm 5 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing  • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — at the side — downwards — to forwards — backwards — at the side — downwards — at the side — downwards — at the side Connections/ Terminals  type of electrical connection	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm  20 mm 0 mm 50 mm 10 mm 10 mm 10 mm 50 mm 10 mm 10 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing  • for grounded parts  — forwards  — backwards  — upwards  — at the side  — downwards  • for live parts  — forwards  — backwards  — upwards  — at the side  — downwards  — at the side  — downwards  — at the side  — downwards  — upwards  — at the side  — downwards  — torwards  — at the side  Connections/ Terminals  type of electrical connection  • for main current circuit	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm  20 mm 0 mm 50 mm 10 mm 10 mm 50 mm 10 mm 50 mm 10 mm 50 mm 10 mm 50 mm
design of the short-circuit trip  conditional short-circuit current (Iq)  • at 400 V according to IEC 60947-4-1 rated value  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing  • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — at the side — downwards — to runwards — backwards — upwards — backwards — upwards — at the side Connections/ Terminals  type of electrical connection	magnetic  150 000 A  vertical for snapping onto 60 mm busbar systems 260 mm 45 mm 155 mm  20 mm 0 mm 50 mm 10 mm 10 mm 10 mm 50 mm 10 mm 10 mm

B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
<ul> <li>with high demand rate according to SN 31920</li> </ul>	73 %
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Communication/ Protocol	
protocol is supported	
<ul> <li>PROFINET IO protocol</li> </ul>	No
PROFIsafe protocol	No
protocol is supported AS-Interface protocol	No
Certificates/ approvals	

**General Product Approval** 

For use in hazardous locations

**Declaration of Conformity** 

Confirmation











**Test Certificates** 

Marine / Shipping

Special Test Certificate

Type Test Certificates/Test Report









Marine / Shipping

other

Railway

Dangerous Good







Confirmation

Vibration and Shock

**Transport Information** 

#### Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2110-0HH15-1BB4

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2110-0HH15-1BB4

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2110-0HH15-1BB4

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


 $\underline{\text{http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA2110-0HH15-1BB4\&lang=en}}$ 


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2110-0HH15-1BB4/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2110-0HH15-1BB4&objecttype=14&gridview=view1

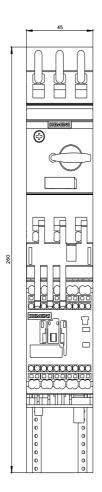

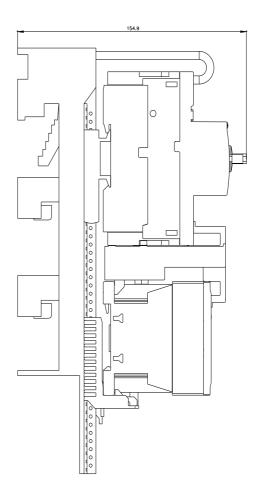



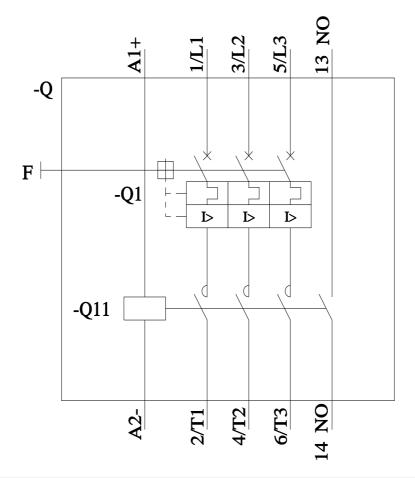

last modified: 8/7/2023 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RA21100HH151BB4